

Sensor Array Bar



Datasheet



WARNING:


- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

Models


Model	Beams	Supply Current	Range	Sensing Mode	Output
SAB-497RB1LP6-Q5E	6	150 mA	1 m (39 in) when using a BRT-THG-2 reflector tape as a target 3 m (118 in) when using side-by-side BRT-92×92C reflectors or side-by-side BRT-77×77C reflectors as targets	Polarized Retroreflective, Visible Red 624 nm	Dark Operate, Bipolar
SAB-497AB1LP6-Q5E	6	150 mA			Light Operate, Bipolar
SAB-998RB1LP13-Q5E	13	150 mA			Dark Operate, Bipolar
SAB-484RB1LP10-Q5E	10	150 mA			Dark Operate, Bipolar
SAB-497RB1DS6-Q5E	6	150 mA	200 mm (8 in) when using a 90% white card as a target 762 mm (30 in) when using a 90% white card as a target	Diffuse, Infrared, 940 nm	Dark Operate, Bipolar
SAB-497AB1DS6-Q5E	6	150 mA			Light Operate, Bipolar
SAB-998AB1DXL13-Q5E	13	325 mA			Light Operate, Bipolar

Wiring Diagram

Dark Operate




Light Operate



Key

1. Brown
2. White
3. Blue
4. Black

4-Pin Male Connector



Specifications

Supply Voltage and Current

10 V DC to 30 V DC (10% max. ripple)

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Output Configuration

Solid-state Bipolar: NPN and PNP (current sinking and sourcing)

Rating: 100 mA maximum each output at 25 °C

Off-state leakage current:

NPN: less than 200 µA at 30 V DC

PNP: less than 10 µA at 30 V DC

On-state saturation voltage:

NPN: less than 1.6 V at 100 mA

PNP: less than 3.0 V at 100 mA

Protected against false pulse on power-up and continuous overload or short circuit of outputs.

Sensing Beam

Polarized Retroreflective: Visible red, 624 nm

Diffuse: Infrared, 940 nm

Output Response

Polarized Retroreflective: 1.5 ms on/off

Diffuse: 3 ms on/off

Operating Conditions

-20 °C to +55 °C (-4 °F to +131°F)

95% at +50 °C maximum relative humidity (non-condensing)

Environmental Rating

IP50

Indicators

Green on: Power on


Amber on: Output on

Sensor Amber on: Light sensed

Connection

150 mm (6 in) PVC cable with a 4-pin M12 male quick disconnect

Dimensions

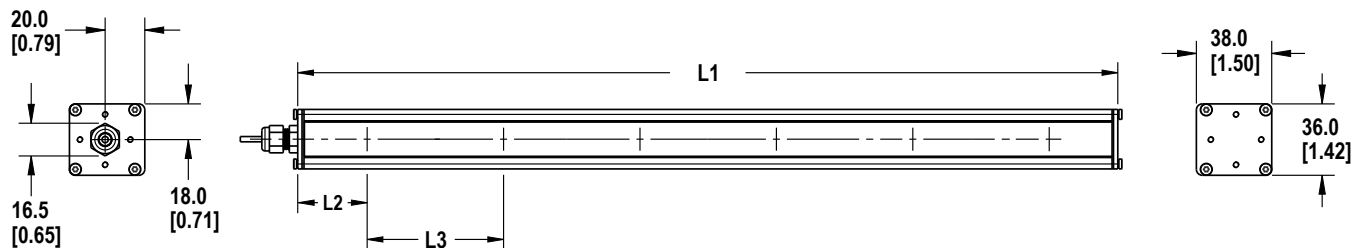

Length L1	First Beam L2	Beam to Beam L3
496.3 mm (19.5 in)	42.0 mm (1.7 in)	82.6 mm (3.25 in)
998 mm (39.3 in)	42.0 mm (1.7 in)	72.6 mm (3.00 in)

Accessories


The SABRW is a replacement window for the diffuse model Sensor Array Bar. Replacement windows are available in the lengths listed below. The replacement window attaches using the pre-installed adhesive tape.

Replacement Window Model	Sensor Length	Window Material	Material Thickness
SABRW998P	998 mm	Polycarbonate ¹	1.5 mm (0.06 in)

Brackets


SMBSAB-IN

- Mounting bracket facing in
- 12 gauge steel



SMBSAB-OUT

- Mounting bracket facing out
- 12 gauge steel



¹ For diffuse model Sensor Array Bars only

Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to:

www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

FCC Part 15 Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Industry Canada

This device complies with CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme NMB-3(B). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.



more sensors, more solutions