

withdraw. non-aut. circuit-b. with guide frame 3-pole, size III, IEC In=4000A to 690V, AC50/60Hz Icu=100kA at 500V w. connection flange without overcurrent release Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 4NO+4NC C01= Mechanical switching cycle counter C22= Ready indicator R15= Position signaling switch, withdrawable part 3 changeover contacts R21= Shutter 2-part can be locked with padlock

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1340-4AA38-4GA4-Z C01+C22+R15+R21>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1340-4AA38-4GA4-Z C01+C22+R15+R21>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WL1340-4AA38-4GA4-Z C01+C22+R15+R21](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1340-4AA38-4GA4-Z C01+C22+R15+R21)


#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

<http://www.siemens.com/specifications>

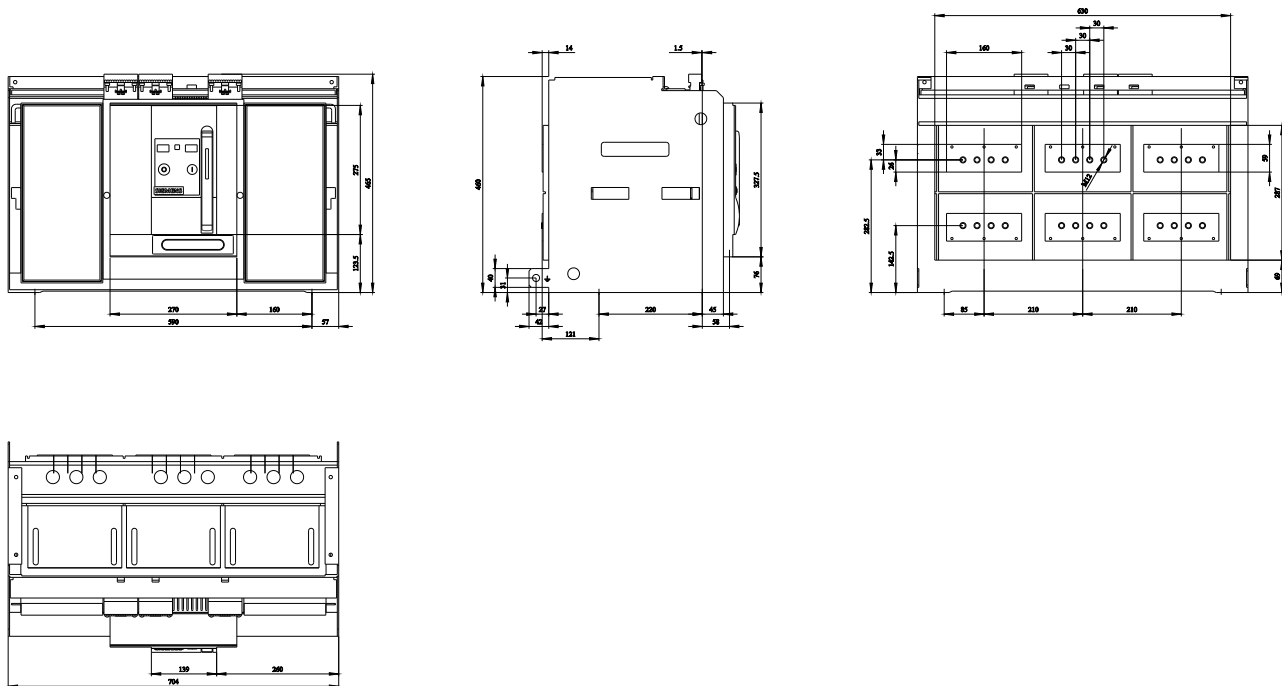

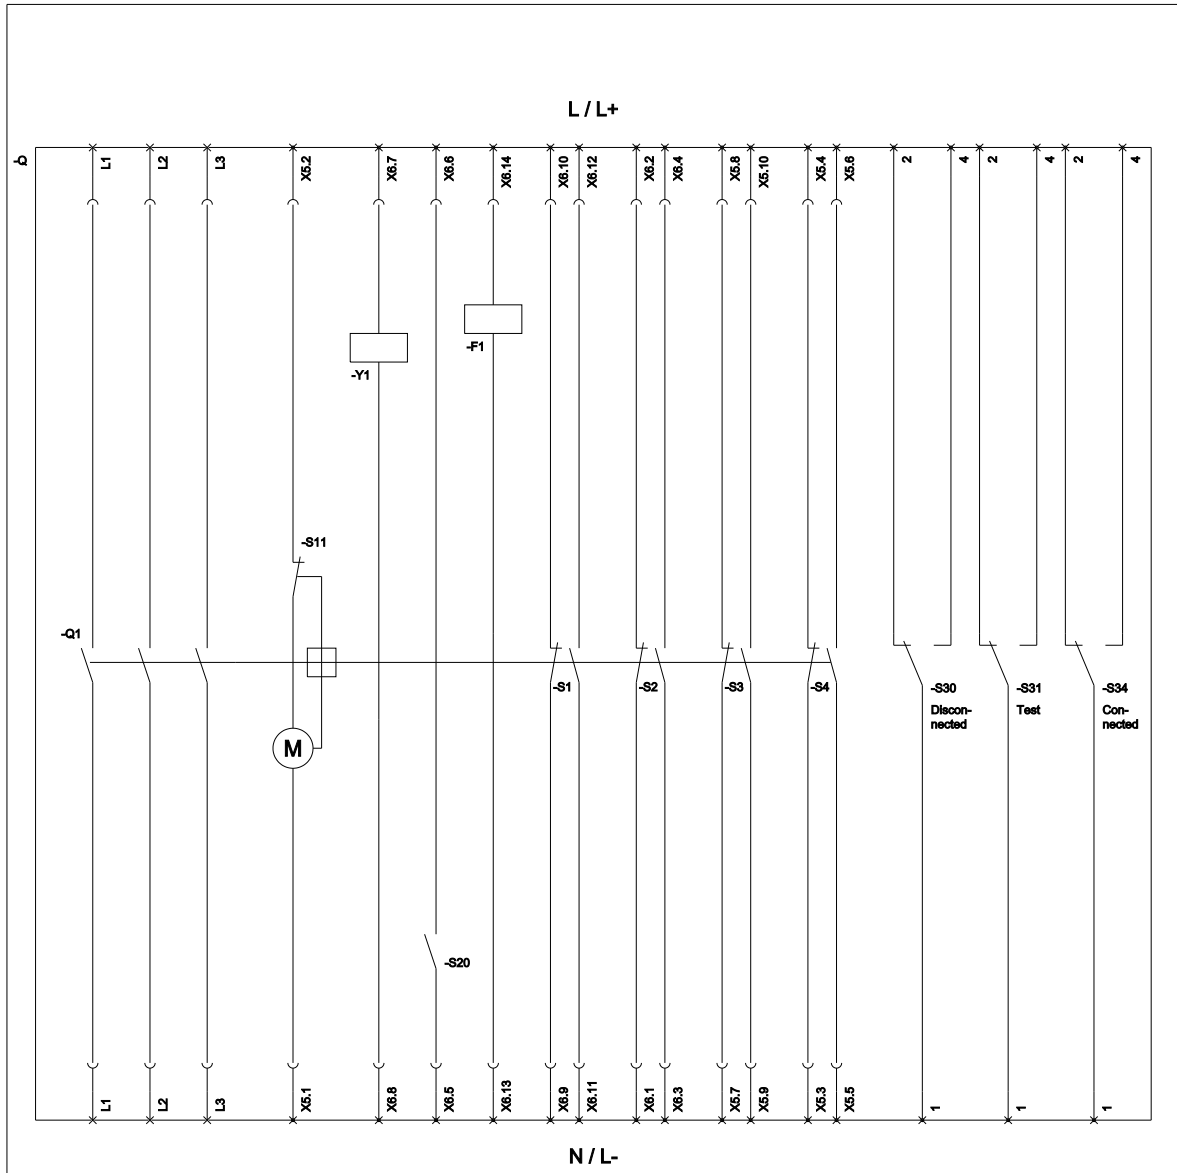

S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorsbetriebschalter, wenn Feder gespannt); F1 (1st auxiliary release / Erster Hilfsauslöser);  
 S1 - S8 (Auxiliary switch / Hilfschalter); S20 (Ready to close signalling switch / Einschaltbereitschaftsmeldesalter); Y1 (Closing coil / Einschaltmagnet);

last modified:

2/29/2024

