

fixed-mounted circuit breaker 3-pole, size II, IEC In=2000A to 690V, AC50/60Hz  
Icu=100kA at 500V frnt.conn. top/bot. dual-hole Overcurrent release ETU 25 LSI  
protection adjustable 0.4-1 in With manual operating mechanism with storage with  
mechanical request without 1st auxiliary release With 2nd auxiliary release "R", F3  
Undervoltage, instant. 24 V DC 2NO+2NC C22= Ready indicator K07= Tripped  
signaling contact, 1 CO not possible with option F02 M06= Motor drive, Drive motor  
AC 50/60 Hz 208-240 V or 220-250 V DC

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1220-4CB34-1AJ2-Z C22+K07+M06>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1220-4CB34-1AJ2-Z C22+K07+M06>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WL1220-4CB34-1AJ2-Z C22+K07+M06](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1220-4CB34-1AJ2-Z C22+K07+M06)


#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

<http://www.siemens.com/specifications>



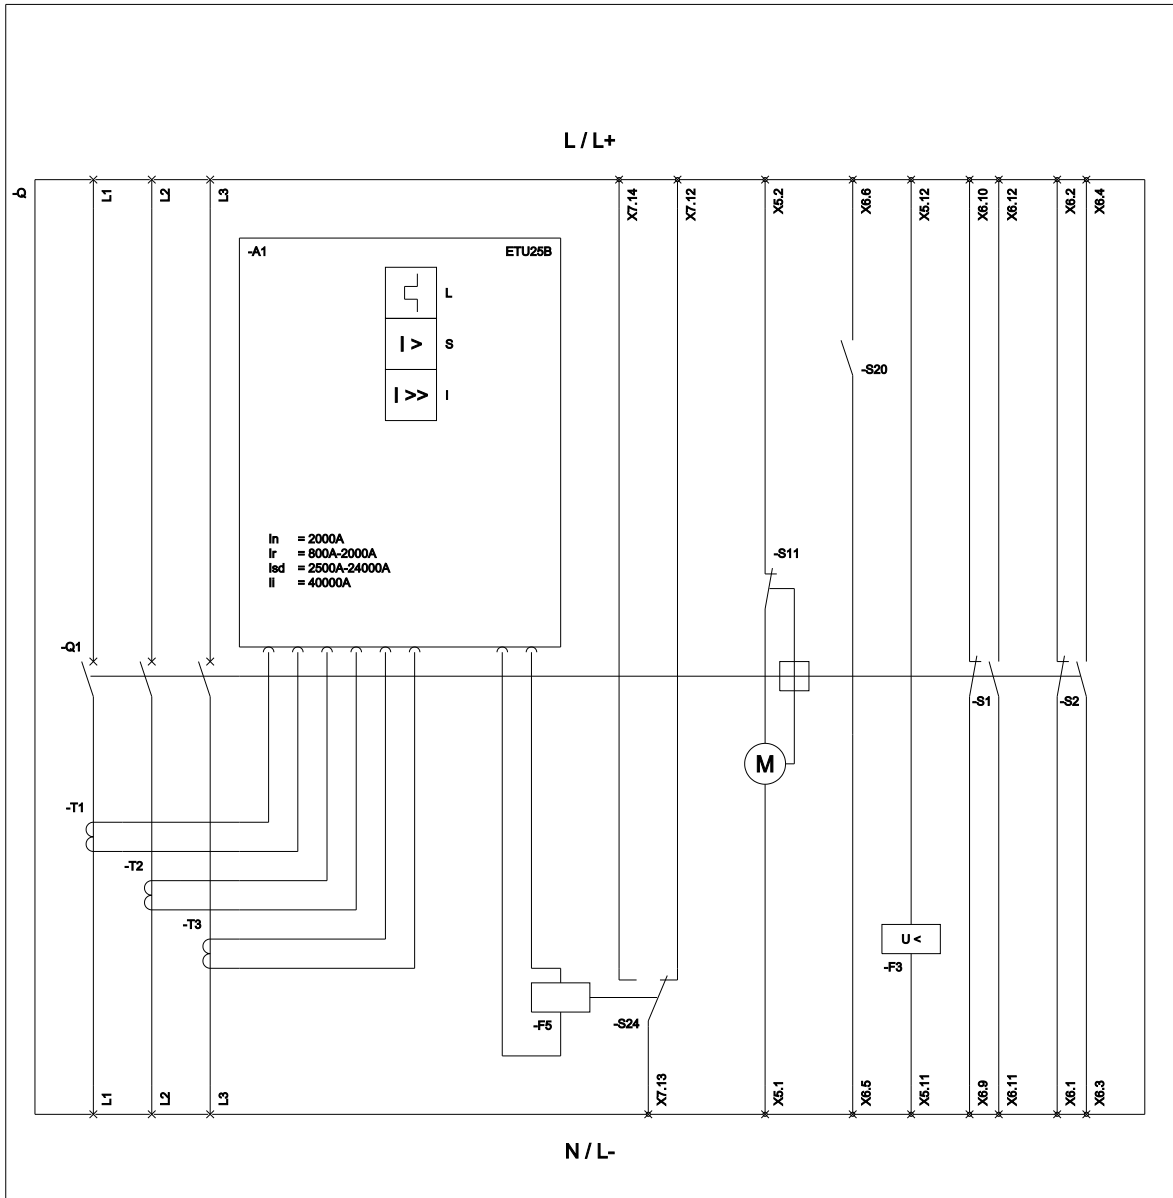

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert); I (Instantaneous / Kurzschlusschutz, unverzögert);  
 S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorstopp-Schalter, wenn Feder gespannt); F3 (Undervoltage release / Unterspannungsalöser);  
 F5 (Magnet for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfschalter); S20 (Ready to close signalling switch / Einschaltbereitschaftsmeldeschalter);  
 S24 (1st trip signalling switch K07 (Reset position) / Erster Auslösestmeldeschalter K07 (Reset Position));

last modified:

4/17/2024

