

withdrawable circuit breaker with guide frame 3-pole, size I, IEC In=630A to 690V, AC50/60Hz Icu=55kA at 500V w. connection flange Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 4NO+4NC C22= Ready indicator C26= Auxiliary switching function 1 Auxiliary release not possible with option F02 K07= Tripped signaling contact, 1 CO not possible with option F02 R15= Position signaling switch, withdrawable part 3 changeover contacts R21= Shutter 2-part can be locked with padlock

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1106-2CB38-4GA4-Z C22+C26+K07+R15+R21>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1106-2CB38-4GA4-Z C22+C26+K07+R15+R21>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1106-2CB38-4GA4-Z C22+C26+K07+R15+R21


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

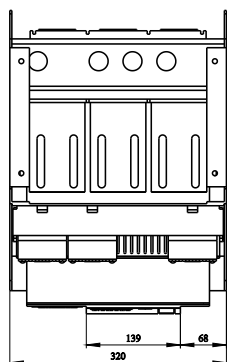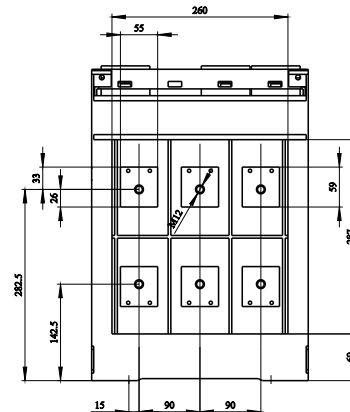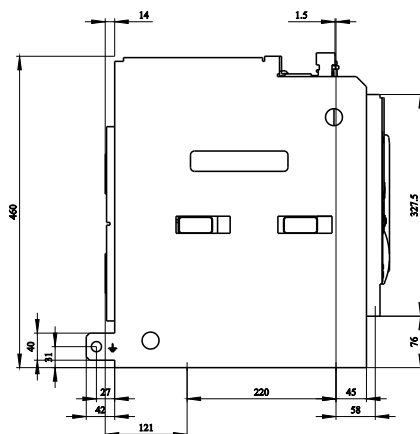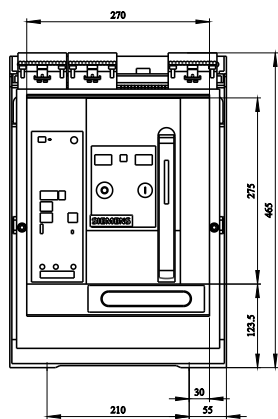

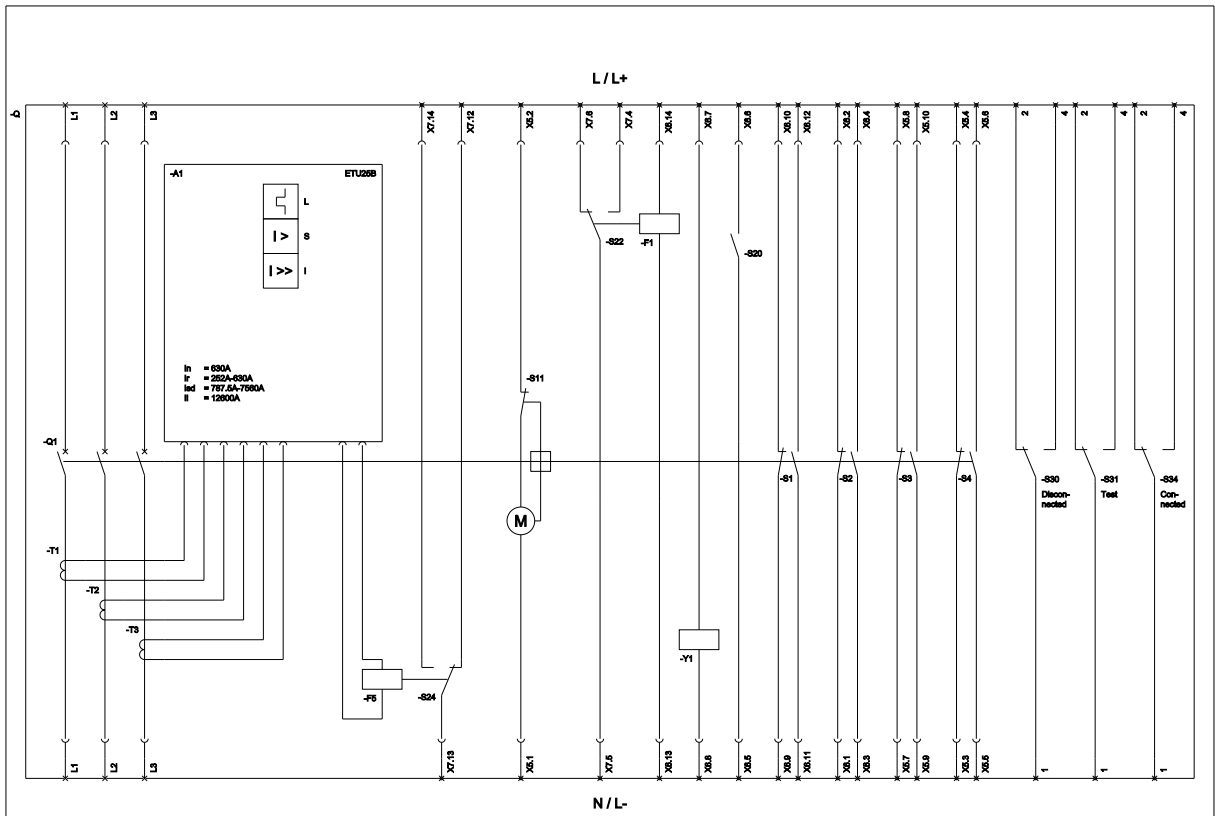

L (Long Time Delay / Durchlaufzeit); S (Short Time Delay / Kurzschlusszeit, Inaktivezeit); 1 (Automatic / Kurzschlusszeit, unzeitig); S11 (Internal motor shutdown switch, if cycling is required / Interne Motorschaltvorrichtung, wenn Puls gegeben);
 F1 (1st auxiliary release / Erste Hilfsfunktion); S22 (Signalling contact at the 1st auxiliary release / Meldekontakt am ersten Hilfskontakt); F1 (Signal for stop / Anhaltenzeit); S1 - S4 (Auxiliary switch / Hilfsfunktion);
 S24 (Ready to start signalling switch / Startbereitschaftsmeldekontakt); S24 (1st stop signalling switch / Start position) / Start-Angebotsmeldekontakt S27 (Start Position); T1 (Choking coil / Strombegrenzung);

last modified:

2/26/2021

