

# AFM60B-BDTK008192

AFS/AFM60 SSI

**ABSOLUTE ENCODERS** 





## Ordering information

Туре	Part no.
AFM60B-BDTK008192	1079726

Illustration may differ

Other models and accessories → www.sick.com/AFS\_AFM60\_SSI



## Detailed technical data

#### Performance

Max. resolution (number of steps per revolution x number of revolutions)	13 bit x 12 bit (8,192 x 4,096)
Error limits G	0.05° <sup>1)</sup>
Repeatability standard deviation $\sigma_{\text{r}}$	0.002° <sup>2)</sup>

<sup>1)</sup> In accordance with DIN ISO 1319-1, position of the upper and lower error limit depends on the installation situation, specified value refers to a symmetrical position, i.e. deviation in upper and lower direction is the same.

## Interfaces

Communication interface	SSI
Communication Interface detail	SSI + incremental TTL
Initialization time	50 ms <sup>1)</sup>
Position forming time	< 1 µs
SSI	
Code type	Gray
Code sequence parameter adjustable	CW/CCW (V/R) parameter adjustable
Clock frequency	≤ 2 MHz <sup>2)</sup>
Set (electronic adjustment)	H-active (L = $0 - 3 \text{ V}$ , H = $4.0 - U_s \text{ V}$ )
CW/CCW (counting sequence when turning)	L-active (L = 0 - 1,5 V, H = 2,0 - Us V)
Incremental	
Pulses per revolution	1/4 of number of SSI steps per revolution
Output frequency	≤ 600 kHz
Load current	≤ 30 mA
Sin/Cos	
Load resistance	≥ 120 Ω

 $<sup>^{1)}</sup>$  Valid positional data can be read once this time has elapsed.

 $<sup>^{2)}</sup>$  In accordance with DIN ISO 55350-13; 68.3% of the measured values are inside the specified area.

 $<sup>^{2)}</sup>$  Minimum, LOW level (Clock +): 250 ns.

## Electrical data

Connection type	Cable, 12-wire, radial, 1.5 m
Supply voltage	4.5 32 V DC
Power consumption	≤ 0.7 W (without load)
Reverse polarity protection	✓
MTTFd: mean time to dangerous failure	250 years (EN ISO 13849-1) <sup>1)</sup>

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

## Mechanical data

Mechanical design	Blind hollow shaft
Shaft diameter	10 mm
Weight	0.2 kg <sup>1)</sup>
Shaft material	Stainless steel
Flange material	Aluminum
Housing material	Aluminum die cast
Start up torque	< 0.8 Ncm <sup>2) 2)</sup>
Operating torque	< 0.6 Ncm <sup>2) 2)</sup>
Permissible movement static	± 0.5 mm (axial) ± 0.3 mm (radial)
Permissible movement dynamic	± 0.2 mm (axial) ± 0.1 mm (radial)
Moment of inertia of the rotor	40 gcm <sup>2</sup>
Bearing lifetime	3.0 x 10^9 revolutions
Angular acceleration	+ 500,000 rad/s <sup>2</sup>
Operating speed	≤ 6,000 min <sup>-1 3)</sup>

<sup>&</sup>lt;sup>1)</sup> Relates to devices with male connector.

## Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-3 <sup>1)</sup>
Enclosure rating	IP65, shaft side (according to IEC 60529) IP67, housing side (according to IEC 60529) <sup>2)</sup>
Permissible relative humidity	90 % (condensation of the optical scanning not permitted)
Operating temperature range	-40 °C +100 °C <sup>3)</sup>
Storage temperature range	-40 °C +100 °C, without package
Resistance to shocks	70 g, 6 ms (according to EN 60068-2-27)
Resistance to vibration	30 g, 10 Hz 2,000 Hz (according to EN 60068-2-6)

 $<sup>^{1)}</sup>$  EMC according to the standards quoted is achieved if shielded cables are used.

## Classifications

ECI@ss 5.0	27270502
------------	----------

<sup>&</sup>lt;sup>2)</sup> At 20 °C.


 $<sup>^{</sup>m 3)}$  Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

 $<sup>^{2)}\,\</sup>mbox{For devices}$  with male connector: With mating connector mounted.

 $<sup>^{3)}</sup>$  Stationary position of the cable.

ECI@ss 5.1.4	27270502
ECI@ss 6.0	27270590
ECI@ss 6.2	27270590
ECI@ss 7.0	27270502
ECI@ss 8.0	27270502
ECI@ss 8.1	27270502
ECI@ss 9.0	27270502
ECI@ss 10.0	27270502
ECI@ss 11.0	27270502
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
UNSPSC 16.0901	41112113

## Dimensional drawing (Dimensions in mm (inch))

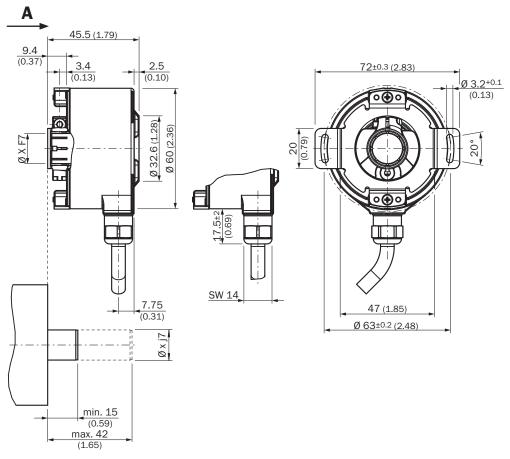

**Customer-side** 

## PIN assignment


M23 male connector, 12-pin and cable, 12-wire, SSI/Gray + incremental



View of M23 male device connector on encoder

PIN	Wire colors (cable connection)	Signal	Explanation
1	Red	U <sub>S</sub>	Operating voltage
2	Blue	GND	Ground connection
3	Yellow	Clock +	Interface signals
4	White	Data +	Interface signals
5	Orange	SET	Electronic adjustment
6	Brown	Data -	Interface signals
7	Violet	Clock -	Interface signals
8	Black	_B	Signal wire
9	Orange-black	V/R	Sequence in direction of rotation
10	Green	¯A	Signal wire
11	Gray	Α	Signal wire
12	Pink	В	Signal wire
		Screen	Screen connected to hous- ing on encoder side. Connect- ed to ground on control side.


## Maximum revolution range

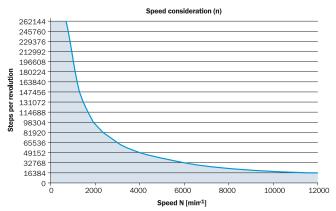

The maximum speed is also dependent on the shaft type.

#### **Diagrams**

## SSI data format singleturn



#### Bit 1-18: Position Bits

- · LSB: Least significant Bit
- . MSB: Most significant Bit

#### Bit 19-21: Error Bits

- ERRDIG: Failure message about speed. If this failure occurs during the position building procedure it will be indicated by the ERRDIG-Bit.
- ERRSI: Light source monitoring failure.
- ERRSYNC: Contamination of the disc or scanning system. During the determination of the position, an error has occurred since the last SSI transmission. The error bit will be deleted during the next data transmission.

#### The evaluation of the error bits has to be realized in the PLC.


The provided error bits don't have to be used by the PLC compulsorily.

#### **Example**

If the resolution of the absolute encoder is set on 13 bits, 16 bits are provided by the encoder: 13 data bits and 3 error bits. If the PLC is not able to evaluate the error bits, the PLC has to be set on a resolution of 13 bits. Then the error bits have to be masked out by the PLC.

#### SSI data format multiturn

#### 30 Bits




Bit 1-12: Position Bits multiturn

Bit 13-30: Position Bits singleturn

Bit 31-33: Error Bits

#### 27 Bits



Bit 1–12: Position Bits multiturn

Bit 13-27: Position Bits singleturn

Bit 28-30: Error Bits

#### **Error Bits**

- ERRDIG: Failure message about speed. If this failure occurs during the position building procedure it will be indicated by the ERRDIG-Bit.
- ERRSI: Light source monitoring failure.
- ERRSYNC: Contamination of the disc or scanning system. During the determination of the position, an error has occurred since the last SSI transmission. The error bit will be deleted during the next data transmission.

#### The evaluation of the error bits has to be realized in the PLC.

The provided error bits don't have to be used by the PLC compulsorily. The multiturn resolution is fixed on 12 bits.

## Example


If the resolution of the absolute encoder is set on 27 bits, 30 bits are provided by the encoder: 27 data bits and 3 error bits. If the PLC is not able to evaluate the error bits, the PLC has to be set on a resolution of 27 bits. Then the error bits have to be masked out by the PLC.

## Electrical interfaces sine 0.5 $V_{pp}$

Power supply	Output
4.5 5.5 V	Sine 0.5 V

Signal **before** differential generation at load 120  $\Omega$  at U  $_{\rm S}$  = 5 V


Signal diagram for clockwise rotation of the shaft looking in direction "A" (shaft)

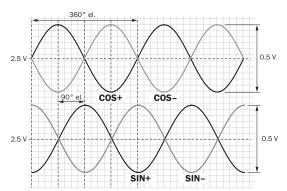

Interface signals Sin, Sin, Cos, Cos	Signal before differential generation at load 120 $\boldsymbol{\Omega}$	Signal offset
Analog differential	0.5 V <sub>pp</sub> ± 20 %	2.5 V ± 10 %


Signal after differential generation at load 120  $\Omega$  at U<sub>s</sub> = 5 V

Signal diagram for clockwise rotation of the shaft looking in direction "A" (shaft)

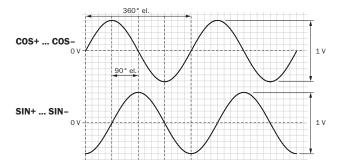

## **Electrical interfaces HTL/TTL**

Incremental pulse diagram for clockwise rotation of the shaft looking in direction "A", see dimensional drawing



## AFM60B-BDTK008192 | AFS/AFM60 SSI

ABSOLUTE ENCODERS

## Recommended accessories

Other models and accessories → www.sick.com/AFS\_AFM60\_SSI

	Brief description	Туре	Part no.
Plug connecto	ors and cables		
	Head A: male connector, M23, 12-pin, straight Head B: - Cable: HIPERFACE <sup>®</sup> , SSI, Incremental, RS-422, shielded	STE-2312-G	6027537
	Head A: male connector, M23, 12-pin, straight Head B: - Cable: HIPERFACE <sup>®</sup> , SSI, Incremental, shielded	STE-2312-G01	2077273
		STE-2312-GX	6028548

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

## **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

