



Flashlight element, with integrated LED, red, 230 V AC, Diameter 50 mm

General technical data			
product brand name	SIRIUS		
product designation	Repeated-flash light element		
design of the optical signal	blinklight		
type of voltage of the operating voltage	AC		
operating voltage			
• 1 at AC at 50 Hz rated value	230 V		
• 1 at AC at 60 Hz rated value	230 V		
relative positive tolerance of the operating voltage	10 %		
relative negative tolerance of the operating voltage	-10 %		
consumed current maximum	35 mA		
service life of LED	100 000 h		
material	PC		
color	red		
fastening method	Bayonet		
reference code			
• acc. to DIN EN 61346-2	P		
• acc. to IEC 81346-2	P		
Mechanical data			
outer diameter of the signal column element	50 mm		
Lamp			
product component light source	Yes		
type of light source	LED		
flashing frequency	1 Hz		
light intensity	0.98 cd		
light intensity	0.64 ... 1.51 cd		
Ambient conditions			
ambient temperature during operation	-20 ... +50 °C		
protection class IP	IP54		
height	67 mm		
width	52 mm		
Certificates/ approvals			
General Product Approval	EMC	Declaration of Conformity	other



[UK Declaration of Conformity](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4250-5BB>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4250-5BB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4250-5BB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4250-5BB&lang=en

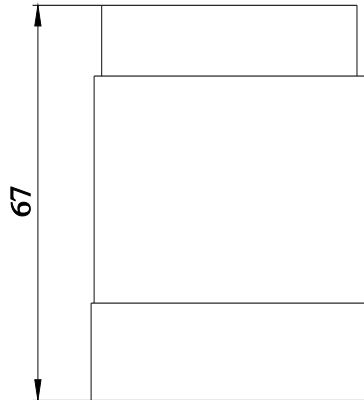

-P

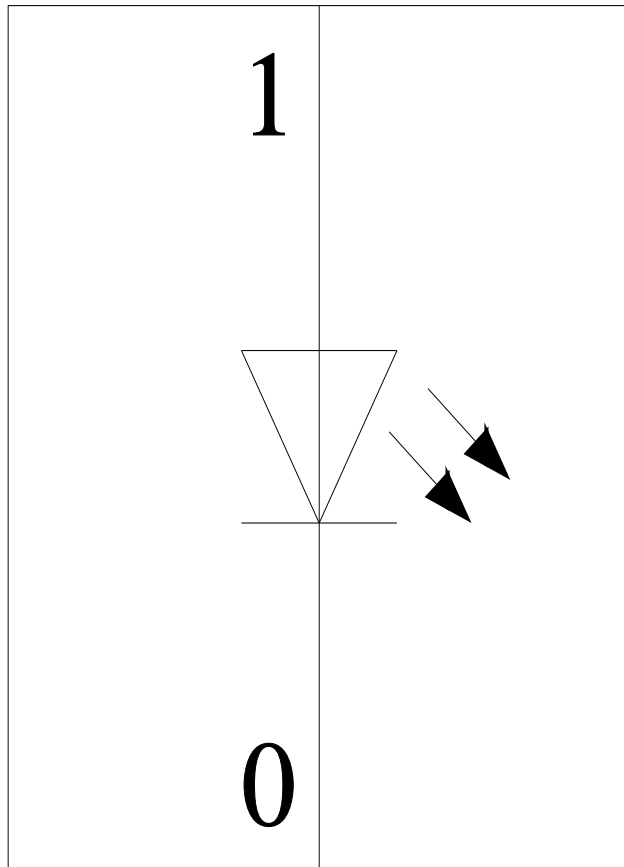

last modified:

12/21/2020 