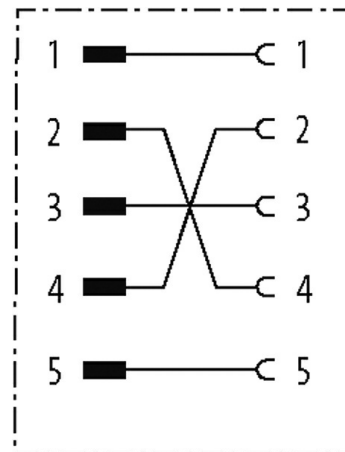
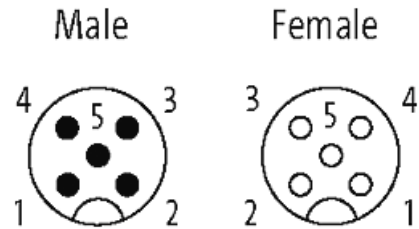
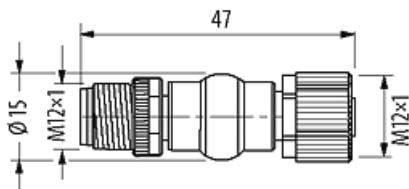


MSBL0-A-U BU.-ST.PIN 2AUF4/4AUF2 ADAPTER

Adapter
M12 – M12
5-pole

[Link to Product](#)**Illustration**

Product may differ from Image

Form

Form 333370

Technical Data

Operating voltage	max. 24 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Material	PUR

General data

Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879255646
eClass	27279218

Packaging unit

10