





**adaptor M12 male / M12 male**

Adapter  
 Male - male  
 M12 – M12, 5-pole  
 A-coded  
 Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

**Link to Product****Illustration**

Male

Male

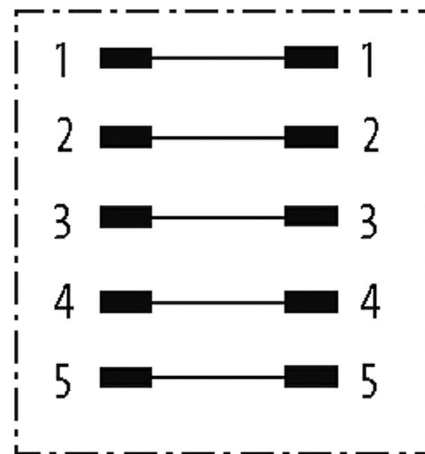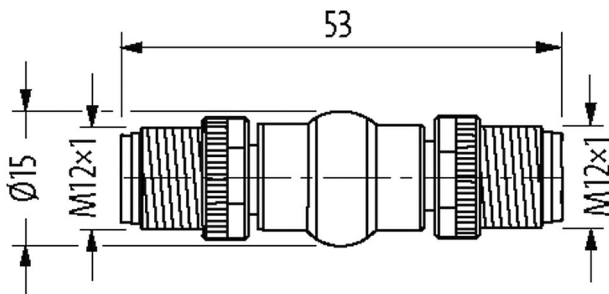

Product may differ from Image

**Form**

Form 40057

**Technical Data**

Operating voltage	max. 125 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
No. of poles	5
Material group	IEC 60664-1, category I
Coding	A-coded
LED display	no
Locking of ports	Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR

Locking material Zinc die casting, matte nickel plated

**General data**

Standards	DIN EN 61076-2-101 (M12)
Mounting method	inserted, tightened
Material (contact)	Copper alloy
Material (contact surface)	Au
Pollution Degree	3
Temperature range	-25...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879688529
eClass	27279218
Packaging unit	1