

**MVP12, 6XM12, 5POLE, PLUGGABLE CABLE**

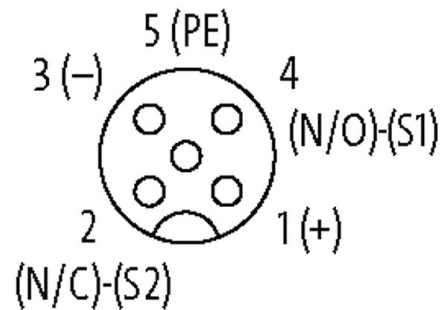
15.0m PUR/PVC 12x0,34+3x0,75

6-way, 5-pole

PUR/PVC

15.0 m

with LED for digital PNP-signals 24 V DC

[Link to Product](#)**Illustration****M12 Females 5-pole**

Product may differ from Image



UL

UL

**Technical Data**

Operating voltage	24 V DC $\pm 25\%$
Operating current per contact	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	PBT
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 8 A

**General data**

Temperature range	-20...+80 °C
Dimensions HxWxD	125x50.2x17 mm

**Cables**

No./diameter of wires	12x 0.34 + 3x 0.75 mm <sup>2</sup>
Wire isolation	PVC (yebr, rd, grpk, wh, rdbl, gn, whgn, ye, brgn, gr, whye, pk, br, gnye, bl)
C-track properties	2 Mio.
Outer Ø	9.8 mm $\pm 5\%$
Cable number	388
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
Bend radius (fixed)	10x outer Ø

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC
<b>Commercial data</b>	
country of origin	CZ
customs tariff number	85444290
EAN	4048879064477
eClass	27279219
Packaging unit	1.000