

ADAPTOR M12 LITE MALE/ M12 LITE FEMALE 4 POLE

Special assignment

Adapter

Male - female




M12 – M12, 4-pole

7005 - plastic hexagonal screw (M12 Lite)

[Link to Product](#)**Illustration**

Male

Female

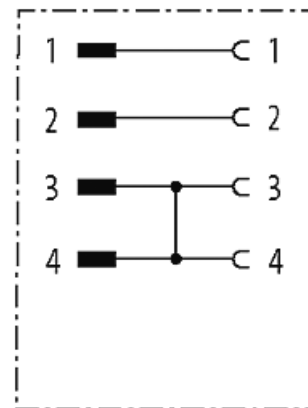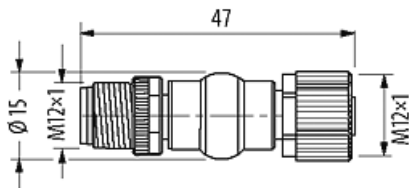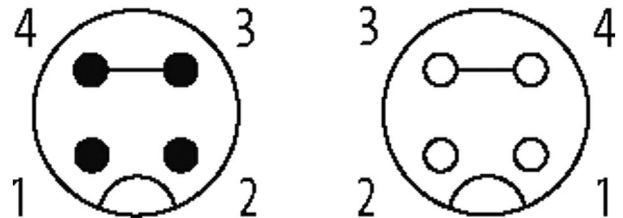

Product may differ from Image

**Form**

Form 15061

Technical Data

Operating voltage	max. 250 V AC/DC
Rated surge voltage	2.5 kV
Operating voltage (only UL listed)	max. 30 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)
Material	PUR
Locking material	PA

General data

Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879446839
eClass	27279218
Packaging unit	1