

T coupler 7/8" male / 2x 7/8" female 3p

T-coupler

Female straight – female/male straight

7/8" – 7/8", 3-pole




Parallel circuit

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

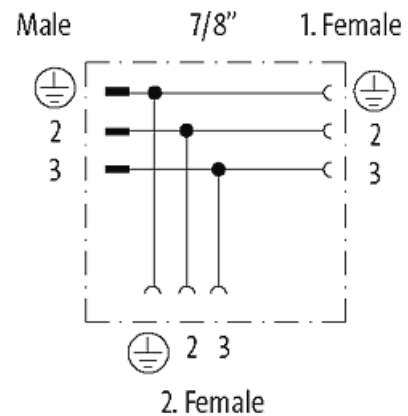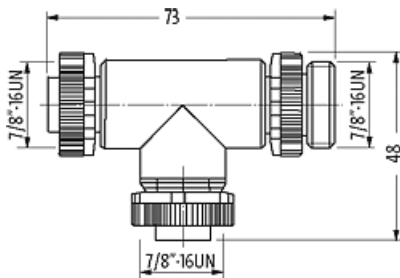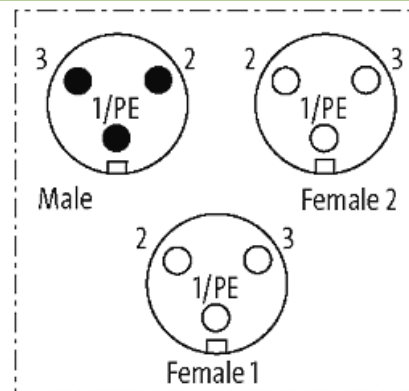

Product may differ from Image

Form

Form 50071

Technical Data

Operating voltage	max. 250 V AC/DC
Rated surge voltage	4.0 kV
Operating current per contact	max. 10 A
Material group	IEC 60664-1, category II
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Compression gland	7/8" (SW24)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Material	PA

suitable for corrugated tube (internal Ø)	without
---	---------

Housing	PA
---------	----

General data

Pollution Degree	3
------------------	---

Temperature range	-30...+90 °C
-------------------	--------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879631426
-----	---------------

eClass	27143423
--------	----------

Packaging unit	1
----------------	---