


**Modlink MSDD-set: Frame 4000-68112-0000000,**  
insert 4000-68000-0160000

[Link to Product](#)

Illustration

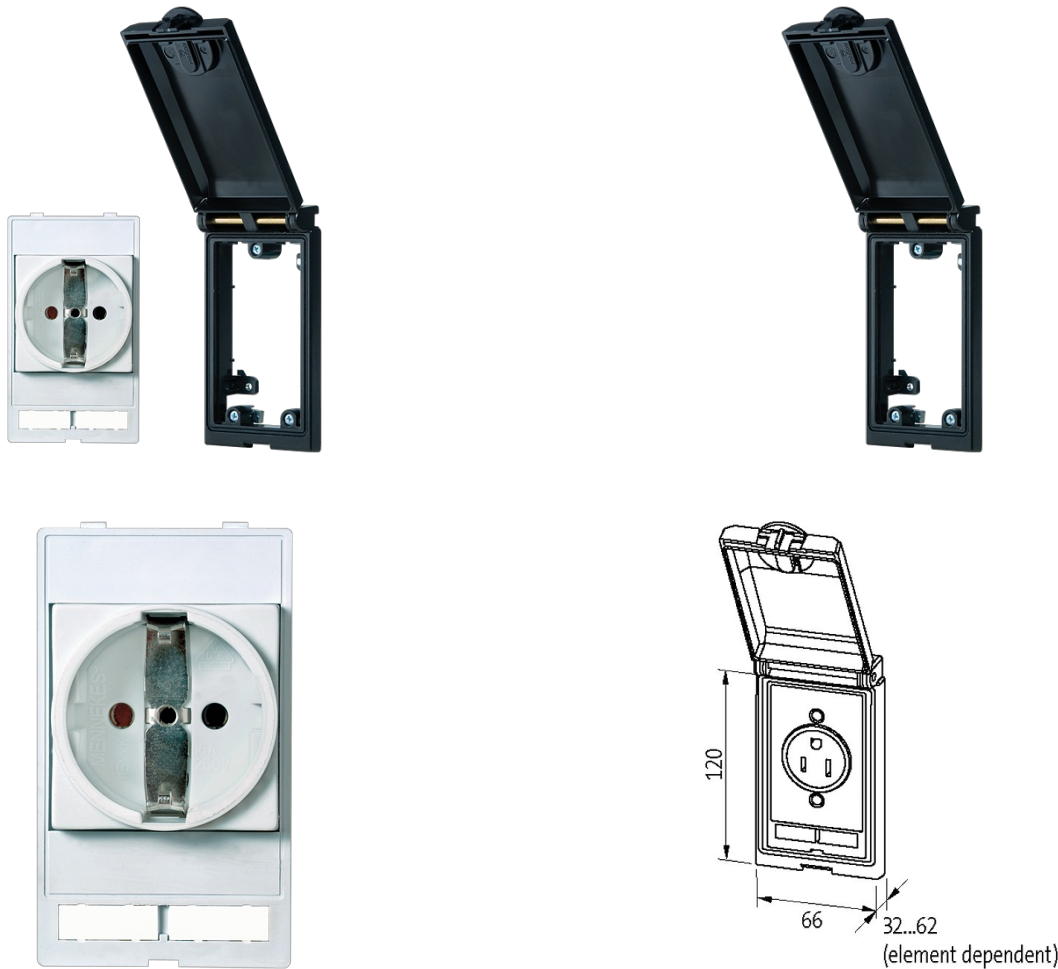

Product may differ from Image

Frame	
suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Housing	Zinc die-casting, KTL coated
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Germany (VDE)	
Operating voltage	230 V AC
Operating current	16 A
No. of poles	2 + PE
Connection	Spring clamp terminals: max. 2× 2.5 mm² (AWG 14)
Commercial data	
country of origin	CZ
customs tariff number	85389099
EAN	4048879036580
eClass	27189217

Packaging unit

1