

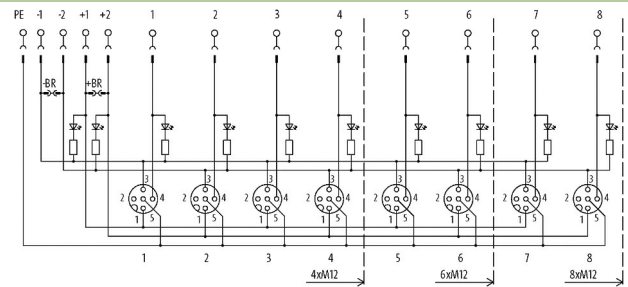


MVP12, 4XM12, MOSA, CON. CAP

With potent. sep.

pluggable connection cap
 Potential separation as option
 with LED for digital PNP-signals 24 V DC
 quick connection elements included
 Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.

Link to Product**Illustration**

for 2 signals per port

Product may differ from Image

Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Cap nut
Connection cross section	0.25...0.5 mm ²
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2x 8 A

General data

Temperature range	-20...+80 °C
-------------------	--------------

Dimensions H×W×D 43×50.2×122 mm

Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED (green): Power / LED (yellow): (S1/S2)	

Commercial data

country of origin	CZ
customs tariff number	85369010
EAN	4048879057509
eClass	27279219
Packaging unit	1.000