

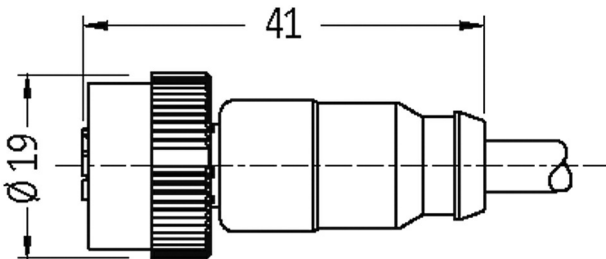
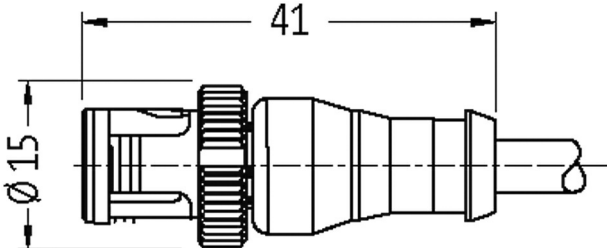

MQ12 male 0° / MQ12 female 0°

PUR 4x0.5 bk spiral cable 1,2m

Male straight – female straight
MQ12 – MQ12, 4-pole
Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


[Link to Product](#)

Illustration




1	■	brown (+)	↔	C 1
2	■	white (N/C)	↔	C 2
4	■	yellow (N/O)	↔	C 4
3	■	green (-)	↔	C 3

Male



Female



Product may differ from Image

Technical Data	
Operating voltage	max. 250 V AC/DC
Rated surge voltage	2.5 kV
Operating current per contact	max. 4 A
Locking of ports	Quick connection, 1/4 turn
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
General data	

Temperature range -25...+85 °C, depending on cable quality

Cables

Diameter (core)	4× 0.5 mm ²
Material (wire isolation)	TPE-E
Color/numbering of wires	wh, br, gn, ye
Material (jacket)	PUR
Outer-Ø (jacket)	5.3 mm ±5%
Color (jacket)	black
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	#-30...+80 °C

Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879634847
eClass	27279218
Packaging unit	1