

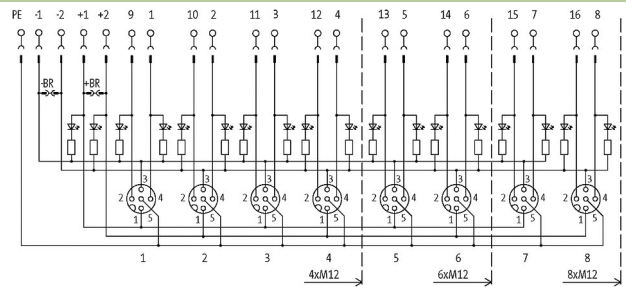


MVP12, 6XM12, MOSA, CON. CAP

With potent. sep.

pluggable connection cap
 Potential separation as option
 with LED for digital PNP-signals 24 V DC
 quick connection elements included
 Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.

Link to Product**Illustration**

for 2 signals per port

Product may differ from Image

Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Cap nut
Connection cross section	0.25...0.5 mm ²
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

General data

Temperature range	-20...+80 °C
Dimensions H×W×D	43×50.2×145 mm

Contact Layout

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1/S2)

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879057493
eClass	27279219
Packaging unit	1.000