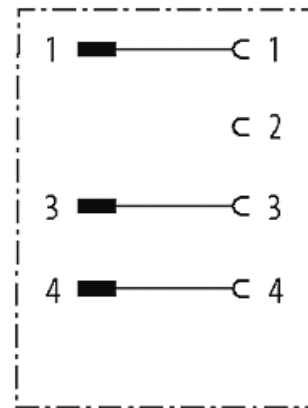
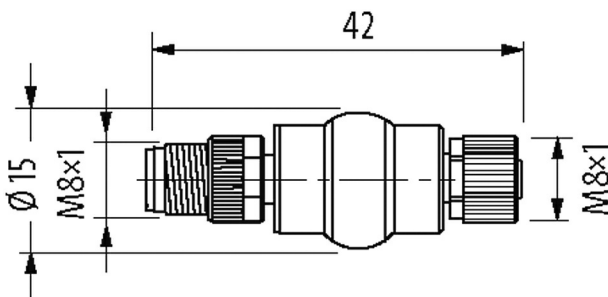
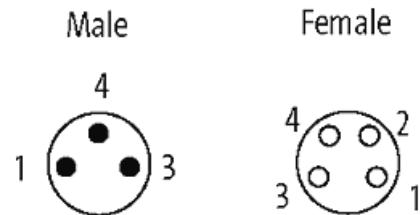


ADAPTOR M8 MALE / M8 FEMALE CONF. 1,3,4

Adapter
Male - female
M8 – M8, 3/4-pole

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form 88511

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M8 (SW9)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Material	PUR

General data

Test isolation voltage	0.8 kV eff/rms
------------------------	----------------

Pollution Degree	3
------------------	---

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879118538
-----	---------------

eClass	27143423
--------	----------

Packaging unit	1
----------------	---