

MVP12, 6XM12, 5POLE, PLUGGABLE CABLE

10.0m PUR/PVC 12x0,34+5x0,75

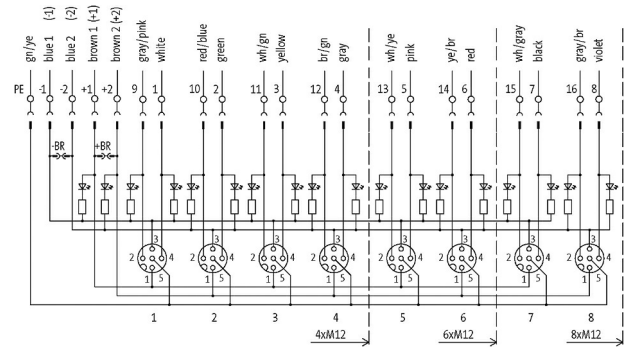
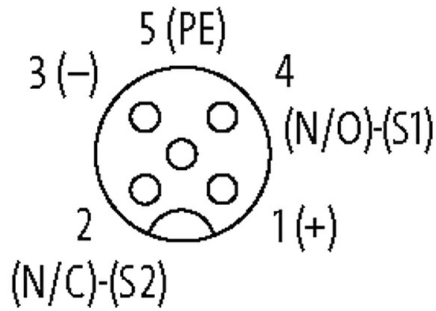
6-way, 5-pole

PUR/PVC

10.0 m

potentially separated

with LED for digital PNP-signals 24 V DC

[Link to Product](#)**Illustration****M12 Females 5-pole**

Product may differ from Image



UL

UL

Technical Data

Operating voltage	24 V DC $\pm 25\%$
Operating current per contact	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	PBT
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2x 8 A

General data

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Temperature range	-20...+80 °C
-------------------	--------------

Dimensions HxWxD	125x50.2x17 mm
------------------	----------------

Cables

No./diameter of wires	16x 0.34 + 2x 0.75 mm ²
-----------------------	------------------------------------

C-track properties	5 Mio.
--------------------	--------

Outer Ø	10.4 mm ±5%
---------	-------------

Cable number	396
--------------	-----

Jacket Color	gray
--------------	------

Temperature range (fixed)	-40...+80 °C
---------------------------	--------------

Temperature range (mobile)	-5...+60 °C
----------------------------	-------------

Bend radius (fixed)	5x outer Ø
---------------------	------------

Bend radius (moving)	10x outer Ø
----------------------	-------------

Material (jacket)	PUR (UL/CSA)
-------------------	--------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85444290
-----------------------	----------

EAN	4048879064255
-----	---------------

eClass	27279219
--------	----------

Packaging unit	1.000
----------------	-------