



Figure similar

SIRIUS soft starter 200-480 V 171 A, 110-250 V AC Spring-loaded terminals Thermistor input

product brand name
product category
product designation
product type designation
manufacturer's article number

- of standard HMI module usable
- of high feature HMI module usable
- of communication module PROFINET standard usable
- of communication module PROFIBUS usable
- of communication module Modbus TCP usable
- of communication module Modbus RTU usable
- of communication module Ethernet/IP
- of circuit breaker usable at 400 V
- of circuit breaker usable at 500 V
- of the gG fuse usable up to 690 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V
- of line contactor usable up to 480 V
- of line contactor usable up to 690 V

SIRIUS
 Hybrid switching devices
 Soft starter
 3RW50

- [3RW5980-OHS01](#)
- [3RW5980-OHF00](#)
- [3RW5980-OCS00](#)

- [3RW5980-0CP00](#)
- [3RW5980-0CT00](#)
- [3RW5980-0CR00](#)
- [3RW5980-0CE00](#)

- [3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA](#)
- [3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA](#)
- [3NA3244-6; Type of coordination 1, Iq = 65 kA](#)
- [3NE1 230-0; Type of coordination 2, Iq = 65 kA](#)

[3NE3 335; Type of coordination 2, Iq = 65 kA](#)

- [3RT1056](#)
- [3RT1064](#)

General technical data

starting voltage [%]	30 ... 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 ... 20 s
ramp-down time of soft starter	0 ... 20 s
current limiting value [%] adjustable	130 ... 700 %
certificate of suitability	
• CE marking	Yes
• UL approval	Yes
• CSA approval	Yes
product component	
• HMI-High Feature	No
• is supported HMI-Standard	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
• for main current circuit	100 ms

<ul style="list-style-type: none"> • for control circuit 	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul style="list-style-type: none"> • between main and auxiliary circuit 	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	09/23/2019
product function	
<ul style="list-style-type: none"> • ramp-up (soft starting) • ramp-down (soft stop) • Soft Torque • adjustable current limitation • pump ramp down • intrinsic device protection • motor overload protection 	Yes Yes Yes Yes Yes Yes
<ul style="list-style-type: none"> • evaluation of thermistor motor protection • auto-RESET • manual RESET • remote reset • communication function • operating measured value display • error logbook • via software parameterizable • via software configurable • PROFenergy 	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes; By turning off the control supply voltage Yes Yes; Only in conjunction with special accessories Yes; Only in conjunction with special accessories
<ul style="list-style-type: none"> • voltage ramp • torque control • analog output 	No Yes Yes; in connection with the PROFINET Standard communication module Yes No No

Power Electronics

operational current	
<ul style="list-style-type: none"> • at 40 °C rated value • at 50 °C rated value • at 60 °C rated value 	171 A 153 A 141 A
operating voltage	
<ul style="list-style-type: none"> • rated value 	200 ... 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
<ul style="list-style-type: none"> • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value 	45 kW 90 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
<ul style="list-style-type: none"> • at rotary coding switch on switch position 1 • at rotary coding switch on switch position 2 • at rotary coding switch on switch position 3 • at rotary coding switch on switch position 4 • at rotary coding switch on switch position 5 • at rotary coding switch on switch position 6 • at rotary coding switch on switch position 7 • at rotary coding switch on switch position 8 • at rotary coding switch on switch position 9 • at rotary coding switch on switch position 10 	81 A 87 A 93 A 99 A 105 A 111 A 117 A 123 A 129 A 135 A

<ul style="list-style-type: none"> • at rotary coding switch on switch position 11 • at rotary coding switch on switch position 12 • at rotary coding switch on switch position 13 • at rotary coding switch on switch position 14 • at rotary coding switch on switch position 15 • at rotary coding switch on switch position 16 • minimum 	141 A
minimum load [%]	147 A
power loss [W] for rated value of the current at AC	153 A
<ul style="list-style-type: none"> • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup 	159 A
power loss [W] at AC at current limitation 350 %	165 A
<ul style="list-style-type: none"> • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup 	171 A
type of the motor protection	81 A
	15 %; Relative to smallest settable le
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	110 ... 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	110 ... 250 V
relative positive tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	10 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	-15 %
control supply voltage frequency	10 %
relative negative tolerance of the control supply voltage frequency	50 ... 60 Hz
relative positive tolerance of the control supply voltage frequency	-10 %
control supply current in standby mode rated value	10 %
holding current in bypass operation rated value	30 mA
inrush current by closing the bypass contacts maximum	80 mA
inrush current peak at application of control supply voltage maximum	2.5 A
duration of inrush current peak at application of control supply voltage	12.2 A
design of the overvoltage protection	2.2 ms
design of short-circuit protection for control circuit	Varistor
	4 A gG fuse (I _{cu} =1 kA), 6 A quick-acting fuse (I _{cu} =1 kA), C1 miniature circuit breaker (I _{cu} = 600 A), C6 miniature circuit breaker (I _{cu} = 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
<ul style="list-style-type: none"> • not parameterizable 	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	0
switching capacity current of the relay outputs	
<ul style="list-style-type: none"> • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value 	3 A
	1 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	198 mm
width	120 mm
depth	249 mm
required spacing with side-by-side mounting	
<ul style="list-style-type: none"> • forwards 	10 mm

- backwards
- upwards
- downwards
- at the side

0 mm
100 mm
75 mm
5 mm
5.2 kg

weight without packaging

Connections/ Terminals

type of electrical connection

- for main current circuit
- for control circuit

busbar connection
spring-loaded terminals
25 mm

width of connection bar maximum

wire length for thermistor connection

- with conductor cross-section = 0.5 mm² maximum
- with conductor cross-section = 1.5 mm² maximum
- with conductor cross-section = 2.5 mm² maximum

50 m
150 m
250 m

type of connectable conductor cross-sections

- for main contacts for box terminal using the front clamping point solid
- for main contacts for box terminal using the front clamping point finely stranded with core end processing
- for main contacts for box terminal using the front clamping point finely stranded without core end processing
- for main contacts for box terminal using the front clamping point stranded
- for main contacts for box terminal using the back clamping point solid
- at AWG cables for main contacts for box terminal using the back clamping point
- for main contacts for box terminal using both clamping points solid
- for main contacts for box terminal using both clamping points finely stranded with core end processing
- for main contacts for box terminal using both clamping points finely stranded without core end processing
- for main contacts for box terminal using both clamping points stranded
- for main contacts for box terminal using the back clamping point finely stranded with core end processing
- for main contacts for box terminal using the back clamping point finely stranded without core end processing
- for main contacts for box terminal using the back clamping point stranded

16 ... 120 mm²
16 ... 120 mm²
10 ... 120 mm²
16 ... 70 mm²
16 ... 120 mm²
6 ... 250 kcmil
max. 1x 95 mm², 1x 120 mm²
max. 1x 95 mm², 1x 120 mm²
max. 1x 95 mm², 1x 120 mm²
max. 2x 120 mm²
16 ... 120 mm²
10 ... 120 mm²
16 ... 120 mm²

type of connectable conductor cross-sections

- at AWG cables for main current circuit solid
- for DIN cable lug for main contacts stranded
- for DIN cable lug for main contacts finely stranded

4 ... 250 kcmil
16 ... 95 mm²
25 ... 120 mm²

type of connectable conductor cross-sections

- for control circuit solid
- for control circuit finely stranded with core end processing
- at AWG cables for control circuit solid
- at AWG cables for control circuit finely stranded with core end processing

2x (0.25 ... 1.5 mm²)
2x (0.25 ... 1.5 mm²)
2x (24 ... 16)
2x (24 ... 16)

wire length

- between soft starter and motor maximum
- at the digital inputs at AC maximum

800 m
1 000 m

tightening torque

- for main contacts with screw-type terminals
- for auxiliary and control contacts with screw-type terminals

10 ... 14 N·m
0.8 ... 1.2 N·m

tightening torque [lbf·in]

- for main contacts with screw-type terminals
- for auxiliary and control contacts with screw-type

89 ... 124 lbf·in
7 ... 10.3 lbf·in

terminals

Ambient conditions

installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual
ambient temperature	
<ul style="list-style-type: none"> during operation 	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above
<ul style="list-style-type: none"> during storage and transport 	-40 ... +80 °C
environmental category	
<ul style="list-style-type: none"> during operation according to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul style="list-style-type: none"> during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul style="list-style-type: none"> during transport according to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A

Communication/ Protocol

communication module is supported	
<ul style="list-style-type: none"> PROFINET standard 	Yes
<ul style="list-style-type: none"> EtherNet/IP 	Yes
<ul style="list-style-type: none"> Modbus RTU 	Yes
<ul style="list-style-type: none"> Modbus TCP 	Yes
<ul style="list-style-type: none"> PROFIBUS 	Yes

UL/CSA ratings

manufacturer's article number	
<ul style="list-style-type: none"> of circuit breaker <ul style="list-style-type: none"> — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V according to UL of the fuse <ul style="list-style-type: none"> — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL 	<p>Siemens type: 3VA5225, max. 250 A; Iq = 10 kA</p> <p>Siemens type: 3VA52, max. 250 A; Iq max = 65 kA</p> <p>Type: Class RK5 / K5, max. 400 A; Iq = 10 kA</p> <p>Type: Class J, max. 350 A; Iq = 100 kA</p>
operating power [hp] for 3-phase motors	
<ul style="list-style-type: none"> at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value 	<p>50 hp</p> <p>50 hp</p> <p>100 hp</p>

Safety related data

protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover

ATEX

certificate of suitability	
<ul style="list-style-type: none"> ATEX IECEx UKEX 	<p>Yes</p> <p>Yes</p> <p>Yes</p>
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDAvg with low demand rate according to IEC 61508 relating to ATEX	0.09
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a





Certificates/ approvals

General Product Approval	For use in hazardous locations
---------------------------------	---------------------------------------



[Confirmation](#)



For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
 IECEX	Explosion Protection Certificate  EG-Konf.	 Type Test Certificates/Test Report	 ABS
Marine / Shipping	other		



LRS



PRS

[Confirmation](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5056-2TB14>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5056-2TB14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5056-2TB14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5056-2TB14&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current




<https://support.industry.siemens.com/cs/ww/en/ps/3RW5056-2TB14/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5056-2TB14&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

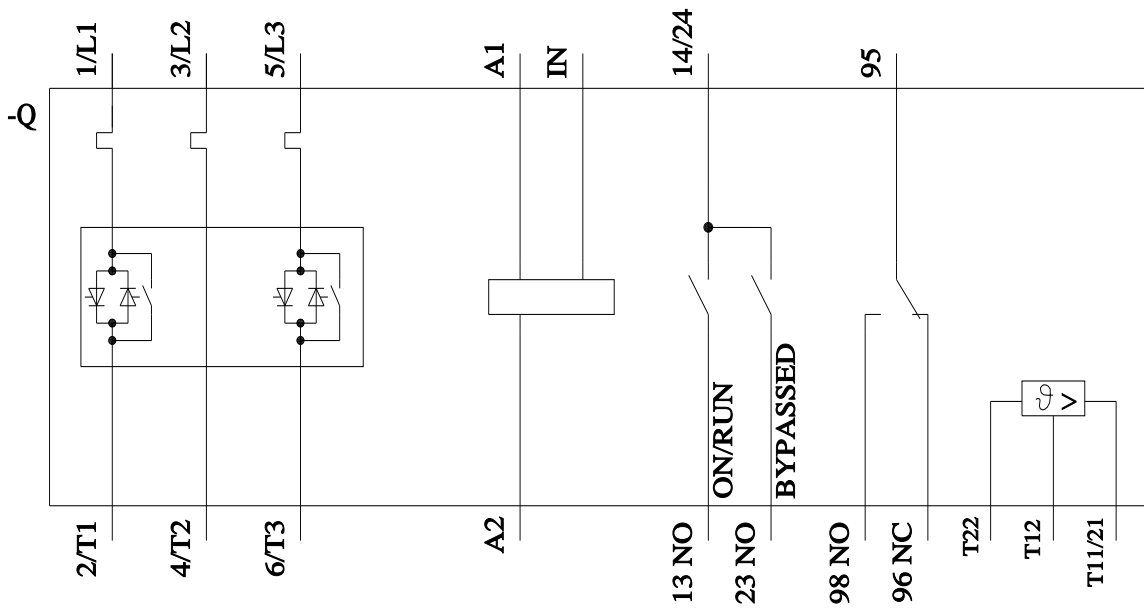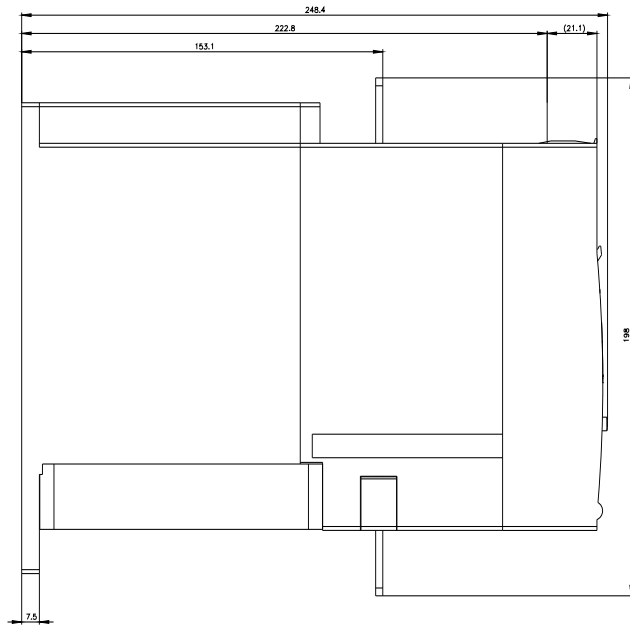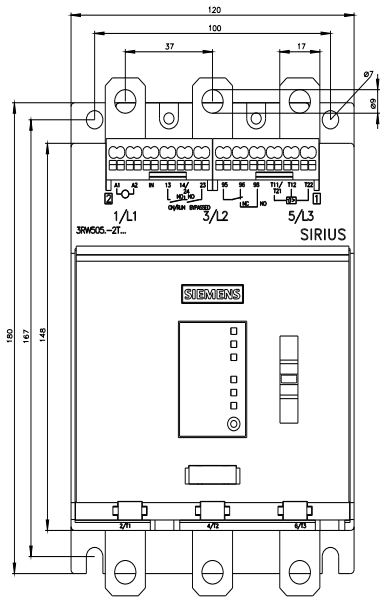

last modified:

1/14/2023 