

Withdrawable non-automatic air circuit breaker with slide-in module frame 4-pole, Size 2, IEC In=3200 A to 690 V, 50/60 Hz AC Icu=66 kA at 500 V with connecting flange without overcurrent release With manual operating mechanism with storage with mechanical request without 1st auxiliary release without 2nd auxiliary release 4NO+4NC M06= Motor drive, Drive motor AC 50/60 Hz 208-240 V or 220-250 V DC M36= Switch-on solenoid, overexcited 208-240 V AC/220-250 V DC M46= Opening solenoid, overexcited 208-240 V AC/220-250 V DC 5% on-load factor, not for continuous operation R15= Position signaling switch, withdrawable part 3 changeover contacts R21= Shutter 2-part can be locked with bracket lock R30= Locking device against opening of the Control cabinet door R55= Mutual mechanical interlock for switch with frame 2 m

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1232-2AA78-1AA4-Z M06+M36+M46+R15+R21+R30+R55>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1232-2AA78-1AA4-Z M06+M36+M46+R15+R21+R30+R55>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1232-2AA78-1AA4-Z M06+M36+M46+R15+R21+R30+R55


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

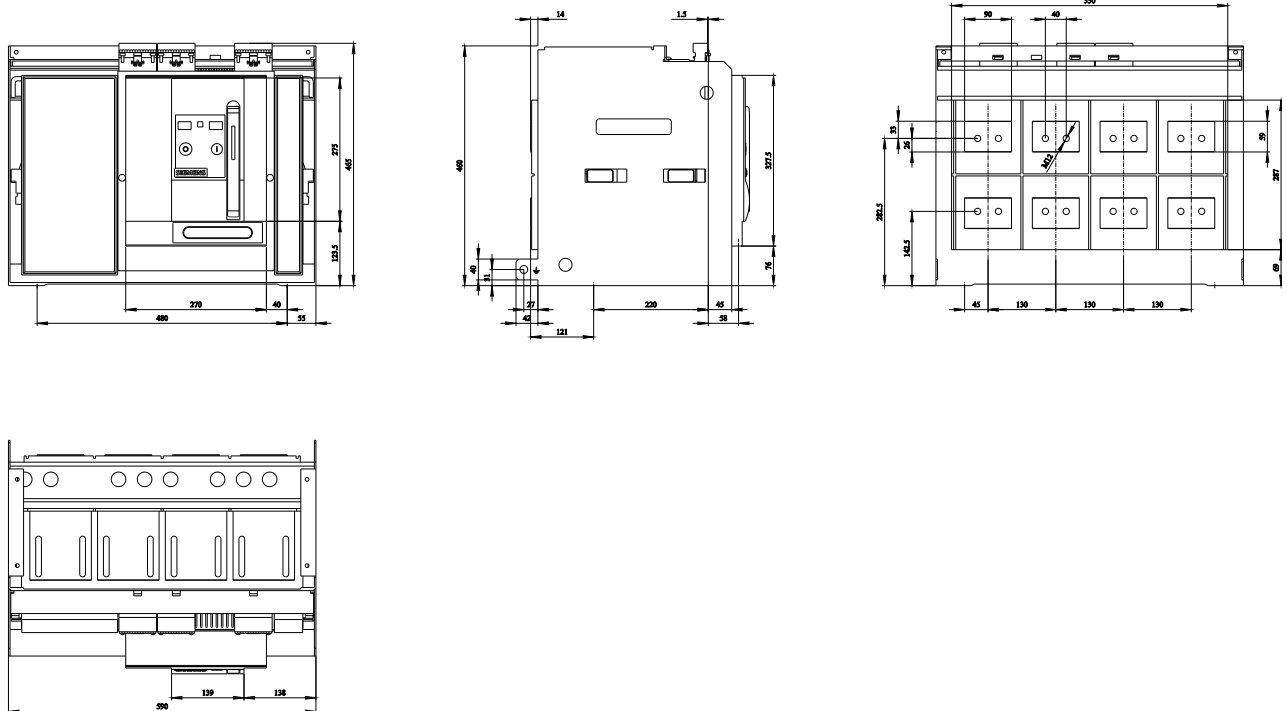

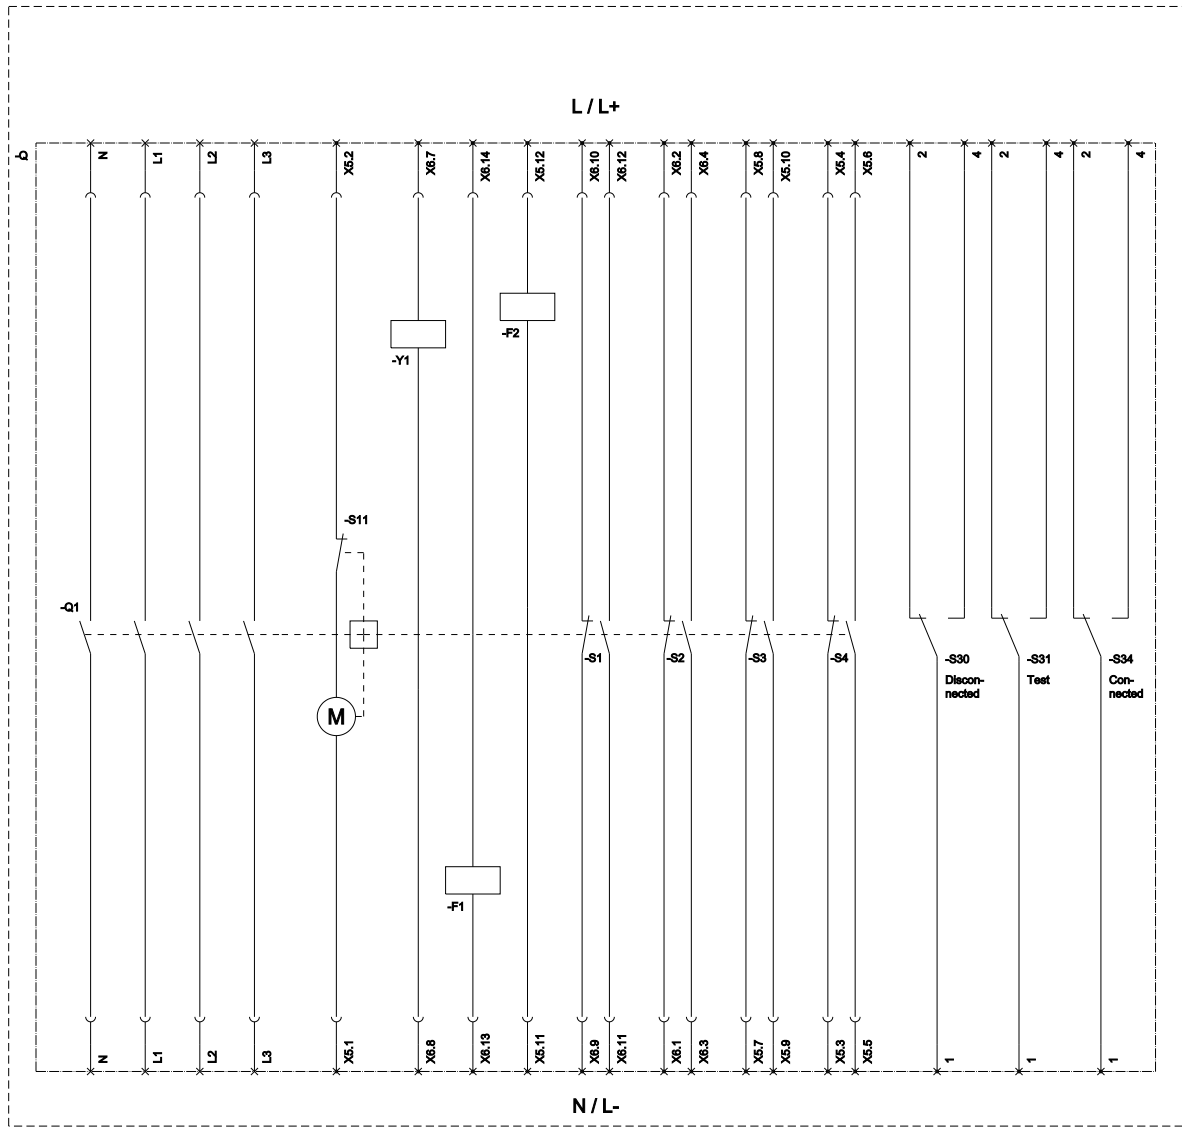

S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorabstellschalter, wenn Feder gespannt); F1 (1st auxiliary release / Erster Hilfskontakt); F2 (2nd auxiliary release / Zweiter Hilfskontakt); S1 - S8 (Auxiliary switch / Hilfschalter); Y1 (Closing coil / Einschaltmagnet);

last modified:

11/28/2024

