



activation & trip box TD300 incl. connecting cable 3VA - TD300 accessory for: 3VA6

Model	
product brand name	SETRON
product designation	Activation and trip box
accessories	Test device

General technical data	
mounting position	any
protection class IP	IP30

Mechanical Design	
number of circuit breakers / directly connectable	1
height	107 mm
width	76 mm
depth	25 mm
ambient temperature / during operation	
• minimum	-10 °C
• maximum	40 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	50 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	50 °C

Certificates	
General Product Approval	EMV
	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Dangerous goods	Environment
-------------------	-------	-----------------	-------------



[Confirmation](#)

[Miscellaneous](#)

[Miscellaneous](#)

[Transport Information](#)

[Environmental Confirmations](#)

**Environment**

[Environmental Con-](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9977-0MA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9977-0MA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9977-0MA10](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9977-0MA10)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

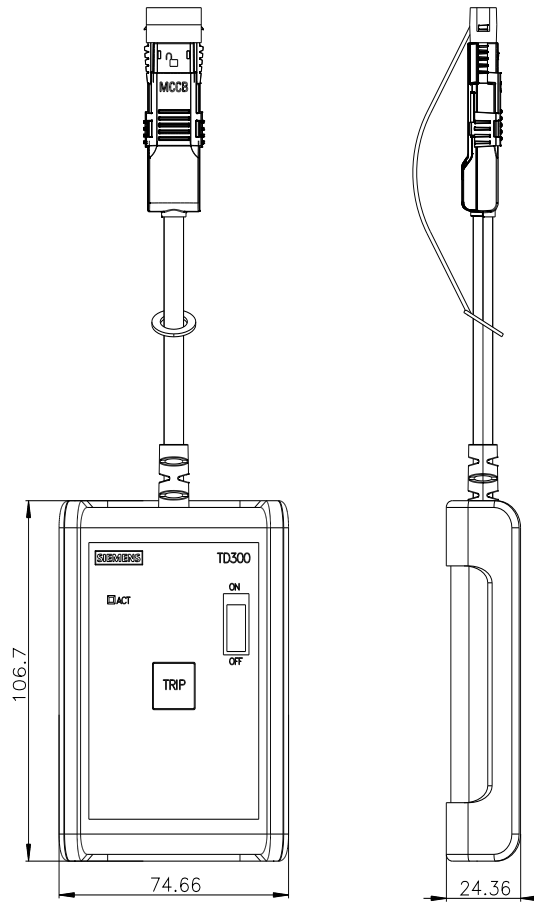

last modified:

5/26/2024

