


Product description

Shielded TP installation cable (8-core), sold by the meter, unassembled
 IE FC TP TRAILING CABLE GP 4X2, TP-INSTALLATION CABLE CAT6A, AWG 24, FOR CONNECTING TO IE FC RJ45 PLUG 4X2, AWG24, SOLD BY THE METER, MAX. CONSIGNMENT 1000 M MIN. ORDER QUANTITY 20 M

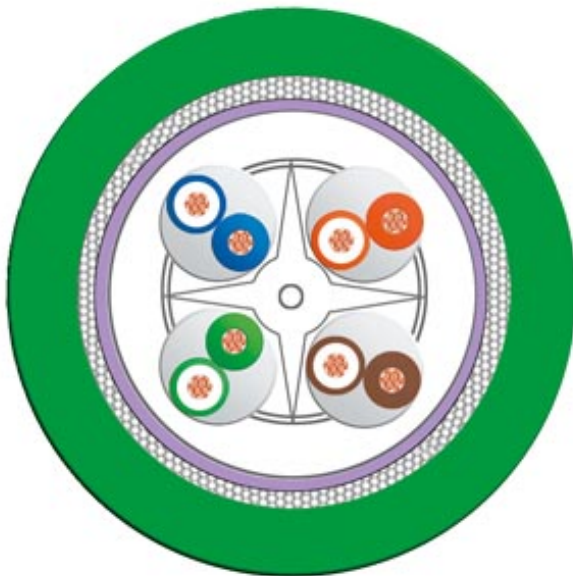

Electrical data

Damping ratio per length	
<ul style="list-style-type: none"> • at 10 MHz / maximum • at 100 MHz / maximum • at 250 MHz / maximum • at 300 MHz / maximum • at 500 MHz / maximum 	0.089 dB/m 0.287 dB/m 0.466 dB/m 0.514 dB/m 0.679 dB/m
Impedance	
<ul style="list-style-type: none"> • at 1 MHz ... 100 MHz 	100 Ω
Near-end crosstalk per length	
<ul style="list-style-type: none"> • at 1 MHz ... 100 MHz • at 1 MHz ... 250 MHz • at 1 MHz ... 300 MHz • at 1 MHz ... 500 MHz 	0.453 dB/m 0.393 dB/m 0.381 dB/m 0.348 dB/m
Transfer impedance per length / at 10 MHz	80 mΩ/m
Loop resistance per length / maximum	180 mΩ/m
Insulation resistance coefficient	5000 GΩ·m

Operating voltage	
• RMS value	80 V
• maximum	80 V
NVP value in percent	67 %

Mechanical data

Number of electrical cores	8
Design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
Type of electrical connection / FastConnect	Yes
Core diameter	
• of the AWG24 core	0.51 mm
Outer diameter	
• of inner conductor	0.58 mm
• of the wire insulation	1.04 mm
• of the inner sheath of the cable	6.5 mm
• of cable sheath	8 mm
Symmetrical tolerance of the outer diameter / of cable sheath	0.2 mm
Material	
• of the wire insulation	PE
• of the inner sheath of the cable	FRNC
• of cable sheath	PUR
Color	
• of the insulation of data wires	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown
• of cable sheath	green
Bending radius	
• with single bend / minimum permissible	32 mm
• with multiple bends / minimum permissible	64 mm
• with continuous bending	120 mm
Number of bending cycles	1000000
Tensile load / maximum	100 N
Weight per length	102 kg/km

Permitted ambient conditions

Ambient temperature	
• during operation	-30 ... +70 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
• during installation	-40 ... +80 °C
Burning behavior	flame resistant according to IEC 60332-1-2
Chemical resistance	
• to mineral oil	oil resistant according to IEC 60811-404 (7x24h/90°C)

<ul style="list-style-type: none"> • to grease • to water 	Conditional resistance conditional resistance
Radiological resistance / to UV radiation	resistant

Product properties, functions, components / general

Product feature	
<ul style="list-style-type: none"> • halogen-free • silicon-free 	Yes Yes
Wire length / for Industrial Ethernet	
<ul style="list-style-type: none"> • with 100BaseTX • with 1000BaseT • for 10GBase T 	50 m 50 m 50 m

Standards, specifications, approvals

UL/ETL listing / 300 V Rating	Yes
UL/ETL style / 600 V Rating	Yes
Certificate of suitability	
<ul style="list-style-type: none"> • CE marking • RoHS conformity 	Yes Yes
Product conformity	
<ul style="list-style-type: none"> • ANSI/TIA-EIA 568-B.2 Cat.5e • IEC 61784-5-2-CP 2/2 (Ethernet/IP) 	No Yes
Standard for structured cabling	Cat6A
Marine classification association	
<ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) • Bureau Veritas (BV) • Det Norske Veritas (DNV) • Germanische Lloyd (GL) • Lloyds Register of Shipping (LRS) • Nippon Kaiji Kyokai (NK) • Polski Rejestr Statkow (PRS) 	No No No No No No No

Further Information / Internet Links

Internet-Link	
<ul style="list-style-type: none"> • to website: Selector SIMATIC NET SELECTION TOOL • to website: Industrial communication • to website: Industry Mall • to website: Information and Download Center • to website: Image database • to website: CAx Download Manager • to website: Industry Online Support 	http://www.siemens.com/snst http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter http://automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com

last modified:

08/28/2017