


E10210



Connecting cable with socket

ADOAA030MSS0005H03

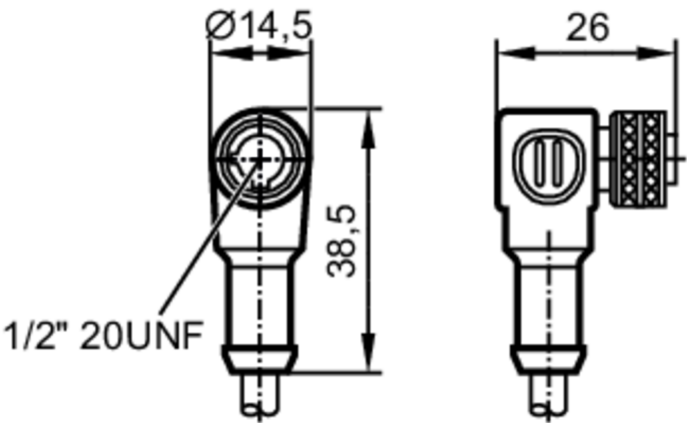

Electrical data		
Operating voltage	[V]	< 250 AC / < 300 DC
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 67
Mechanical data		
Weight	[g]	204.8
Dimensions	[mm]	26 x 14.5 x 38.5
Materials		TPU black
Material nut		brass
Drag chain suitability	bending radius for flexible use	min. 10 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	bending cycles	> 2 Mio.
	torsional strain	± 180 °/m
Drag chain suitability		yes
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 5 m, PUR, Halogen-free, black, Ø 5.2 mm; 3 x 0.5 mm² (64 x Ø 0.1 mm )		
Electrical connection - socket		
Connector: 1 x 1/2", angled; Moulded body: TPU; Locking: brass, nickel-plated		

# E10210




## Connecting cable with socket

ADOAA030MSS0005H03



### Connection

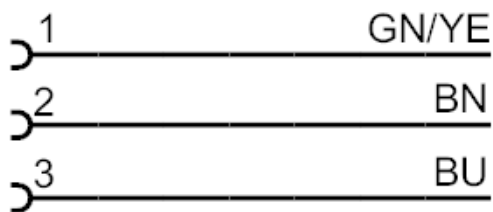

	Core colours :
BN =	brown
BU =	blue
GN/YE =	green/yellow