


E60028



Flexible coupling for encoders

COUPLING 25-6-10-24-SV

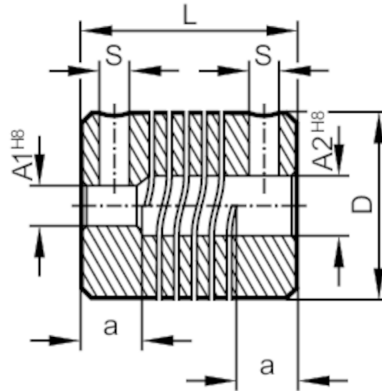

Mechanical data	
Weight	[g] 26.6
Materials	aluminium
External diameter D	[mm] 25
inside diameter A1	[mm] 6
inside diameter A2	[mm] 10
Length L	[mm] 24
depth of the clamping hub	[mm] 7
Clamp screw	[mm] M4
Max. revolution, mechanical	[U/min] 8000
Max. axial shaft misalignment	[mm] ± 0,5
Max. radial shaft misalignment	[mm] ± 0,3
Max. angular displacement	[°] ± 4,0
Remarks	
Remarks	The data indicated apply to couplings with the above hub borings at an ambient temperature of 23 °C. The values of radial, angular and axial displacement are maximum values which must not reach their maximum simultaneously while in operation.
Pack quantity	1 pcs.