


E70588



AS-Interface power distributor

QUAD M12 AS-i/24V 4A

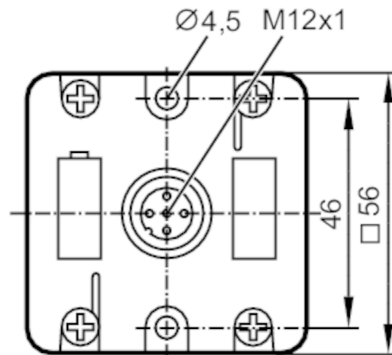

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Max. current load total	[A]	2
Additional voltage supply	[V]	24 DC

Outputs

Electrical design	AS-i
-------------------	------

Operating conditions

Ambient temperature	[°C]	-25...75
Protection	IP 65	

Mechanical data

Weight	[g]	92
Materials	PA 6.6; socket: stainless steel (1.4404 / 316L); screws: stainless steel (1.4404 / 316L); nut: stainless steel (1.4404 / 316L); O-ring: NBR; flat cable seal: NBR	

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

1	AS-i +
2	0V
3	AS-i -
4	+24V
5	functional earth

Connector: M12

