


# E12316



## Connection cable


VDOGH050MSS0002C02STG020MSS

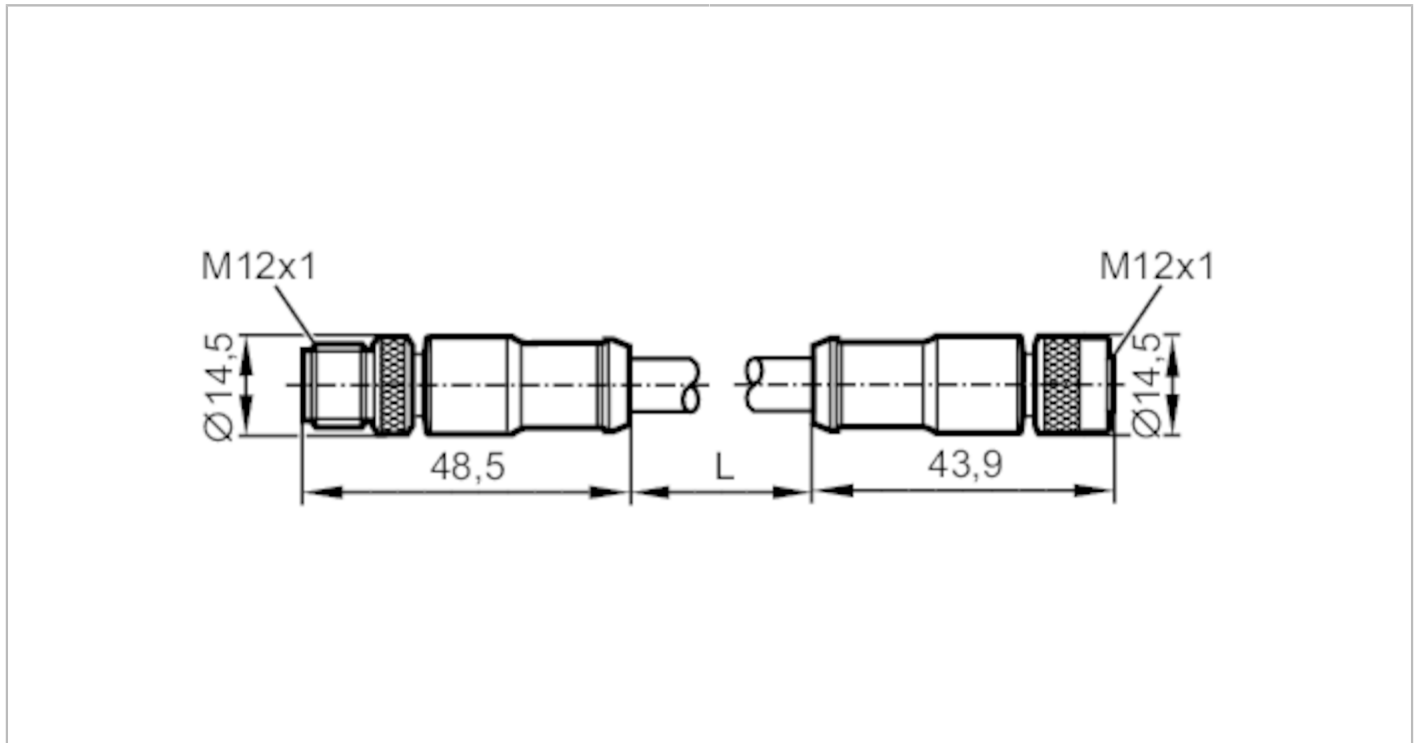

Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 67
Mechanical data		
Weight	[g]	163.2
Dimensions	[mm]	14.5 x 14.5 x 48.5
Materials		PUR
Material nut		brass / brass
Remarks		
Pack quantity		1 pcs.

**Electrical connection**  
Cable: 2 m, PUR, Halogen-free, lilac, Ø 8 mm, shielded; 2 x 0.25 mm<sup>2</sup>

**Electrical connection - socket**  
Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6 Nm;  
Shielded connection cable: screen connected



# E12316



## Connection cable


VDOGH050MSS0002C02STG020MSS

### Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6 Nm; Shielded connection cable: screen connected



### Connection

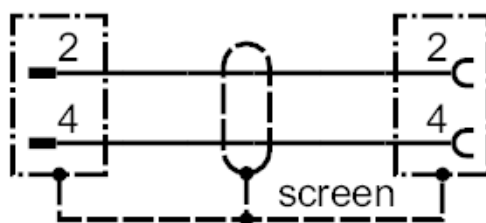

Core colours :

GN = green  
RD = red