

E70271




AS-Interface flat cable insulation displacement connector

FLAT CABLE CONNECTOR M12

Status Archive

/E70471

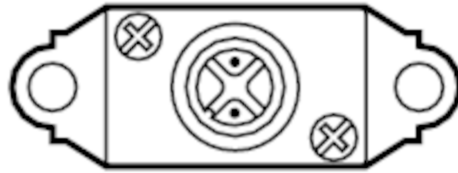

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

Mechanical data

Weight	[g]	16
Materials	Sealing: NBR; housing: PA; O-ring: FKM; screws: stainless steel (1.4305 / 303); Lock nut: stainless steel (1.4305 / 303); contact pins: bronze gold-plated	
Material nut	stainless steel (1.4305 / 303)	

Remarks

Remarks	circumferential seal
	coupling nut latches
Pack quantity	1 pcs.

Electrical connection

	AS-i flat cable yellow
1	ASi +
3	ASi -
	AS-i flat cable black
1	+ 24 V DC
3	0 V

Connector: M12; Locking: stainless steel (1.4305 / 303)

E70271



AS-Interface flat cable insulation displacement connector

FLAT CABLE CONNECTOR M12



Connection

Status Archive

/E70471