


# II5166



## Inductive sensor

IIB3010-BPKG

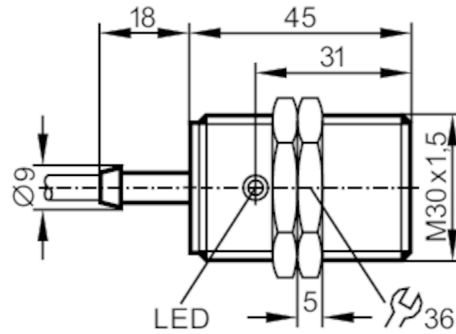

### Electrical data

Operating voltage	[V]	18...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		III
Reverse polarity protection		yes

### Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	125; (150 (...50 °C))
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

### Detection zone

Sensing range	[mm]	10
Real sensing range Sr	[mm]	10 ± 10 %
Operating distance	[mm]	0...8.1

### Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10

### Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

### Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	2279

# II5166



## Inductive sensor

IIB3010-BPKG

Mechanical data	
Weight [g]	218.4
Housing	threaded type
Mounting	flush mountable
Dimensions [mm]	M30 x 1.5 / L = 45
Thread designation	M30 x 1.5
Materials	brass nickel-plated; sensing face: PBT


Displays / operating elements		
Display	switching status	1 x LED, yellow

Accessories	
Accessories (supplied)	lock nuts: 2

Remarks	
Pack quantity	1 pcs.

**Electrical connection**  
Cable: 2 m, PVC; 3 x 0.5 mm<sup>2</sup>

### Connection

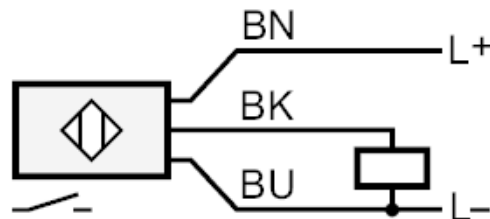

Core colours :

- BN = brown
- BU = blue
- BK = black