


# EVC518



## Connection cable

VDOG030MSS0015H03STGF030MSS

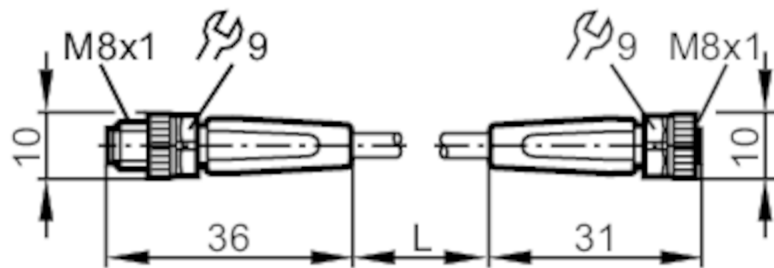

### Application

Free from silicone yes

### Electrical data

Operating voltage [V] < 50 AC / < 60 DC

Protection class III

Max. current load total [A] 3

### Operating conditions

Ambient temperature [°C] -25...90

Note on ambient temperature cULus: ...80

Ambient temperature (moving) [°C] -25...90

Note on ambient temperature (moving) cULus: ...80

Protection IP 65; IP 67; IP 68; IP 69K

### Mechanical data

Weight [g] 304.8

Materials housing: TPU orange; Sealing: FKM

Material nut brass / brass

	bending radius for flexible use	min. 10 x cable diameter
Drag chain suitability	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup>
	bending cycles	> 5 Mio.
	torsional strain	± 180 °/m

Drag chain suitability yes

# EVC518



## Connection cable

VDOGF030MSS0015H03STGF030MSS

### Remarks

Pack quantity


1 pcs.

### Electrical connection

Cable: 15 m, PUR, Halogen-free, black, Ø 3.7 mm; 3 x 0.25 mm<sup>2</sup> (32 x Ø 0.1 mm )

### Electrical connection - socket

Connector: 1 x M8, straight; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.3...0.5 Nm



### Electrical connection - plug

Connector: 1 x M8, straight; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.3...0.5 Nm



### Connection

