



RC6020



Incremental encoder with solid shaft

RC-0500-I24/J

Status Archive

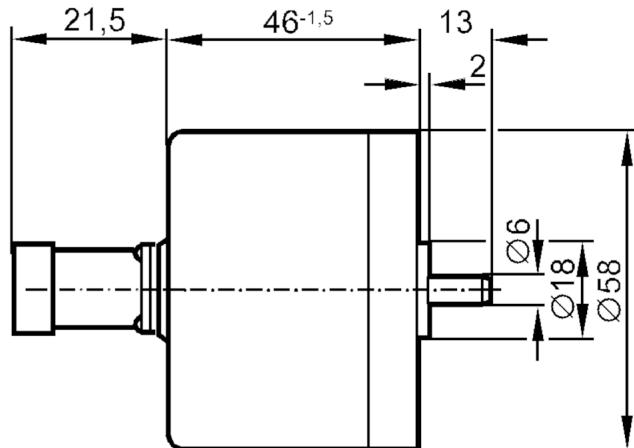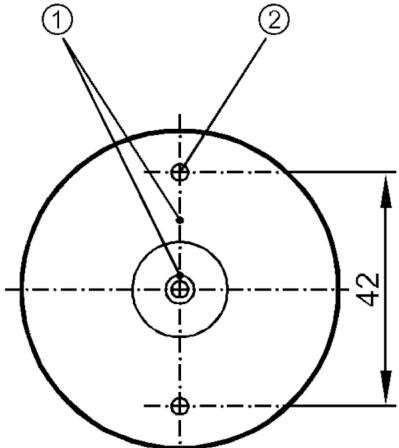

- 1 reference mark
2 M3 Depth 5 mm



Application

Function principle	incremental
--------------------	-------------

Electrical data

Operating voltage [V]	10...30 DC
-----------------------	------------

Current consumption [mA]	150
--------------------------	-----

Outputs

Electrical design	HTL
-------------------	-----

Max. current load per output [mA]	50
-----------------------------------	----

Switching frequency [kHz]	160
---------------------------	-----

Type of short-circuit protection	< 60 s
----------------------------------	--------

Phase difference A und B [°]	90
------------------------------	----

Measuring/setting range

Resolution	500 resolution
------------	----------------

Operating conditions

Ambient temperature [°C]	-20...85
--------------------------	----------

Storage temperature [°C]	-30...100
--------------------------	-----------

Max. relative air humidity [%]	98
--------------------------------	----


Protection	IP 64
------------	-------

RC6020



Incremental encoder with solid shaft

RC-0500-I24/J

Tests / approvals		
Shock resistance		100 g (6 ms)
Vibration resistance		15 g (55...2000 Hz)
Mechanical data		
Weight	[g]	393.2
Dimensions	[mm]	Ø 58 / L = 80.5
Materials		aluminium
Max. revolution, mechanical [U/min]		12000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	6
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20
Electrical connection		
1		B inverted
2		L+ sensor
3		0 index
4		0 index inverted
5		A
6		A inverted
7		failure inverted
8		B
9		n.c.
10		0V
11		0V sensor
12		L+
Connector: 1 x M23 (ifm 1001.4), axial		
		

RC6020




Incremental encoder with solid shaft

RC-0500-I24/J

Diagrams and graphs

Pulse diagram



Output A

Output B

0 index

Status Archive
