

AC2508




AS-Interface ClassicLine module

ClassicLine45 4DO T M12

Status Archive

/AC5208

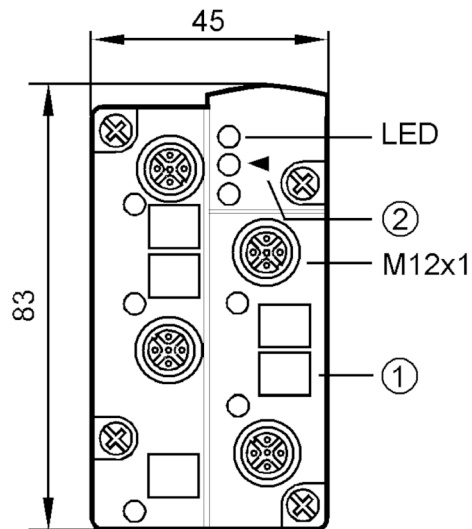

- 1 panel for labelling
- 2 fixture infrared adapter



Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	50
Max. current load total [A]	2
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 4
Outputs	
Electrical design	AS-i
Number of digital outputs	4
Beschaltung	PNP
Voltage range DC	15...30; (to PELV; via flat cable; for cULus the voltage must comply with the values specified in "Limited Voltage/Current")
Max. current load per output [mA]	1000; (utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1); according to cULus: 700 mA)
Short-circuit proof	yes
Electrically separated	yes
Operating conditions	
Ambient temperature [°C]	-25...70
Protection	IP 67



AS-Interface ClassicLine module

ClassicLine45 4DO T M12


Tests / approvals					
EMC	EN 50295				
MTTF [years]	255				
AS-i classification					
AS-i version	2.1				
AS-i addressing	IR addressing possible				
Extended addressing mode possible	no				
AS-i profile	S-8.0.E				
AS-i I/O configuration [hex]	8				
AS-i ID code [hex]	0.E				
AS-i certificate	39201				
Assignment of the data bits	data bit	D0	D1	D2	D3
	Output	1	2	3	4
	socket	O-1	O-2	O-3	O-4
	pin	4	4	4	4
Mechanical data					
Weight [g]	109				
Type of mounting	AS-i interface to FC-E lower parts				
Materials	PBT				
Displays / operating elements					
Display	operation	LED, green			
	errors	LED, red			
	function	LED, yellow			
Accessories					
Accessories (optional)	Module lower part				
Remarks					
Notes	discontinued article				
Pack quantity	1 pcs.				
Electrical connection					
contact pins to module lower part, FK-E:					
	Outputs				
1	not used				
2	not used				
3	external voltage AUX -				
4	switching output +				
5	not used				
Connector: M12					

AC2508



AS-Interface ClassicLine module

ClassicLine45 4DO T M12



Status Archive

/AC5208