


## Flexible coupling for encoders

COUPLING 19,2-4-6-22-SV

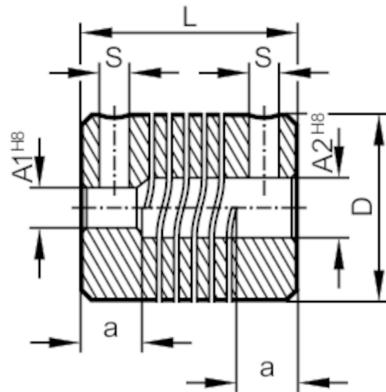

## Mechanical data

Weight	[g]	14.6
Materials		aluminium
External diameter D	[mm]	19
inside diameter A1	[mm]	4
inside diameter A2	[mm]	6
Length L	[mm]	22
depth of the clamping hub	[mm]	6
Clamp screw	[mm]	M3
Max. revolution, mechanical [U/min]		8000
Max. axial shaft misalignment [mm]		± 0,4
Max. radial shaft misalignment [mm]		± 0,25
Max. angular displacement [°]		± 3,5

## Remarks

Remarks	The data indicated apply to couplings with the above hub borings at an ambient temperature of 23 °C.
	The values of radial, angular and axial displacement are maximum values which must not reach their maximum simultaneously while in operation.
Pack quantity	1 pcs.