

SIRIUS ACT with PROFINET: Standard interface module 24V DC, screw terminal, Front plate mounting 1 to 20 terminal modules connectable



Product brand name	SIRIUS ACT
Product designation	Interface module
Product type designation	3SU1

### Display

<b>Display version</b> <ul style="list-style-type: none"> <li>• for diagnostic function: Supply voltage monitoring Power LED</li> <li>• status Tx/Rx link</li> </ul>	<p>Yes</p> <p>Yes</p>
--	-----------------------

### General technical data

<b>Product function</b> <ul style="list-style-type: none"> <li>• Reverse polarity protection</li> <li>• Diagnostics function</li> <li>• Alarms</li> <li>• I&amp;M data</li> </ul>	<p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes; I&amp;M0 ... I&amp;M3</p>
<b>Firmware version</b>	1.0.0
<b>Hardware version</b>	1
<b>Configuration function with dataset</b>	Yes
<b>Software version with STEP 7 in the TIA Portal required</b>	Integrated in TIA Portal Version 14 SP1 or higher (HSP for V13 and V14)

<b>Number of units per rack maximum</b>	20
<b>Number of submodules per station maximum</b>	24
<b>Power loss [W] typical</b>	0.67 W
Insulation voltage rated value	30 V
<b>Degree of pollution</b>	3
<b>Type of voltage</b>	
• of the operating voltage	DC
• of the input voltage	DC
<b>Surge voltage resistance rated value</b>	0.8 kV
<b>Consumed current</b>	
• maximum	100 mA
• Rated value	28 mA
<b>Protection class IP</b>	IP20
<b>Reference code acc. to DIN EN 81346-2</b>	K
Operating voltage rated value	20.4 V
<b>I<sup>2</sup>t value</b>	0.008 A <sup>2</sup> ·s

<b>Supply voltage</b>	
Supply voltage at DC Rated value	24 V

<b>Communication/ Protocol</b>	
<b>Product function at the Ethernet interface</b>	
• Autocrossover	Yes
• Autonegotiation	Yes
<b>Protocol at the 1st interface</b>	
• media redundancy protocol	No
<b>Product function at the 1st interface</b>	
• PROFINET IO device	Yes
<b>Product function of the PROFINET IO device is supported PROFINET system redundancy (S2)</b>	No
<b>Service as PROFINET IO device</b>	
• prioritized startup	No
• isochronous mode	No
• supports Shared Device	No
• supports PROFINET energy	No
• IRT	No
• MRP	No
• MRPD	No
<b>Service for open IE communication</b>	
• LLDP	Yes
• SNMP	Yes
• TCP/IP	Yes
<b>GSD version/revision with PROFINET required</b>	V2.3
<b>Transmission mode for Industrial Ethernet</b>	PROFINET with 100 Mbps full duplex (100BASE-TX)




<b>Network load class acc. to PROFINET</b>	1
<b>Specification for Security Level 1 test acc. to PROFINET</b>	Resilient to network loading
<b>Control circuit/ Control</b>	
<b>Inrush current maximum</b>	16 A
<b>Galvanic isolation</b>	
Galvanic isolation between PROFINET and all other circuits	Yes
<b>Inputs/ Outputs</b>	
<b>Number of digital inputs</b>	0
• safety-related	0
<b>Number of digital outputs</b>	0
<b>Connections/Terminals</b>	
<b>Type of electrical connection</b>	screw-type terminals
<b>Connectable conductor cross-section for auxiliary contacts</b>	
• single or multi-stranded	0.2 ... 2.5 mm <sup>2</sup>
• finely stranded with core end processing	2.5 mm <sup>2</sup>
<b>Connectable conductor cross-section</b>	
• solid	0.2 ... 2.5 mm <sup>2</sup>
• solid with core end processing	0.2 ... 2.5 mm <sup>2</sup>
• finely stranded with core end processing	0.25 ... 2.5 mm <sup>2</sup>
• finely stranded without core end processing	0.2 ... 2.5 mm <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	30 ... 12
Tightening torque with screw-type terminals	0.5 ... 0.6 N·m
<b>Safety related data</b>	
<b>Service life maximum</b>	20 y
<b>Design of the interface</b>	
• Ethernet interface	Yes; for Ethernet services
• Fast Ethernet interface	Yes; PROFINET with 100 Mbps
<b>Interface design 1</b>	
• integrated switch	No
• RJ45 (Ethernet)	Yes
<b>Number of ports at the 1st interface</b>	1
Number of interfaces acc. to PROFINET	1
<b>Ambient conditions</b>	
<b>Ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C

Environmental category during operation acc. to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted)
Explosion protection marking for intrinsic safety of related equipment EEx ia	No
Explosion protection marking for intrinsic safety of related equipment EEx ib	No

### Installation/ mounting/ dimensions

Mounting type of modules and accessories	Snap-on mounting
Height	80.1 mm
Width	40 mm
Depth	72.1 mm

### Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates
 UL	 EAC	 EG-Konf.
	<a href="#">Miscellaneous</a>	<a href="#">Special Test Certificate</a>
		<a href="#">Type Test Certificates/Test Report</a>

### other

[Confirmation](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-1LK10-1AA1>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-1LK10-1AA1>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-1LK10-1AA1>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1400-1LK10-1AA1&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-1LK10-1AA1&lang=en)

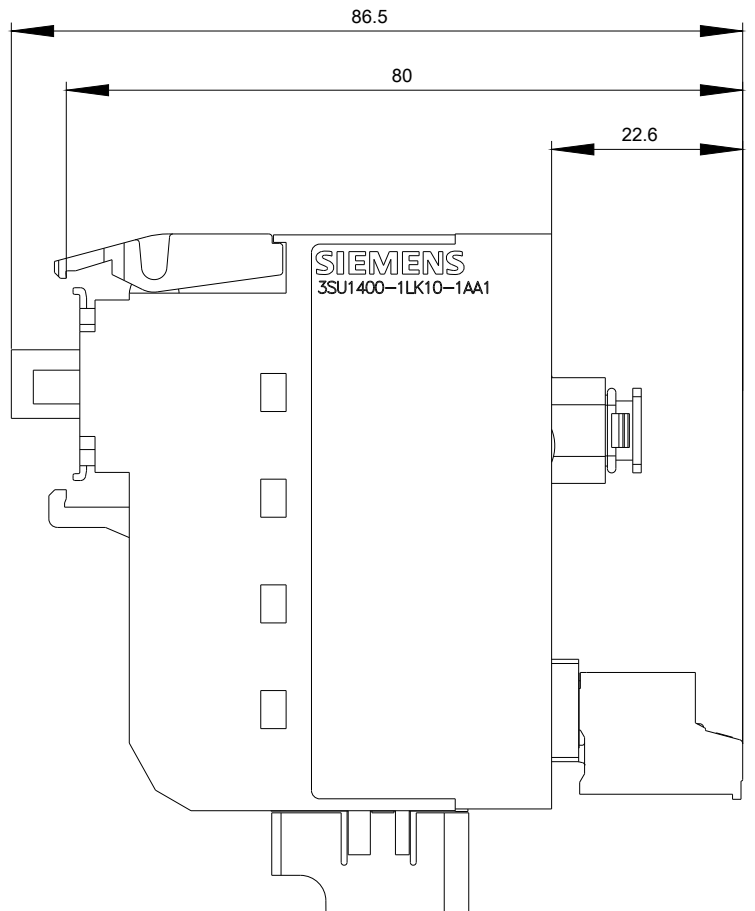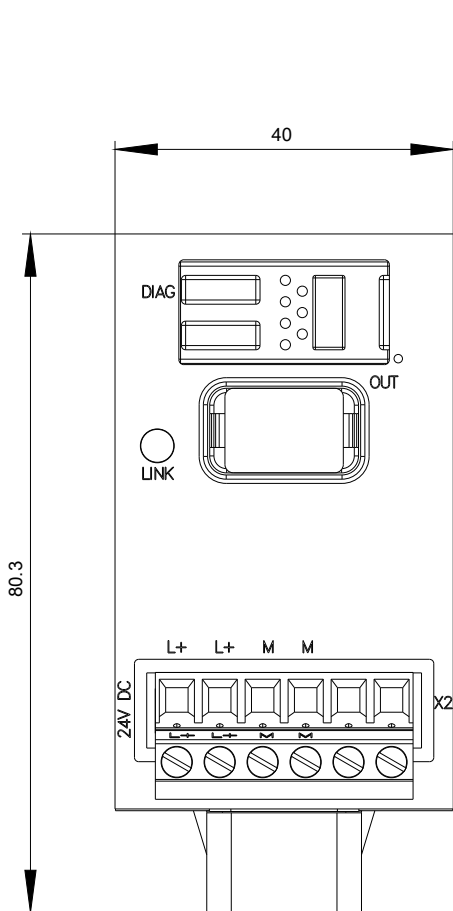

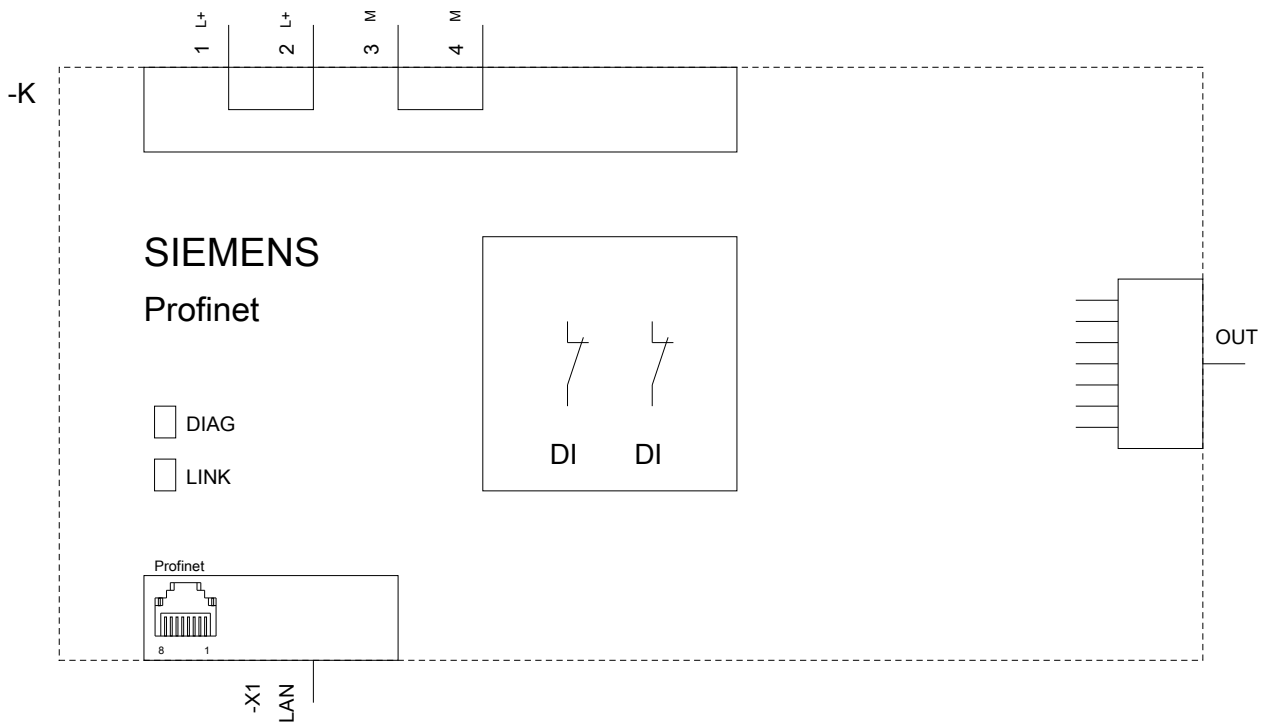

last modified:

02/21/2019