



Price\* : 571.54 GBP



### Main

Range of product	Harmony XVC1
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Siren
Mounting diameter	100 mm
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	0...102 dB (continuous or intermittent tone) at 1 m

### Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product mounting	On base
Cable cross section	0.33 mm <sup>2</sup> 0.83 mm <sup>2</sup>
AWG gauge	AWG 18 AWG 22
Cable length	500 mm
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	320 mA
Flashing frequency	0.7...3 Hz
Product weight	2.08 kg

Height	449 mm
--------	--------

## Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-20...50 °C
Electrical shock protection class	Class I conforming to EN/IEC 61140
IP degree of protection	IP54 conforming to EN/IEC 60529

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


## Contractual warranty

Warranty	18 months
----------	-----------

Pre-assembled and Pre-wired Tower Light with Siren

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

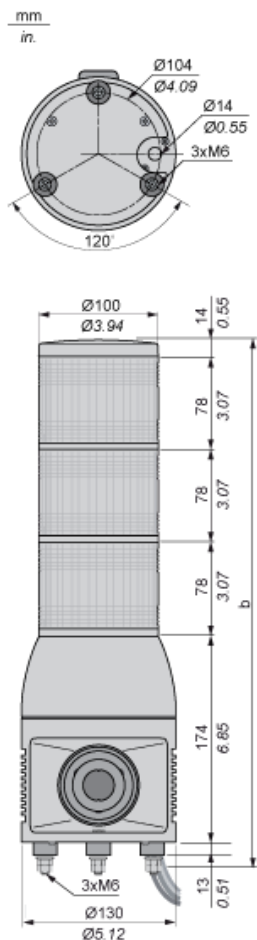

No. of illuminated units	b in mm	b in in.
1	293	11.54
2	371	14.61
3	449	17.68

Pre-assembled and Pre-wired Tower Light with Siren

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

