



**Technical data**

**General specifications**

Sensor range		SU18: 8 mm SU18/35: 25 mm SU19: 8 mm
Fiber optic length	l	2000 mm
Fiber optic diameter	d	1.25 mm
Adapter form		00
End piece		Cylindrical
Bending radius		min. 15 mm
Fiber configuration	Fv	see dimensions
Angle of divergence		67 °

**Ambient conditions**

Ambient temperature		-55 ... 70 °C (-67 ... 158 °F)
---------------------	--	--------------------------------

**Mechanical specifications**

Material		
Optical face		plastic
Sheathing		PVC
Core		plastic
End piece		Stainless steel 1.4305 / AISI 303

**Model Number**

**KLR-C04-1,25-2,0-K79**

Plastic fiber optic - diffuse

**Series**

**Fiber optic amplifiers**

Device series SU18 ; SU18/35 ; SU19


**Description**

**Attention:**

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



**Dimensions**

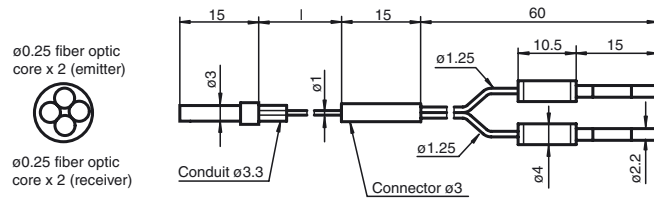

Release date: 2016-03-29 13:51 Date of issue: 2016-03-29 805633\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com