# **SIEMENS**

Product data sheet 3NA3814



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 000, 35A, AC 500V/DC 250V

#### Similar to image

Technical data:		
Current / for AC / rated value	А	35
Operating class of the fuse link		gG
Size of the fallback-system / acc. to DIN EN 60269-1		NH000
Supply voltage		
• for AC / rated value	V	500
• for DC	V	250
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	120
• with DC / in accordance with IEC 60947-2 / rated value	kA	25
Design of an identification indicator		Front indicators
type of the assembly		Non-insulated grip lugs
Protection class IP		IP20, with connected conductors
Climatic class		-20 to +50 at 95% relative humidity
Ambient temperature		
• minimum	°C	-5
• maximum	°C	40
Product description		Using screw adapter or adapter sleeves

## Certificates/approvals:

### **General Product Approval**

Declaration of Conformity

**Test Certificates** 









Special Test Certificate Type Test
Certificates/Test
Report

**Shipping Approval** 

other



Environmental Confirmations

GL

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3NA3814/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3NA3814}}$ 


**CAx-Online-Generator** 

http://www.siemens.com/cax

**Tender specifications** 

Datanorm GAEB81 GAEB83 RTF TXT

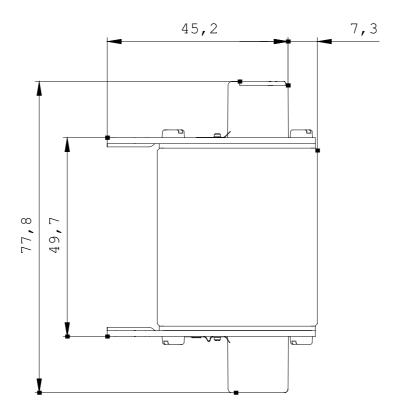



last change: Jan 28, 2013