



SITOR CYLINDRICAL FUSE LINK AR 8 A,  
600 V AC/400V DC

Similar to image

**Technical data:**

<b>Current / for AC / rated value</b>	A	8
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		10 x 38
<b>Supply voltage</b>		
• for AC / rated value	V	690
• for DC	V	500
<b>Switching capacity current</b>		
• in accordance with IEC 60947-2 / rated value	kA	200
• with DC / in accordance with IEC 60947-2 / rated value	kA	10
<b>Design of an identification indicator</b>		others
<b>Ambient temperature</b>	°C	-20 ... +50

**Certificates/approvals:**

**General Product Approval**

**Declaration of Conformity**



**Further information:**

---

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

---

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

---

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NC1008/all>

---


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NC1008](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1008)

---

CAX-Online-Generator

<http://www.siemens.com/cax>

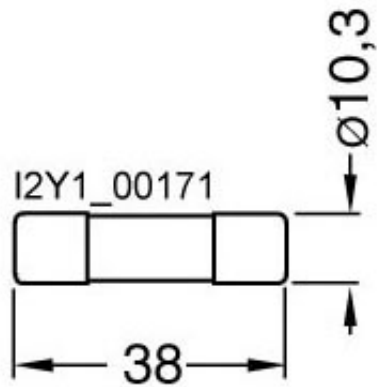

last change:

Feb 15, 2013