SIEMENS

Product data sheet

3RT2926-1BC00



SURGE SUPPRESSOR, VARISTOR, AC 48...127V, DC 70...150V, FOR MOTOR CONTACTORS SZ S0,

General technical data:					
product brand name		SIRIUS			
product designation		surge suppressor			
Size of the contactor		S0			
Design of the surge suppressor		with varistor			
Ambient temperature					
during storage	°C	-40 +80			
during operating	°C	-25 +60			


Control		
	Un Uditi	

Type of voltage / of the controlled supply voltage		AC/DC
Type of voltage / of the controlled supply voltage		AC/DC
Control supply voltage frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1		
• for DC		
initial rated value	V	70
final rated value	V	150
• at 50 Hz / for AC		
initial rated value	V	48
final rated value	V	127

V	127			
V	48			
Installation/mounting/dimensions:				
	any			
	clip-on			
mm	30			
mm	19			
mm	12			
	V mm mm			

Certificates/appro	ovals:					
Verification of suitability		CE /	UL / CSA / CCC			
General Product Approval		Declaration of Conformity	Test Certificates			
(SA)	GOST		EG-Konf.	Special Test Certificate		
Shipping Approva	I					
ABS	BUREAU VERITAS	ĴŠ DIV DIV	GL	Lloyd's Register Lrs	PRS	
Shipping Approva	I	other				
RINA	RMRS	Confirmation	VDE			
Further information	on:					
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs						
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall						
CAx-Online-Generator http://www.siemens.com/cax						
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/3RT2926-1BC00/all						
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,)						

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2926-1BC00

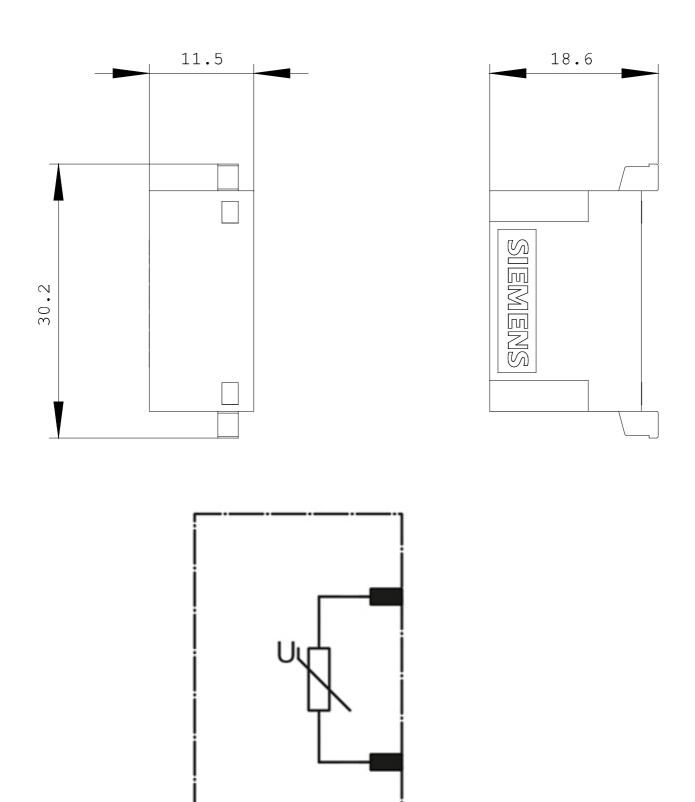

last change:

Jan 21, 2013