



SIRIUS POSITION SWITCH;
 PLASTIC HOUSING OPEN TYPE 30MM METAL
 PLUNGER,
 CAN BE EQUIPPED WITH ANY CONTACTS

General technical data:		
Product designation		empty enclosure, open type
Explosion protection category for dust		none
Resistance against vibration		0.35 mm / 5g
Ambient temperature		
• during operating	°C	-25 ... +85
• during storage	°C	-40 ... +90
Width of the sensor	mm	30
Material		
• of the enclosure		plastic, open-type
Material / of the enclosure / of the switch head		plastic
Design of the operating mechanism		Metal plunger
Actuating speed	/ m/s	1.5
Minimum actuating force / in activation direction	N	20
mounting position		any
Reference code		
• according to DIN 40719 extended according to IEC 204-2		S
• according to DIN EN 61346-2		B

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
 	 	Special Test Certificate	Confirmation

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5250-0AC05/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5250-0AC05

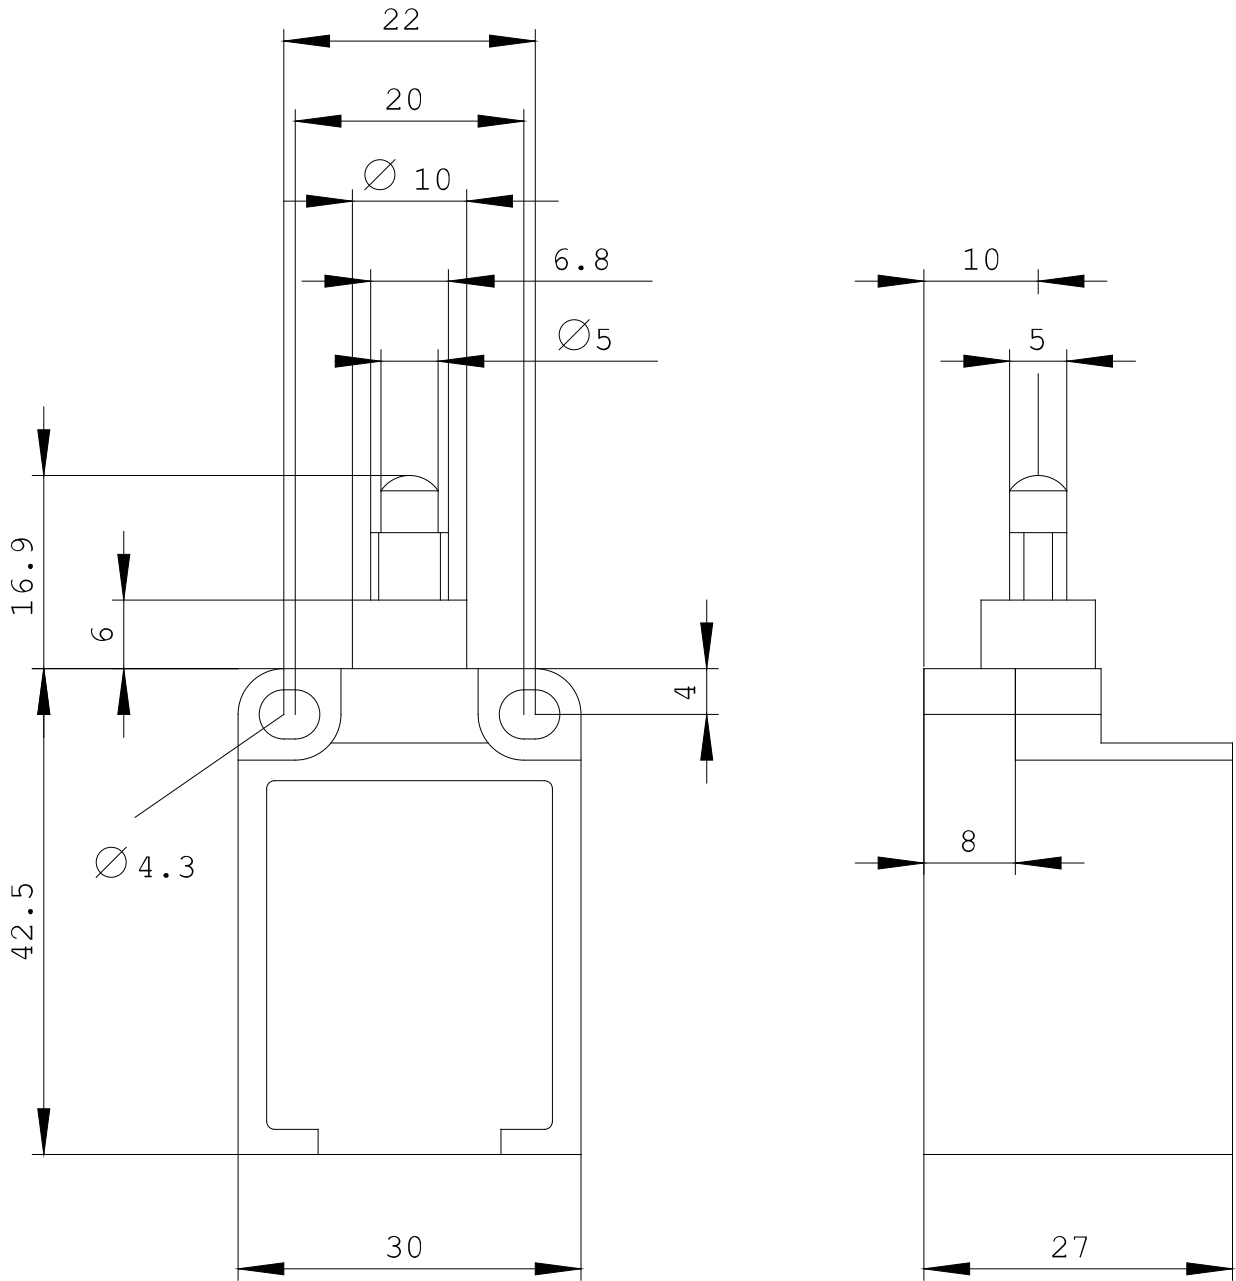

last change:

Jul 28, 2014