SIEMENS

Product data sheet

3SE5250-0PC05



SIRIUS POSITION SWITCH; PLASTIC HOUSING NOT ENCAPSULATED 30MM 2NO/1NC SLOW-ACTION CONTACTS METAL PLUNGER, IP10

General technical data:					
Product designation		standard position switch			
Explosion protection category for dust	-	none			
Insulation voltage					
rated value	V	250			
Degree of pollution		class 3			
Thermal current	А	6			
Operating current					
• at AC-15					
• at 24 V / rated value	А	6			
• at 125 V / rated value	А	6			
• at 230 V / rated value	А	1.5			
• at DC-13					
• at 24 V / rated value	А	3			
• at 125 V / rated value	А	0.55			
• at 230 V / rated value	А	0.27			
Continuous current					
of the slow DIAZED fuse link	А	6			
of the quick DIAZED fuse link	А	6			
of the C characteristic circuit breaker	А	1			

	EG-Konf.		Special Test Certificate	Confirmation	
General Product Approval	Declaration Conformity	of	Test Certificates	other	
Certificates/ approvals:					
according to DIN EN 61346-2		В			
according to DIN 40719 extended according to IEC 204-2		S			
Reference code					
Design of the electrical connection		screw-type terminals			
mounting position		any			
Protection class IP		IP10			
Minimum actuating force / in activation direction	Ν	20			
Actuating speed	mm/s / m/s	0.4 1.5			
Design of the operating mechanism		Metal plunger			
Material / of the enclosure / of the switch head		plastic			
of the enclosure		plastic, open-type			
Material					
Width of the sensor	mm	30			
during storage	°C	-40 +90			
during operating	°C	-25 +85			
Ambient temperature					
Resistance against shock		30g / 11 ms			
Resistance against vibration		0.35 mm / 5g			
for auxiliary contacts		2			
Number of NO contacts					
Design of the switching function		positive opening			
for auxiliary contacts		1			
Number of NC contacts					
Design of the contact element		slow-action contacts			
Repeat accuracy	mm	0.05			
 with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 		6,000			
Electrical operating cycles in one hour					
3RT1026 / typical • at AC-15 / at 230 V / typical		100,00	0		
 Electrical operating cycles as operating time with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 		10,000	,000		
			,		
typical		15,000	.000		

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


Cax online generator

http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3SE5250-0PC05/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5250-0PC05

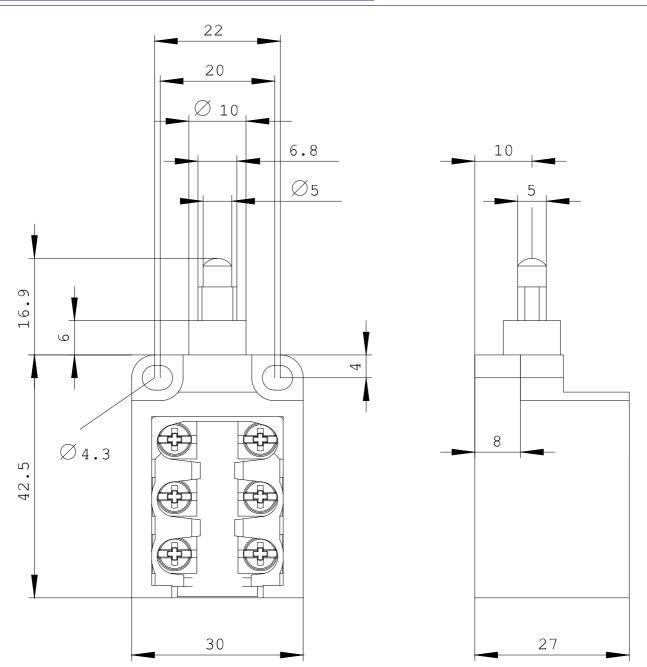

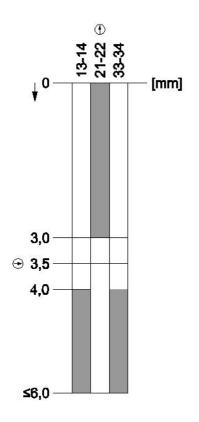

last change:

Jul 28, 2014