

SIRIUS SAFETY RELAY FOR SAFETY-ORIENTED STANDSTILL MONITORING,
 400V AC, 45.0MM,
 SPRING-LOADED TERMINAL,
 FK INSTANT.: 3NO 1NC, FK DELAYED: 0,
 MK: 3, AUTO START, BASIC UNIT,
 MAX. ACHIEV. CAT. EN954-1: 4,
 MAX. ACHIEV. SIL TO IEC61508:3,

General technical details:		
product brand name		SIRIUS
product designation		safety relays
Design of the product		for safe stoppage monitoring
protection class IP / of the housing		IP20
Protection class IP / of the terminal		IP20
Protection against electrical shock		finger-safe
Insulation voltage / rated value	V	690
Ambient temperature		
• during storage	°C	-40 ... +75
• during operating	°C	-25 ... +60
Air pressure		
• according to SN 31205	kPa	90 ... 106
Relative humidity		
• during operating phase	%	10 ... 95
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against vibration / according to IEC 60068-2-6		10 ... 55 Hz: 0.35 mm
Resistance against shock		8g / 10 ms
Impulse voltage resistance / rated value	V	6,000
EMC emitted interference		IEC 61000-6-2, IEC 61000-6-3

Installation environment relating to EMC		This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Item designation		
<ul style="list-style-type: none"> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 		KT
		F
Number of sensor inputs		
<ul style="list-style-type: none"> • 1-channel or 2-channel 		1
Design of the cascading		none
Type of the safety-related wiring / of the inputs		measuring inputs
Product feature / transverse contact-secure		No
Safety Integrity Level (SIL)		
<ul style="list-style-type: none"> • according to IEC 61508 • for delayed release circuit / according to IEC 61508 		SIL3
		SIL3
SIL claim limit (for a subsystem) / according to EN 62061		3
Performance Level (PL)		
<ul style="list-style-type: none"> • according to ISO 13849-1 • for delayed release circuit / according to ISO 13849-1 		e
		e
Category / according to EN 954-1		4
Category / according to ISO 13849-1		4
Hardware fault tolerance / according to IEC 61508		1
Safety device type / according to IEC 61508-2		Type B
Probability of dangerous failure per hour (PFHD) / with high demand rate / according to EN 62061	1/h	0.15E-8
T1 value / for proof test interval or service life / according to IEC 61508	a	20
Number of outputs / as contact-affected switching element		
<ul style="list-style-type: none"> • as NC contact / for reporting function / instantaneous switching • as NO contact / safety-related / instantaneous switching • as NO contact / safety-related / delayed switching 		2
		4
		0
Number of outputs / as contact-less semiconductor switching element		
<ul style="list-style-type: none"> • safety-related <ul style="list-style-type: none"> • delayed switching • non-delayed • for reporting function <ul style="list-style-type: none"> • delayed switching • non-delayed 		0
		0
		0
		2
Stop category / according to DIN EN 60204-1		0

General technical details:

Design of the input		
• cascading-input/functional switching		No
• feedback input		Yes
• start input		No
Design of the electrical connection / jumper socket		Yes
Operating cycles / maximum	1/h	1,200
Switching capacity current		
• of semiconductor outputs		
• for signaling function / for DC-13 / at 24 V	A	0.1
• of NO contacts of relay outputs		
• at DC-13		
• at 24 V	A	2
• at AC-15		
• at 115 V	A	3
• at 230 V	A	3
• of NC contacts of relay outputs		
• at DC-13		
• at 24 V	A	2
• at AC-15		
• at 115 V	A	2
• at 230 V	A	2
Thermal current / of the contact-affected switching element / maximum	A	5
Electrical operating cycles as operating time / typical		200,000
Mechanical operating cycles as operating time / typical		50,000,000
Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required		quick: 5 A

Control circuit:

Type of voltage / of the controlled supply voltage		AC
Control supply voltage frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1 / at 50 Hz / for AC / rated value	V	400
Control supply voltage / 1 / at 60 Hz / for AC / rated value	V	400
operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.8 ... 1.1
• at 60 Hz		

• for AC

0.8 ... 1.1

Installation/mounting/dimensions:

mounting position		any
Type of mounting		screw and snap-on mounting
Width	mm	45
Height	mm	138.5
Depth	mm	120

Connections:

Design of the electrical connection		spring-loaded terminals
Type of the connectable conductor cross-section		2x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> • solid • finely stranded <ul style="list-style-type: none"> • with wire end processing • without wire end processing 		2 x (0.25 ... 1.5 mm ²) 2x (0.25 ... 1.5 mm ²)
Type of the connectable conductor cross-section / for AWG conductors		
<ul style="list-style-type: none"> • solid • stranded 		2x (24 ... 16) 2x (20 ... 16)

Product Function:

Product function		
<ul style="list-style-type: none"> • light barrier monitoring • standstill monitoring • protective door monitoring • automatic start • magnetic switch monitoring Normally closed contact-Normally open contact • rotation speed monitoring • laser scanner monitoring • monitored start-up • light grid monitoring • magnetic switch monitoring Normally closed contact-Normally closed contact • emergency stop function • step mat monitoring 		No Yes No No No No No No No No No No
Suitability for interaction / pressing control		No
Acceptability for application		
<ul style="list-style-type: none"> • safety cut-out switch • position switch monitoring 		Yes No

- EMERGENCY-OFF circuit monitoring
- valve monitoring
- tactile sensor monitoring
- magnetically operated switches monitoring
- safety-related circuits

No
No
No
No
Yes

Certificates/approvals:

Verification of suitability

- TÜV (German technical inspectorate) certificate
- UL-registration
- BG BIA certificate

UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508
Yes
Yes
Yes

General Product Approval

Functional Safety / Safety of Machinery

Test Certificates



CSA



GOST



UL



VDE

[Special Test Certificate](#)

other

[Declaration of Conformity](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3TK2810-0JA02/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TK2810-0JA02

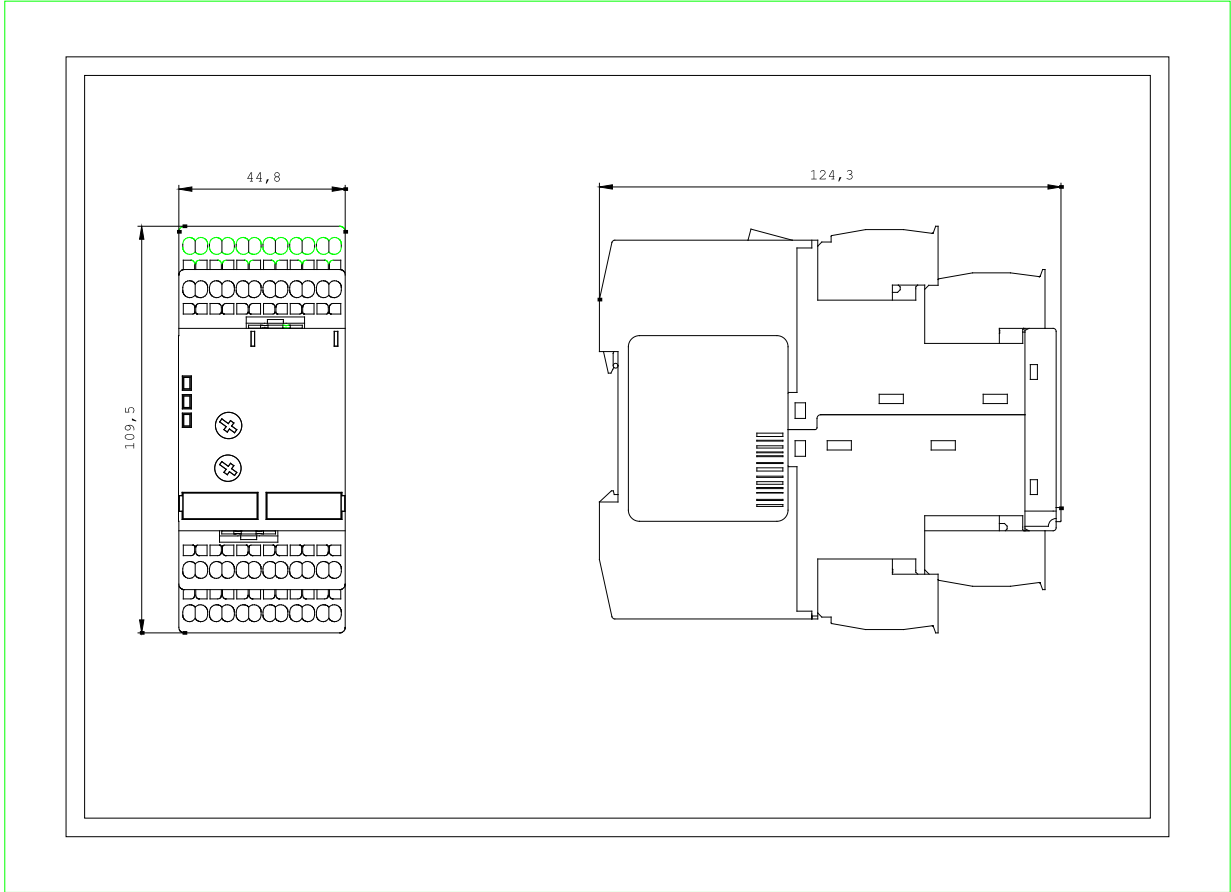

last change:

Feb 18, 2013