



SIRIUS SAFETY RELAY WITH RELAY RELEASE CIRCUITS (FK),
 24V AC/DC, 22.5MM, SCREW TERMINAL,
 FK INSTANT.: 4S, FK DELAYED: 0,
 MC FOR FEEDBACK: 1, EXPANSION UNIT,
 MAX. ERR. SIL / PL: AS GG,

General technical details:

product brand name		SIRIUS
Product designation		safety relays
Design of the product		extension unit
protection type IP / of the enclosure		IP40
Protection class IP / of the terminal		IP20
Protection against electrical shock		finger-safe
Insulation voltage / rated value	V	300
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
Air pressure		
• according to SN 31205	kPa	90 ... 106
Relative humidity		
• during operating phase	%	10 ... 95
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against vibration / according to IEC 60068-2-6		5 ... 500 Hz: 0,075 mm
Resistance against shock		8g / 10 ms
Impulse voltage resistance / rated value	V	4,000
EMC emitted interference		EN 60947-5-1

Installation environment relating to EMC		This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Reference code <ul style="list-style-type: none"> • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 		KT F
Design of the cascading		none
Product feature / transverse contact-secure		No
Safety Integrity Level (SIL) <ul style="list-style-type: none"> • according to IEC 61508 		SIL3
SIL claim limit (for a subsystem) / according to EN 62061		3
Performance Level (PL) <ul style="list-style-type: none"> • according to EN ISO 13849-1 		e
Category / according to EN 954-1		corresponds to basic unit
Category / according to EN ISO 13849-1		4
Hardware fault tolerance / according to IEC 61508		1
Safety device type / according to IEC 61508-2		Type A
PFHD / with high demand rate / according to EN 62061	1/h	0.12E-8
Average probability of failure on demand (PFDavg) / with low demand rate / according to IEC 61508	1/y	0.1E-5
T1 value / for proof test interval or service life / according to IEC 61508	a	20
Number of outputs / as contact-affected switching element <ul style="list-style-type: none"> • as NC contact / for reporting function / instantaneous switching • as NO contact / safety-related / instantaneous switching • as NO contact / safety-related / delayed switching 		0 4 0
Number of outputs / as contact-less semiconductor switching element <ul style="list-style-type: none"> • safety-related <ul style="list-style-type: none"> • delayed switching • non-delayed • for reporting function <ul style="list-style-type: none"> • delayed switching • non-delayed 		0 0 0 0
Stop category / according to DIN EN 60204-1		0
General technical details:		
Design of the input <ul style="list-style-type: none"> • cascading-input/functional switching • feedback input 		No Yes

• start input		No
Design of the electrical connection / jumper socket		Yes
Operating cycles / maximum	1/h	1,000
Switching capacity current		
• of NO contacts of relay outputs		
• at DC-13		
• at 24 V	A	5
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
• of NC contacts of relay outputs		
• at DC-13		
• at 24 V	A	5
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
Thermal current / of the contact-affected switching element / maximum	A	5
Electrical operating cycles as operating time / typical		100,000
Mechanical operating cycles as operating time / typical		10,000,000
Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required		gL/gG: 6 A, or quick: 10 A
Resistance to direct current / of the cable / maximum	Ω	30
Cable length / between sensor and electronic evaluation device / with Cu 1.5 mm² and 150 nF/km / maximum	m	1,000
Make time / with automatic start		
• for DC / maximum	ms	30
• for AC / maximum	ms	30
Make time / with automatic start / after mains power cut		
• maximum	ms	30
Backside delay time / at mains power cut		
• maximum	ms	25
Recovery time / after mains power cut / typical	ms	50
Control circuit:		
Voltage type / of control feed voltage		AC/DC
Control supply voltage frequency		

• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1 / for DC / rated value	V	24
Control supply voltage / 1 / at 50 Hz / for AC / rated value	V	24
Control supply voltage / 1 / at 60 Hz / for AC / rated value	V	24
operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		0.85 ... 1.1
• for AC		
• at 60 Hz		0.85 ... 1.1
• for AC		
• for DC		0.85 ... 1.2

Installation/mounting/dimensions:

mounting position		any
Mounting type		screw and snap-on mounting
Width	mm	22.5
Height	mm	120
Depth	mm	120

Connections:

Design of the electrical connection		screw-type terminals
Type of the connectable conductor cross-section		
• solid		1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded		
• with wire end processing		1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
Type of the connectable conductor cross-sections / for AWG conductors		
• solid		2x (20 ... 14)
• stranded		2x (20 ... 14)

Product Function:

Product function		
• light barrier monitoring		No
• standstill monitoring		No
• protective door monitoring		No
• automatic start		No
• magnetic switch monitoring Normally closed contact-Normally open contact		No
• rotation speed monitoring		No
• laser scanner monitoring		No

• monitored start-up	No
• light grid monitoring	No
• magnetic switch monitoring Normally closed contact-Normally closed contact	No
• emergency stop function	No
• step mat monitoring	No
Suitability for interaction / pressing control	No
Acceptability for application	
• safety cut-out switch	Yes
• position switch monitoring	No
• EMERGENCY-OFF circuit monitoring	No
• valve monitoring	No
• tactile sensor monitoring	No
• magnetically operated switches monitoring	No
• safety-related circuits	No

Certificates/approvals:

Verification of suitability	BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508
• TÜV (German technical inspectorate) certificate	Yes
• UL-registration	Yes
• BG BIA certificate	No

General Product Approval

EMC

Functional Safety / Safety of Machinery



CCC



CSA



UL



C-TICK



VDE

Declaration of Conformity

Test Certificates

other



EG-Konf.

[Special Test Certificate](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3TK2830-1CB30/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TK2830-1CB30

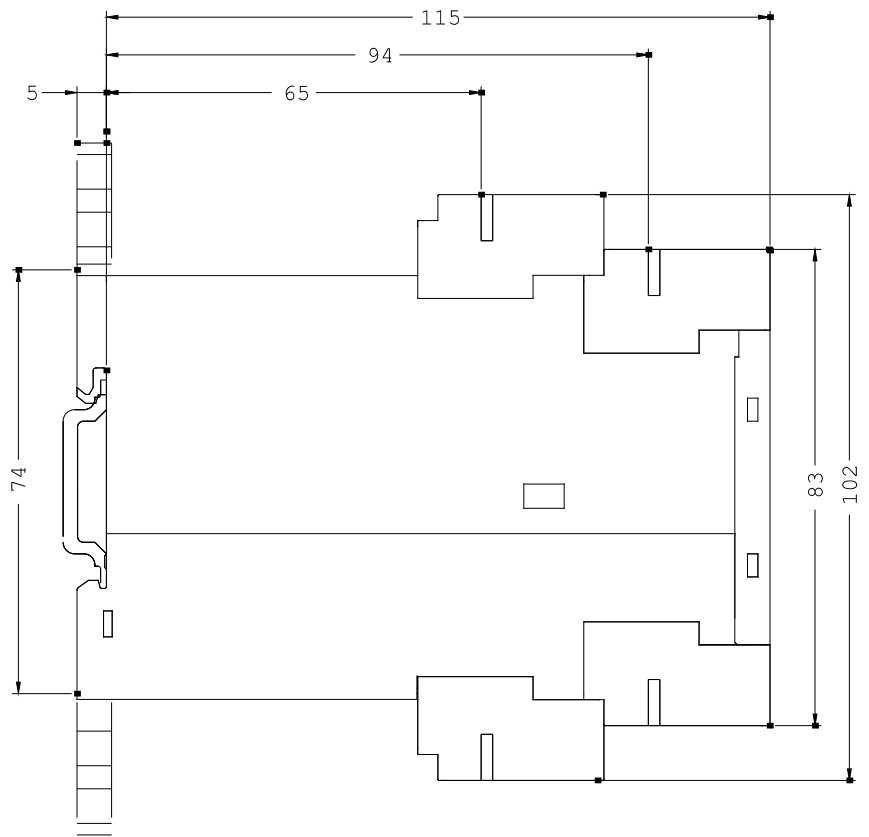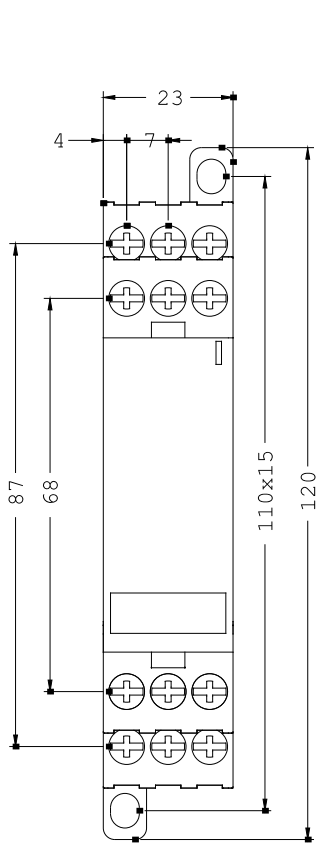

last change:

Jun 30, 2014