



SIRIUS SAFETY RELAY WITH RELAY RELEASE  
CIRCUITS (RC),  
AC 115V, 45.0MM, SCREW TERMINAL,  
RC INSTANT.: 2S, 2OE, RC DELAYED: 0,  
MK: 0, PRESS CONTROL UNIT,  
MAX. ACHIEVABLE SIL: 3, PL: E

### General technical details:

<b>product brand name</b>		SIRIUS
<b>Product designation</b>		safety relays
<b>Design of the product</b>		for press control units
<b>protection type IP / of the enclosure</b>		IP20
<b>Protection class IP / of the terminal</b>		IP20
<b>Protection against electrical shock</b>		finger-safe
<b>Insulation voltage / rated value</b>	V	300
<b>Ambient temperature</b>		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
<b>Air pressure</b>		
• according to SN 31205	kPa	90 ... 106
<b>Relative humidity</b>		
• during operating phase	%	10 ... 95
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Resistance against vibration / according to IEC 60068-2-6</b>		5 ... 500 Hz: 0,075 mm
<b>Resistance against shock</b>		8g / 10 ms
<b>Impulse voltage resistance / rated value</b>	V	4,000
<b>EMC emitted interference</b>		EN 60947-5-1

<b>Installation environment relating to EMC</b>		This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
<b>Reference code</b> <ul style="list-style-type: none"> <li>• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750</li> <li>• according to DIN EN 61346-2</li> </ul>		KT  F
<b>Number of sensor inputs</b> <ul style="list-style-type: none"> <li>• 2-channel</li> </ul>		1
<b>Design of the cascading</b>		none
<b>Type of the safety-related wiring / of the inputs</b>		two-channel
<b>Product feature / transverse contact-secure</b>		Yes
<b>Safety Integrity Level (SIL)</b> <ul style="list-style-type: none"> <li>• according to IEC 61508</li> </ul>		SIL3
<b>SIL claim limit (for a subsystem) / according to EN 62061</b>		3
<b>Performance Level (PL)</b> <ul style="list-style-type: none"> <li>• according to EN ISO 13849-1</li> </ul>		e
<b>Category / according to EN 954-1</b>		4
<b>Category / according to EN ISO 13849-1</b>		4
<b>Hardware fault tolerance / according to IEC 61508</b>		1
<b>Safety device type / according to IEC 61508-2</b>		Type A
<b>PFHD / with high demand rate / according to EN 62061</b>	1/h	0.14E-8
<b>T1 value / for proof test interval or service life / according to IEC 61508</b>	a	20
<b>Number of outputs / as contact-affected switching element</b> <ul style="list-style-type: none"> <li>• as NC contact / for reporting function / instantaneous switching</li> <li>• as NO contact / safety-related / instantaneous switching</li> <li>• as NO contact / safety-related / delayed switching</li> </ul>		0 4 0
<b>Number of outputs / as contact-less semiconductor switching element</b> <ul style="list-style-type: none"> <li>• safety-related <ul style="list-style-type: none"> <li>• delayed switching</li> <li>• non-delayed</li> </ul> </li> <li>• for reporting function <ul style="list-style-type: none"> <li>• delayed switching</li> <li>• non-delayed</li> </ul> </li> </ul>		0 0  0 0
<b>Stop category / according to DIN EN 60204-1</b>		0
<b>General technical details:</b>		
<b>Design of the input</b> <ul style="list-style-type: none"> <li>• cascading-input/functional switching</li> </ul>		No

• feedback input		Yes
• start input		No
<b>Design of the electrical connection / jumper socket</b>		Yes
<b>Operating cycles / maximum</b>	1/h	1,000
<b>Switching capacity current</b>		
• of NO contacts of relay outputs		
• at DC-13		
• at 24 V	A	6
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
• of NC contacts of relay outputs		
• at DC-13		
• at 24 V	A	6
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
<b>Thermal current / of the contact-affected switching element / maximum</b>	A	6
<b>Electrical operating cycles as operating time / typical</b>		100,000
<b>Mechanical operating cycles as operating time / typical</b>		10,000,000
<b>Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required</b>		gL/gG: 6 A, or quick: 10 A
<b>Resistance to direct current / of the cable / maximum</b>	Ω	30
<b>Cable length / between sensor and electronic evaluation device / with Cu 1.5 mm<sup>2</sup> and 150 nF/km / maximum</b>	m	1,000
<b>Make time / with automatic start</b>		
• for AC / maximum	ms	100
<b>Recovery time / after opening of the safety circuits / typical</b>	ms	250
<b>Control circuit:</b>		
<b>Voltage type / of control feed voltage</b>		AC
<b>Control supply voltage frequency</b>		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
<b>Control supply voltage / 1 / for AC / at 50 Hz / rated value</b>	V	115
<b>Control supply voltage / 1 / for AC / at 60 Hz / rated value</b>	V	115

<b>operating range factor control supply voltage rated value / of the magnet coil</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz <ul style="list-style-type: none"> <li>• for AC</li> </ul> </li> <li>• at 60 Hz <ul style="list-style-type: none"> <li>• for AC</li> </ul> </li> <li>• for DC</li> </ul>		0.85 ... 1.1
		0.85 ... 1.1
		0.85 ... 1.1

### Installation/mounting/dimensions:

<b>mounting position</b>		any
<b>Mounting type</b>		screw and snap-on mounting
<b>Width</b>	mm	44.8
<b>Height</b>	mm	138.5
<b>Depth</b>	mm	120

### Connections:

<b>Design of the electrical connection</b>		screw-type terminals
<b>Type of the connectable conductor cross-section</b>		
<ul style="list-style-type: none"> <li>• solid</li> </ul>		1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>• with wire end processing</li> </ul> </li> </ul>		1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<b>Type of the connectable conductor cross-sections / for AWG conductors</b>		
<ul style="list-style-type: none"> <li>• solid</li> </ul>		2x (20 ... 14)
<ul style="list-style-type: none"> <li>• stranded</li> </ul>		2x (20 ... 14)

### Product Function:

<b>Product function</b>		
<ul style="list-style-type: none"> <li>• light barrier monitoring</li> <li>• standstill monitoring</li> <li>• protective door monitoring</li> <li>• automatic start</li> <li>• magnetic switch monitoring Normally closed contact-Normally open contact</li> <li>• rotation speed monitoring</li> <li>• laser scanner monitoring</li> <li>• monitored start-up</li> <li>• light grid monitoring</li> <li>• magnetic switch monitoring Normally closed contact-Normally closed contact</li> <li>• emergency stop function</li> <li>• step mat monitoring</li> </ul>		No
		No
		No
		No
		No
		No
		No
		No
		No
		No
		No
		No

<b>Suitability for interaction / pressing control</b>	Yes
<b>Acceptability for application</b>	
• monitoring of floating sensors	Yes
• monitoring of non-floating sensors	No
• safety cut-out switch	Yes
• position switch monitoring	Yes
• EMERGENCY-OFF circuit monitoring	No
• valve monitoring	No
• tactile sensor monitoring	No
• magnetically operated switches monitoring	No
• safety-related circuits	Yes

### Certificates/approvals:

<b>Verification of suitability</b>	BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508, EN 574
• TÜV (German technical inspectorate) certificate	Yes
• UL-registration	Yes
• BG BIA certificate	Yes

### General Product Approval

### EMC

### Functional Safety / Safety of Machinery



CCC



CSA



UL



C-TICK



ATEX

### Declaration of Conformity

### Test Certificates

### other



EG-Konf.

[Special Test Certificate](#)

[Confirmation](#)

[Environmental Confirmations](#)

### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

#### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

#### Cax online generator:



<http://www.siemens.com/cax>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3TK2834-1AJ20/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3TK2834-1AJ20](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TK2834-1AJ20)

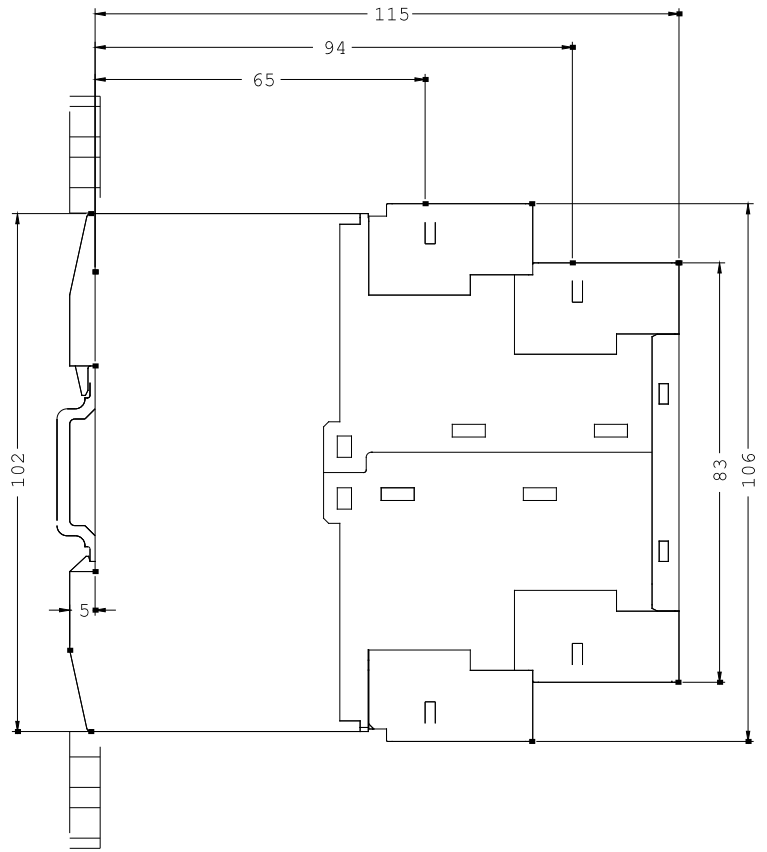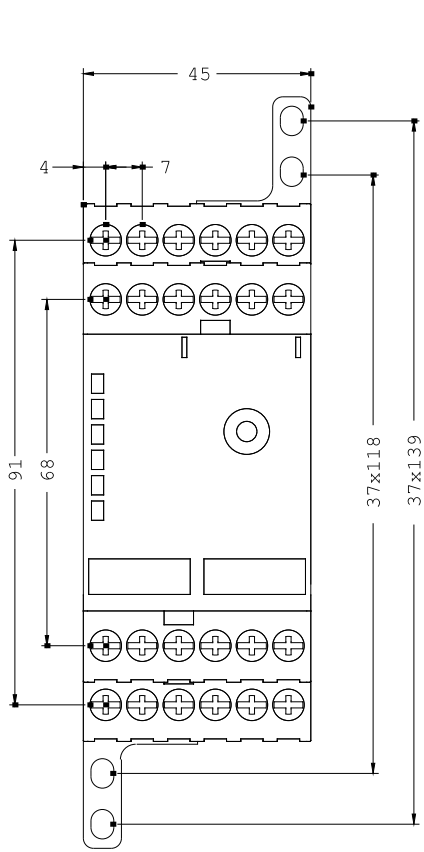

last change:

Jul 28, 2014