

Data sheet for three-phase Squirrel-Cage-Motors SIMOTICS

Motor type: **GP100** FS: **324T - 4p - 40 hp -**

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

Electrical data without

U [V]	Δ / Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]					LRC	Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque [lb-ft]	T _A /T _N LRT [%]	T _k /T _N BDT [%]
						4/4	3/4	1/2	0	4/4		3/4	2/4	4/4	3/4	2/4				
460	Δ	60	40.00	30.00	1,780	46.00	36.00	26.50	15.00	290.0	94.1	94.1	94.3	86.0	83.0	75.0	118.0	180	231	

Frame Type: 324T	Type of constr.: (A) Foot mounted - End shield	Ins. Cl.: Standard Class F Insulation	Motor Prot.: (A) Without Protection	NEMA Des.: B	S.F.: 1.15
Mtr. WT: 636		Temp. Rise Cl.: B	Amb. Temp.: + 40 to -20 °C @1000 m	kVA: G	I.P.: 55

Mechanical data

Sound level (SPL / SWL) at 60 Hz	64.0 dB(A) / 75.0 dB(A)		Thickener	Polyurea					
Octave Band Center Frequencies Hertz			Safe Stall Time Hot	22 s					
	250	500	1000	2000	4000	8000	Hz	Safe Stall Time Cold	45 s
SPL@3	52.0	59.0	59.0	57.0	53.0	50.0	dB(A)	Frame material	cast iron
Moment of inertia	9.3 Lb-ft ²		Color, paint shade	Standard Paint - RAL7030					
Ext Load Inertia Capability:	189.0 Lb ft ²		Coating (paint finish)	Standard Alkyed + Epoxy (C2)					
Bearings			Ventilation Type						
Bearing DE NDE	6312 Z C3 S0 6210 ZZ C3 S0		Method of cooling	TEFC					
Bearing_Type	Ball Bearing Ball Bearing		Direction of rotation	Bidirectional					
AFBMA:	60BC03JP30 50BC02JPP30		Fan Material	Polypropylen ESD					
Grease			VFD	CT: 4:1 VT: 20:1					
Capacity	5.50 oz 2.30 oz		Space heaters	without					
Grease Type:	Exxon Mobile EM		Brake:	without					

Terminal box

Lead Wire Connection	3 LEAD - DELTA				Terminal box position	(3) F-1, Standard Floor Mount, T. Box LHS
Voltage	L1	L1	L1	Connected together	Material of terminal box	Stamped Steel
----	----	----	----	----	Cable entry	2.5" NPT
----	T1	T2	T3	----		

Notes:
 I_L/I_N = locked rotor current / current nominal
 M_L/M_N = locked rotor torque / torque nominal
 M_L/M_N = break down torque / nominal torque
 3) Value is valid only for DOL operation with motor design IC411
 2) at rated power / at full load

responsible dep. DI MC LVM	technical reference	created by DT Configurator	approved by	<i>Technical data are subject to change! There may be discrepancies between software and hardware versions</i>
-------------------------------	---------------------	-------------------------------	-------------	--

	document type datasheet	document status released	customer	
	title 1LE2221-3AB11-2AA3-Z B09+F36	document number	rev.	creation date
© Siemens AG 2021		01	2021-04-22 07:39	language Page en 1/2


Data sheet for three-phase Squirrel-Cage-Motors SIMOTICS



Motor type: GP100 FS: 324T - 4p - 40 hp -

Special design

B09 Export packing sea freight - Siemens standard F36 Electrical duplicate - (routine test)

Notes:

responsible dep. DI MC LVM	technical reference	created by DT Configurator	approved by	<i>Technical data are subject to change! There may be discrepancies between software and hardware unless</i>	
	document type datasheet	document status released		customer	
	title 1LE2221-3AB11-2AA3-Z B09+F36	document number			
© Siemens AG 2021	rev. 01	creation date 2021-04-22 07:39	language en	Page 2/2	

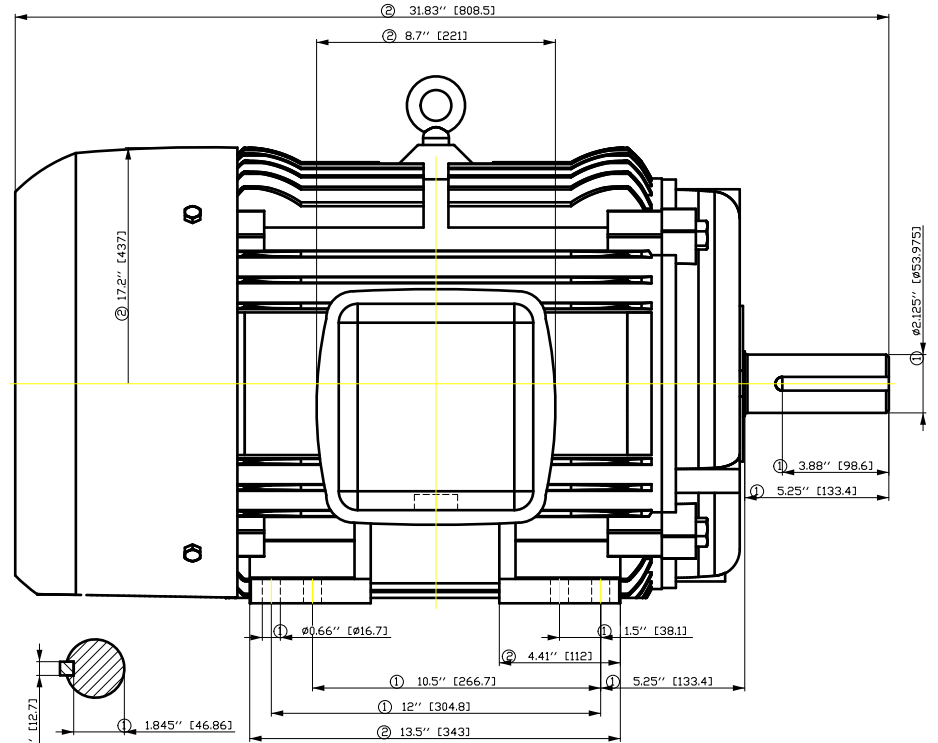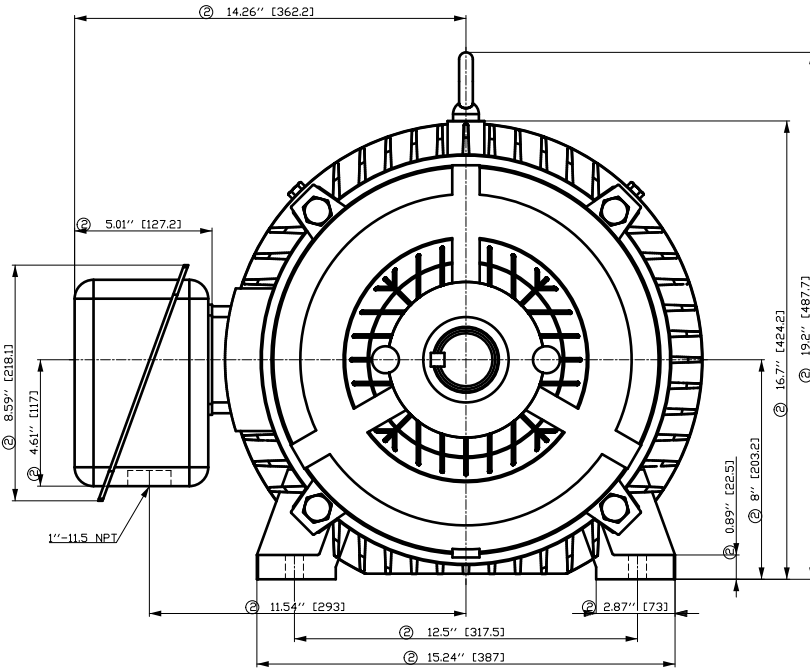

- ① Tolerances according to NEMA std.
- ② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GTB 19.
- ③ Not according to NEMA std.

Tolerance	Surface	Material	Weight	Scale
			E	{ {
FŠÖGGFß-ÖÖFFßÖÖH	Author	Öä \)•ä)ä/ä/ä ä*		
ÖÖEÖH	Creator	ÖVŠ		
	Approval	T ä: ä/ä/ä)*		
	Department			
	Change Order	MFB		Doc Type
	Doc State	ÖÖGGF		Paper Size
	Revision	Index RS		1st Language
				2nd Language
© Siemens AG	Project No	E	Ref No	E
2018				Sheet
				F of F

刀线
用
转
为
干
口
用
文
字
注
明
积
积
积
积

刀线
用
转
为
干
口
用
文
字
注
明
积
积
积
积

刀线
用
转
为
干
口
用
文
字
注
明
积
积
积
积


刀线
用
转
为
干
口
用
文
字
注
明
积
积
积
积

刀线
用
转
为
干
口
用
文
字
注
明
积
积
积
积

SIEMENS INDUSTRY, INC.


HP 40 VOLTS < 600V RPM 1800 TYPE GP100
HZ 60 PHASE 3 FRAME 324T NEMA B

TORQUE & CURRENT VS. SPEED

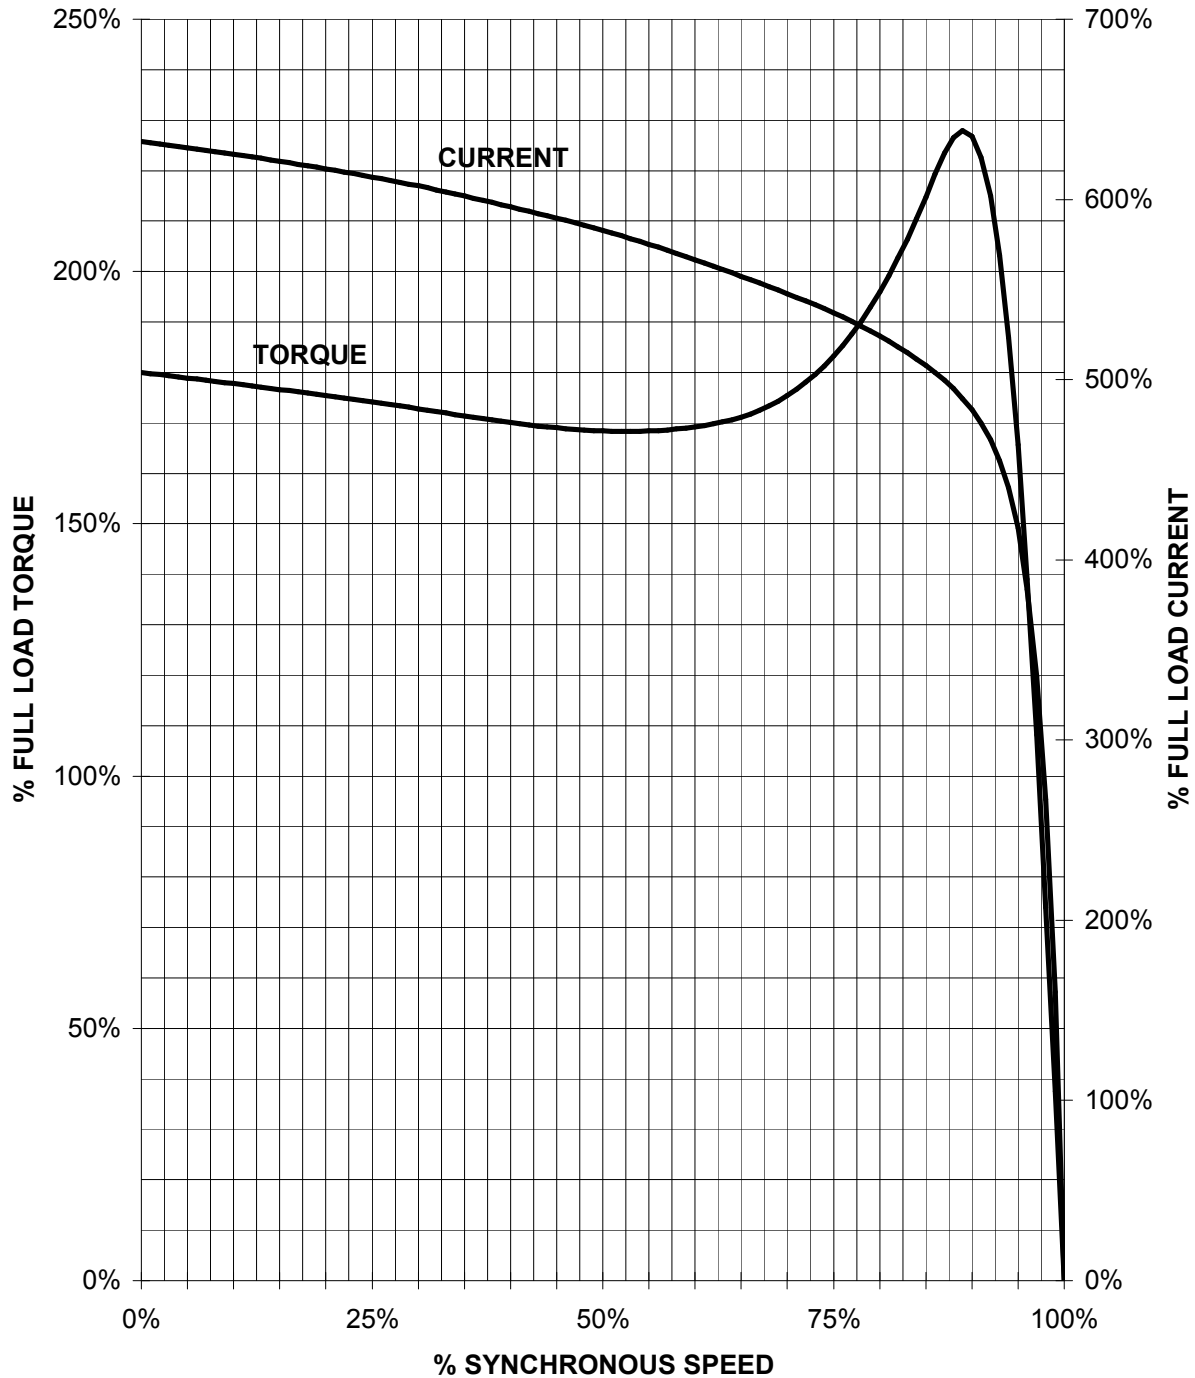

CUSTOMER: _____ ORDER#: _____

Main terminal diagram

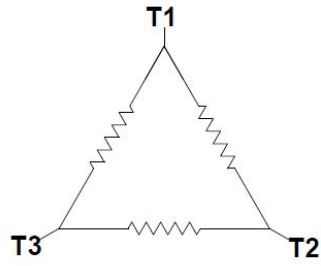

3 LEAD DELTA			
LINES			CONN.
L1	L2	L3	
T1	T2	T3	Δ

responsible dep.
DI MC LVM

technical reference

created by

approved by

Project

SIEMENS

document type
Wiring Diagram

document status
free

customer

title
1LE2221-3AB11-2AA3-Z
B09+F36

document number