

## SAIL-M8BG-4S10UIE

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

### General ordering data

Version	Bus line, One end without connector, M8, Number of poles: 4, 10 m, Female socket, straight, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No
Order No.	<a href="#">1301371000</a>
Type	SAIL-M8BG-4S10UIE
GTIN (EAN)	4050118111248
Qty.	1 pc(s).

Creation date March 23, 2021 3:00:46 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**SAIL-M8BG-4S10UIE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 350 g

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Technical specifications for cable**

Acceleration	5 m/s <sup>2</sup>	
Bending cycles	5 Mio	
Bending radius, min., moving	7.5 x cable diameter	
Bending radius, min., stationary	4 x cable diameter	
Cable length	10 m	
Colour coding	blue, orange, white / blue, white / orange	
Configurable cable length	No	
Core cross-section	0.15 mm <sup>2</sup>	
Halogen	No	
Housing main material	PUR	
Hybrid cable	No	
Insulation	PP	
Irradiation crosslinked	No	
Number of poles	4	
Number of poles	4	
Outer cladding in accordance with UL AWM style	20963 (80 °C / 30 V)	
Outer diameter	4.8 - 0.3 mm	
Outside diameter	Diameter	4.8 mm
	Signs	±
	Tolerance	0.3 mm
Outside diameter	4.8 mm ± 0.3 mm	
Resistant to welding beads	No	
Sheath material	PUR	
Sheathing colour	green	
Shielded	Yes	
Speed	180 m/min	
Suitable for cable carriers	Yes	
Temperature range, stationary	-40...80 °C	
Temperature range, stationary, max.	80 °C	
Temperature range, stationary, min.	-40 °C	

**General technical data**

Coding	none	Connection thread	M8
Contact surface	Gold-plated	Housing main material	PUR
Insulation strength	10 <sup>8</sup> Ω	LED	No
Plugging cycles	≥ 100	Pollution severity	3
Protection degree	IP67	Rated current	4 A
Rated voltage	30 V	Temperature range of housing	-25...+80 °C
Threaded ring material	Brass, nickel-plated	Tightening torque	M8: 0.5 - 0.6 Nm
Version	Female socket, straight	jumpered	No

**Electrical properties**Insulation strength 10<sup>8</sup> Ω      Rated voltage 30 V

Creation date March 23, 2021 3:00:46 PM CET

**SAIL-M8BG-4S10UIE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****General standards**

Certificate no. (cULus) E307231

**Cable structure**

Colour coding	blue, orange, white / blue, white / orange	Insulation	PP
Sheathing colour	green		

**Electrical properties of cable**

Insulation strength	10 <sup>8</sup> Ω	Rated current	4 A
Speed	180 m/min		

**Mechanical and material properties of cable**

Acceleration	5 m/s <sup>2</sup>	Bending cycles	5 Mio
Halogen	No	Speed	180 m/min

**Plug, right**

Contact surface	Gold-plated	Housing main material	PUR
Plugging cycles	≥ 100		

**Classifications**

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E307231

**Downloads**Engineering Data [EPLAN, WSCAD](#)


**SAIL-M8BG-4S10UIE**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com


**Drawings**

**Dimensioned drawing**

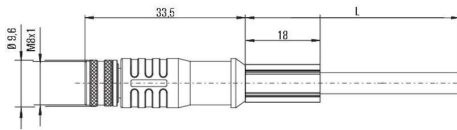


Pin

**Pole scheme**

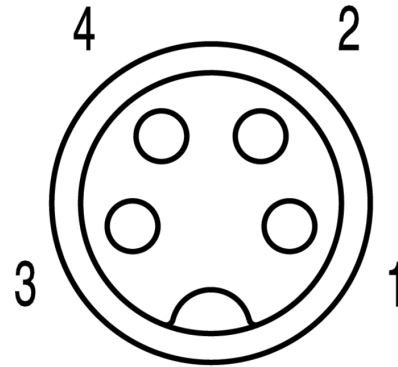

Socket

**Wiring diagram**

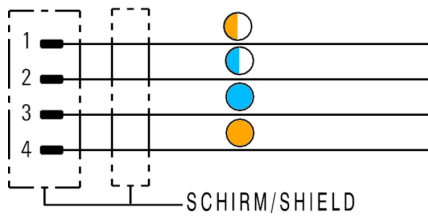

**The ideal tool: Screwty<sup>®</sup> with torque function**



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F