


## SV 7.62HP/04/90MF3 3.5SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

### Product image

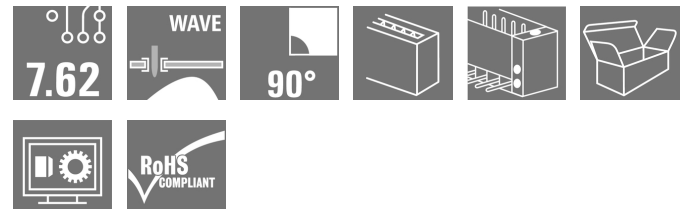

Similar to illustration

90° male header with middle flange with a 7.62 pitch.  
 Meets the requirements of IEC 61800-5-1 and enables  
 UL approval as per UL840 600 V.

Without a female header, the mating profile guarantees  
 minimum touch safety of >3 mm with 20 N pressure on  
 the test finger.

The automatically locking middle flange which can  
 optionally also be screwed, reduces space requirements  
 by one pitch width in comparison with conventional  
 solutions.

On request: available with screw flange or without flange.

### General ordering data

|              |   |
|--------------|---|
| Version      | PCB plug-in connector, male header, closed side,<br>Middle flange, THT solder connection, 7.62 mm,<br>Number of poles: 4, 90°, Solder pin length (l): 3.5<br>mm, tinned, black, Box |
| Order No.    | <a href="#">1048570000</a>  |
| Type         | SV 7.62HP/04/90MF3 3.5SN BK BX  |
| GTIN (EAN)   | 4032248786459   |
| Qty.         | 48 pc(s).   |
| Product data | IEC: 1000 V / 57 A<br>UL: 300 V / 40.5 A  |
| Packaging    | Box   |

Creation date March 22, 2021 8:53:19 PM CET

## SV 7.62HP/04/90MF3 3.5SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |         |                 |            |
|--------------------------|---------|-----------------|------------|
| Depth                    | 28.3 mm | Depth (inches)  | 1.114 inch |
| Height                   | 14.9 mm | Height (inches) | 0.587 inch |
| Height of lowest version | 11.4 mm | Net weight      | 10.08 g    |

## System specifications

|   |   |   |   |
|---|---|---|---|
| Product family                                | OMNIMATE Power - series<br>BV/SV 7.62HP | Type of connection                              | Board connection                              |
| Mounting onto the PCB                         | THT solder connection                   | Pitch in mm (P)                                 | 7.62 mm                                       |
| Pitch in inches (P)                           | 0.3 inch                                | Outgoing elbow                                  | 90°   |
| Number of poles                               | 4                                       | Number of solder pins per pole                  | 2   |
| Solder pin length (l)                         | 3.5 mm                                  | Solder pin length tolerance                     | +0.1 / -0.3 mm                                |
| Solder pin dimensions                         | 0.8 x 1.0 mm                            | Solder eyelet hole diameter (D)                 | 1.3 mm  |
| Solder eyelet hole diameter tolerance (D)     | +0,1 mm                                 | L1 in mm  | 30.48 mm                                      |
| L1 in inches                                  | 1.2 inch                                | Number of rows                                  | 1   |
| Pin series quantity                           | 1                                       | Touch-safe protection acc. to DIN VDE<br>57 106 | Touch-safe above the<br>printed circuit board |
| Touch-safe protection acc. to DIN VDE<br>0470 | IP 20                                   | Volume resistance                               | 2.00 mΩ                                       |
| Can be coded                                  | Yes                                     |   |   |

## Material data

|                                       |                                   |                                       |        |
|---------------------------------------|-----------------------------------|---------------------------------------|--------|
| Insulating material                   | PA GF                             | Colour                                | black  |
| Colour chart (similar)                | RAL 9011                          | Insulating material group             | II     |
| Comparative Tracking Index (CTI)      | ≥ 500                             | UL 94 flammability rating             | V-0    |
| Contact material                      | Copper alloy                      | Contact surface                       | tinned |
| Layer structure of solder connection  | 1...3 μm Ni / 4...6 μm Sn<br>matt | Storage temperature, min.             | -40 °C |
| Storage temperature, max.             | 70 °C                             | Operating temperature, min.           | -50 °C |
| Operating temperature, max.           | 130 °C                            | Temperature range, installation, min. | -25 °C |
| Temperature range, installation, max. | 130 °C                            |                                       |        |

## Rated data acc. to IEC

|  |                        |  |                   |
|--|------------------------|--|-------------------|
| tested acc. to standard  | IEC 60664-1, IEC 61984 | Rated current, min. number of poles<br>(Tu=20°C)                         | 57 A              |
| Rated current, max. number of poles<br>(Tu=20°C)                             | 41 A                   | Rated current, min. number of poles<br>(Tu=40°C)                         | 41 A              |
| Rated current, max. number of poles<br>(Tu=40°C)                             | 41 A                   | Rated voltage for surge voltage class /<br>pollution degree II/2         | 1,000 V           |
| Rated voltage for surge voltage class /<br>pollution degree III/2            | 630 V                  | Rated voltage for surge voltage class /<br>pollution degree III/3        | 630 V             |
| Rated impulse voltage for surge voltage<br>class/ pollution degree II/2      | 6 kV                   | Rated impulse voltage for surge voltage<br>class/ pollution degree III/2 | 6 kV              |
| Rated impulse voltage for surge voltage<br>class/ contamination degree III/3 | 6 kV                   | Short-time withstand current resistance                                  | 3 x 1s with 420 A |

## SV 7.62HP/04/90MF3 3.5SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to CSA

Institute (CSA)



Certificate No. (CSA)

200039-1121690

|                                   |       |
|-----------------------------------|-------|
| Rated voltage (Use group B / CSA) | 300 V |
| Rated voltage (Use group D / CSA) | 600 V |
| Rated current (Use group C / CSA) | 35 A  |

|                                   |       |
|-----------------------------------|-------|
| Rated voltage (Use group C / CSA) | 300 V |
| Rated current (Use group B / CSA) | 35 A  |
| Rated current (Use group D / CSA) | 5 A   |

Reference to approval values

Specifications are maximum values, details - see approval certificate.

## Rated data acc. to UL 1059

Institute (cURus)



Certificate No. (cURus)

E60693

|                                       |        |
|---------------------------------------|--------|
| Rated voltage (Use group B / UL 1059) | 300 V  |
| Rated voltage (Use group D / UL 1059) | 600 V  |
| Rated current (Use group C / UL 1059) | 40.5 A |

|                                       |        |
|---------------------------------------|--------|
| Rated voltage (Use group C / UL 1059) | 300 V  |
| Rated current (Use group B / UL 1059) | 40.5 A |
| Rated current (Use group D / UL 1059) | 5 A    |

|                          |        |
|--------------------------|--------|
| Clearance distance, min. | 6.9 mm |
|--------------------------|--------|

|                         |        |
|-------------------------|--------|
| Creepage distance, min. | 9.6 mm |
|-------------------------|--------|

Reference to approval values

Specifications are maximum values, details - see approval certificate.

## Packing

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 35 mm  |
| VPE width | 135 mm | VPE height | 350 mm |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002637    | ETIM 7.0    | EC002637    |
| ECLASS 9.0  | 27-44-04-02 | ECLASS 9.1  | 27-44-04-02 |
| ECLASS 10.0 | 27-44-04-02 | ECLASS 11.0 | 27-46-02-01 |

## Important note

IPC conformity

Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

Notes

- Additional colours on request
- Rated current related to rated cross-section & min. No. of poles.
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- MFX and MSFX: X= Position of the middle flange e.g. MF2, MSF3
- Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

**Data sheet****SV 7.62HP/04/90MF3 3.5SN BK BX****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

**Technical data****Approvals**

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E60693  |

**Downloads**

|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a> |
| Engineering Data                            | <a href="#">STEP</a>                            |
| Engineering Data                            | <a href="#">EPLAN, WSCAD</a>                    |


**SV 7.62HP/04/90MF3 3.5SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Drawings**

**Dimensional drawing**

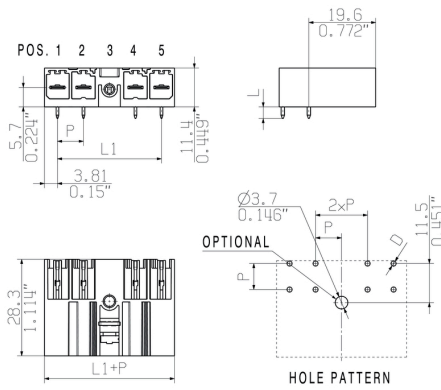

|                |                                  |   |   |   |   |   |   |   |
|----------------|----------------------------------|---|---|---|---|---|---|---|
| 6              | M(S)F6                           | o | o | o | o | o | X | o |
| 6              | M(S)F5                           | o | o | o | o | X | o | o |
| 6              | M(S)F4                           | o | o | o | X | o | o | o |
| 6              | M(S)F3                           | o | o | X | o | o | o | o |
| 6              | M(S)F2                           | o | X | o | o | o | o | o |
| 5              | M(S)F5                           | o | o | o | o | X | o |   |
| 5              | M(S)F4                           | o | o | o | X | o | o |   |
| 5              | M(S)F3                           | o | o | X | o | o | o |   |
| 5              | M(S)F2                           | o | X | o | o | o | o |   |
| 4              | M(S)F4                           | o | o | o | X | o |   |   |
| 4              | M(S)F3                           | o | o | X | o | o |   |   |
| 4              | M(S)F2                           | o | X | o | o | o |   |   |
| 3              | M(S)F3                           | o | o | X | o |   |   |   |
| 3              | M(S)F2                           | o | X | o | o |   |   |   |
| 2              | M(S)F2                           | o | X | o |   |   |   |   |
| NO OF<br>POLES | X = MIDDLE<br>FLANGE<br>POSITION | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|                |                                  |   |   |   |   |   |   |   |



## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
 Klängenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.