SIEMENS

Product data sheet 5TE1240



DISCONNECTOR, 92MM 200A 2POLE TRANSPARENT

Similar to image

Technical data:		
Number of poles		2
Design of the operating mechanism		selector switch
Product equipment / interlock		No
Continuous current / rated value	Α	200
Acceptability for application / emergency stop switch		No
Type from device		other
Design of the electrical connection / for main current circuit		screw-type terminals
Number of NC contacts / for auxiliary contacts		0
Acceptability for application / safety cut-out switch		No
Type of the driving mechanism / motor drive		No
Number of NO contacts / for auxiliary contacts		2
Number of change-over switches / for auxiliary contacts		0
Operating voltage / at 50/60 Hz / for AC / rated value	V	690
Service power / at AC 23 A / at 400 V / at 50/60 Hz / rated value	kW	88
Protection class IP		IP20
Acceptability for application / main switch		No
Acceptability for application / switch disconnector		Yes
Product extension / optional / motor drive		No

Product extension / optional / voltage trigger	No
Type of fixing / 4-hole front mounting	No
Type of fixing / central front mounting	No
Suitability for integration / distribution board	Yes
Acceptability for application / maintenance/repair switch	Yes

Certificates/approvals:

General Product Approval

Declaration of Conformity

Environmental







Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/5TE1240/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE1240

CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

Datanorm GAEB81 GAEB83 RTF TXT

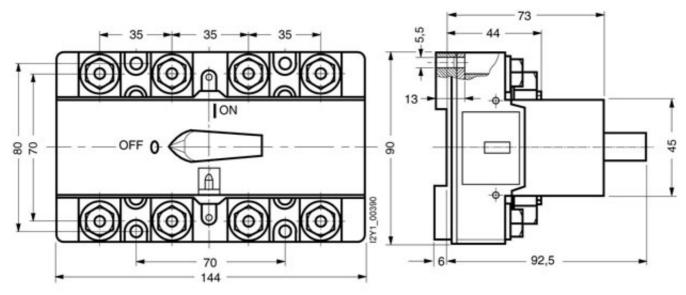

last change: Nov 5, 2012