## SIEMENS

## Product data sheet

5TE1430




DISCONNECTOR, 92MM 160A 4POLE TRANSPARENT

Similar to image

Technical data:				
Number of poles		4		
Design of the operating mechanism		selector switch		
Product equipment / interlock		No		
Continuous current / rated value	А	160		
Acceptability for application / emergency stop switch		No		
Type from device		other		
Design of the electrical connection / for main current circuit		screw-type terminals		
Number of NC contacts / for auxiliary contacts		0		
Acceptability for application / safety cut-out switch		No		
Type of the driving mechanism / motor drive		No		
Number of NO contacts / for auxiliary contacts		4		
Number of change-over switches / for auxiliary contacts		0		
Operating voltage / at 50/60 Hz / for AC / rated value	V	690		
Service power / at AC 23 A / at 400 V / at 50/60 Hz / rated value	kW	69		
Protection class IP		IP20		
Acceptability for application / main switch		No		
Acceptability for application / switch disconnector		Yes		
Product extension / optional / motor drive		No		

Product extension / optional / voltage trigger		No	
Type of fixing / 4-hole front mounting		No	
Type of fixing / central front mounting		No	
Suitability for integration / distribution board		Yes	
Acceptability for application / maintenance/repair switch		Yes	
Certificates/approvals:			
General Product Approval	Declaration Conformity	of	other
GOST KEMA	EG-Konf.		Environmental Confirmations
Further information: Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall			
Service&Support (Manuals, Certificates, Characteristics, FAQs http://support.automation.siemens.com/WW/view/en/5TE1430/all	;,)		
Image database (product images, 2D dimension drawings, 3D i http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE		rcuit dia	agrams,)
CAx-Online-Generator http://www.siemens.com/cax			
Tender specifications Datanorm GAEB81 GAEB83 RTF TXT			
		5,5	

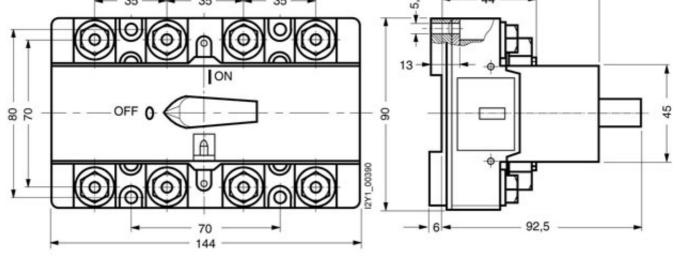

last change:

Nov 5, 2012