



SENTRON PAC3200;  
 LCD;  
 96X96MM POWER MONITORING DEVICE PANEL MOUNT  
 TYPE FOR MEASUREMENT OF ELECTR. VALUES VAUX:  
 110-340VDC / 95-240VAC VIN: MAX.690/400V;  
 45-65HZ AMPIN: X/1A OR X/5A AC COMPRESSION TYPE  
 TERMINALS

Similar to image

**General technical data:**

|   |   |            |
|---|---|------------|
| <b>Product designation</b>  |   | multimeter |
| <b>product brand name</b>   |   | SENTRON    |
| <b>Product-type designation</b>   |   | PAC3200    |
| <b>Size of multimeter / company-specific</b>                                    |   | size 96    |
| <b>Design of the product</b>  |   | basic      |
| <b>Product function</b>   |   |            |
| • voltage measurement   |   | Yes        |
| • current measurement   |   | Yes        |
| • active power measurement  |   | Yes        |
| • reactive power measurement  |   | Yes        |
| • pulse measurement   |   | Yes        |
| • frequency measurement   |   | Yes        |
| <b>MTBF</b>   | a | 185.8      |
| <b>Reference code</b>   |   |            |
| • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 |   | P          |
| • according to DIN EN 61346-2   |   | P          |

**Measurement:**

|  |    |                         |
|--|----|-------------------------|
| <b>Measuring method</b>  |    | RMS                     |
| <ul style="list-style-type: none"> <li>• for voltage measurement</li> <li>• for current measurement</li> </ul>                         |    | TRMS                    |
| <b>Type of measured value detection</b>  |    | complete                |
| <b>Curve form of the voltage</b>   |    | Sinusoidal or distorted |
| <b>Measurable line frequency</b>   | Hz | 45 ... 65               |
| <b>Operating mode for measured value detection</b>   |    |                         |
| <ul style="list-style-type: none"> <li>• automatic line frequency detection</li> <li>• set at 50 Hz</li> <li>• set to 60 Hz</li> </ul> |    | Yes<br>No<br>No         |

#### Measuring inputs for voltage:

|  |                  |  |
|--|------------------|--|
| <b>Measurable supply voltage</b>   |                  |  |
| <ul style="list-style-type: none"> <li>• between (PE)N and L / for AC / maximum nominal value</li> <li>• between the outer conductors / for AC / maximum nominal value</li> <li>• between (PE)N and L / for AC</li> <li>• between the outer conductors / for AC</li> </ul> | V<br>V<br>V<br>V | 400<br>690<br>40 ... 480<br>70 ... 831 |
| <b>Supply voltage / between the outer conductors / for AC</b>  |                  |  |
| <ul style="list-style-type: none"> <li>• maximum permissible</li> </ul>  | V                | 831                                    |
| <b>Measuring category / for voltage measurement</b>  |                  | CATIII                                 |
| <b>Outer conductors and neutral conductors internal resistance</b>   |                  |  |
| <ul style="list-style-type: none"> <li>• for voltage measurement</li> </ul>  | MΩ               | 1.05                                   |
| <b>Power consumption / for voltage measurement</b>   |                  |  |
| <ul style="list-style-type: none"> <li>• per phase</li> </ul>  | mW               | 220                                    |
| <b>Measuring range extension for voltages</b>  |                  |  |
| <ul style="list-style-type: none"> <li>• with external voltage transformers</li> </ul>   |                  | Yes                                    |

#### Measuring inputs for current:

|  |        |              |
|--|--------|--------------|
| <b>Measurable current</b>  |        |              |
| <ul style="list-style-type: none"> <li>• 1 / for AC / nominal value</li> <li>• 2 / for AC / nominal value</li> </ul> | A<br>A | 1<br>5       |
| <b>Relative measurable current / for AC</b>  | %      | 1 ... 120    |
| <b>Continuous current / for AC / maximum permissible</b>   | A      | 10           |
| <b>Short-time current resistance (I<sub>cw</sub>) / limited to 1 s / rated value</b>                                 | A      | 100          |
| <b>Zero-point suppression / for current measurement</b>  |        | 0,1 ... 10 % |
| <b>Measuring category / for current measurement</b>  |        | CATIII       |
| <b>Measuring range extension for currents</b>  |        |              |
| <ul style="list-style-type: none"> <li>• with external current transformers</li> </ul>                               |        | Yes          |

#### Fault limits:

|   |  |                                     |
|---|--|-------------------------------------|
| <b>Reference condition / for metering precision</b> |  | Acc. to IEC62053-22 and IEC62053-23 |
|---|--|-------------------------------------|

|  |  |   |
|--|--|---|
| <b>Formula for relative total measurement inaccuracy</b> |  |   |
| • for measured variable voltage                          |  | +/- 0,3 %   |
| • for measured variable current                          |  | +/- 0,2 %   |
| • for measured variable output                           |  | +/- 0,5 %   |
| • for measured variable output factor                    |  | +/- 0,5 %   |
| • for measured variable active energy                    |  | Cl. 0.5 acc. to... IEC62053-22                      |
| • for measured variable reactive energy                  |  | Class 2 according to IEC61557-12 and/or IEC62053-23 |

|   |     |                         |
|---|-----|-------------------------|
| <b>Supply voltage:</b>  |     |                         |
| <b>Design of the power supply</b>                             |     | Wide-range power supply |
| <b>Type of / supply voltage</b>                               |     | AC/DC                   |
| <b>Relative symmetrical tolerance / of the supply voltage</b> | %   | 10                      |
| <b>Measuring category / supply voltage</b>                    |     | CATIII                  |
| <b>Supply voltage / 1 / with AC</b>                           | V   | 95 ... 240              |
| <b>Apparent power consumption</b>                             |     |                         |
| • without expansion module(s) / typical                       | V·A | 6                       |
| • with expansion module(s) / maximum                          | V·A | 8                       |
| <b>Supply voltage / 1 / for DC</b>                            | V   | 110 ... 340             |

|  |    |    |
|--|----|----|
| <b>Digital input:</b>                            |    |    |
| <b>Number of digital inputs</b>                  |    | 1  |
| <b>Input voltage / at the digital input</b>      |    |    |
| • for DC / rated value                           | V  | 24 |
| • final value for signal<1>-recognition          | V  | 8  |
| • initial value for signal<1>-recognition        | V  | 13 |
| <b>Input current / at the digital input</b>      |    |    |
| • for signal <1>                                 | mA | 7  |
| <b>Initial delay time / at the digital input</b> |    |    |
| • for signal <1> after <0> / maximum             | ms | 5  |
| • for signal <0> after <1> / maximum             | ms | 5  |

|   |    |                                    |
|---|----|------------------------------------|
| <b>Digital output:</b>  |    |                                    |
| <b>Number of digital outputs</b>  |    | 1                                  |
| <b>Design of digital outputs</b>  |    | switching or pulse output function |
| <b>Norm / for impulse equipment</b>   |    | according to IEC62053-31           |
| <b>Pulse duration</b>   | ms | 30 ... 500                         |
| <b>Adjustable time period / minimum</b>                                     | ms | 10                                 |
| <b>Operating voltage / as output voltage / for DC / maximum permissible</b> | V  | 30                                 |
| <b>Output current</b>   |    |                                    |
| • at the digital output   |    |                                    |

|  |      |       |
|--|------|-------|
| <ul style="list-style-type: none"> <li>• for signal &lt;1&gt;</li> <li>• at signal &lt;0&gt; / maximum</li> <li>• at the digital outputs / for DC / maximum</li> </ul> | / mA | 27    |
|  | mA   | 0.2   |
|  | mA   | 100   |
| <b>Output delay time / at the digital output</b>   |      |       |
| <ul style="list-style-type: none"> <li>• for signal &lt;1&gt; after &lt;0&gt; / maximum</li> <li>• for signal after &lt;0&gt; after &lt;1&gt; / maximum</li> </ul>     | ms   | 5     |
|  | ms   | 5     |
| <b>Internal resistance / at the digital outputs</b>  | Ω    | 55    |
| <b>Switching frequency / at the digital output / maximum</b>   | Hz   | 17    |
| <b>Characteristic feature of the output / short-circuit protected</b>  |      | Yes   |
| <b>Measuring category / for digital signals</b>  |      | CATII |

#### Communication:

|  |        |                                      |
|--|--------|--------------------------------------|
| <b>Number of interfaces / compliant with fast Ethernet</b>                         |        | 1                                    |
| <b>Design of the electrical connection</b>   |        |                                      |
| <ul style="list-style-type: none"> <li>• of the fast Ethernet interface</li> </ul> |        | RJ45 (8P8C)                          |
| <b>Design of cable / connectable</b>   |        |                                      |
| <ul style="list-style-type: none"> <li>• Twisted Pair</li> </ul>                   |        | Yes                                  |
| <b>Protocol / at the Ethernet interface / is supported</b>                         |        | MODBUS TCP                           |
| <b>protocol / is supported</b>   |        | SEABus TCP / MODBUS TCP (switchable) |
| <b>Transfer rate</b>   | kbit/s | 10,000 ... 10,000                    |
| <b>Updating time</b>   |        |                                      |
| <ul style="list-style-type: none"> <li>• at the interface</li> </ul>               | s      | 0.33 ... 1                           |

#### Indication and operation:

|   |    |                                      |
|---|----|--------------------------------------|
| <b>Number of keys</b>                                     |    | 4                                    |
| <b>Design of the display</b>                              |    | LCD, graphical, monochrome           |
| <b>Color / of the background of the display</b>           |    | white                                |
| <b>National language / for the display / is supported</b> |    | ger, en, fr, spa, ita, por, tur, chi |
| <b>Horizontal image resolution</b>                        |    | 128                                  |
| <b>Vertical screen resolution</b>                         |    | 96                                   |
| <b>Width / of the display</b>                             | mm | 72                                   |
| <b>Height / of the display</b>                            | mm | 54                                   |
| <b>Updating time / on display</b>                         | s  | 0.33 ... 3                           |

#### Connection elements and terminals:

|   |  |   |
|---|--|---|
| <b>Type of connectable conductor cross section / at the measurement inputs for voltage</b>  |  |   |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded / with wire end processing</li> <li>• for AWG conductors / solid</li> </ul> |  | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x 20 to 14 |

|   |  |  |
|---|--|--|
| <b>Type of connectable conductor cross section / at the measurement inputs for current</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded / with wire end processing</li> <li>• for AWG conductors / solid</li> </ul>  |  | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x 20 to 14  |
| <b>Type of connectable conductor cross section</b> <ul style="list-style-type: none"> <li>• at the inputs for supply voltage <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded / with wire end processing</li> <li>• for AWG conductors / solid</li> </ul> </li> <li>• at the digital inputs / solid</li> </ul> |  | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2 (0.5 ... 1.5 mm <sup>2</sup> )<br>2x 20 to 14<br>1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> ) |
| <b>Type of connectable conductor cross section</b> <ul style="list-style-type: none"> <li>• at the digital inputs / finely stranded / with wire end processing</li> <li>• at the digital inputs / for AWG conductors / solid</li> </ul>   |  | 1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> )<br>2x 24 ... 18   |
| <b>Type of connectable conductor cross section / at the digital outputs</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded / with wire end processing</li> <li>• for AWG conductors / solid</li> </ul>   |  | 1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> )<br>1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> )<br>2x 24 ... 18   |

#### Dimensions and weights:

|                                       |    |   |
|---------------------------------------|----|---|
| <b>Suitability for installation</b>   |    | Installation in stationary control panels in closed rooms |
| <b>Mounting type / panel mounting</b> |    | Yes   |
| <b>mounting position</b>              |    | vertical  |
| <b>Width</b>                          | mm | 96  |
| <b>Height</b>                         | mm | 96  |
| <b>Depth</b>                          | mm | 56  |
| <b>Mounting depth</b>                 | mm | 51  |
| <b>Cutout height</b>                  | mm | 92  |
| <b>Cutout width</b>                   | mm | 92  |

#### Degree of protection and safety class:

|  |  |              |
|--|--|--------------|
| <b>Operating resource protection class</b> <ul style="list-style-type: none"> <li>• when installed</li> </ul>    |  | II           |
| <b>Protection class IP</b> <ul style="list-style-type: none"> <li>• on the front</li> <li>• rear side</li> </ul> |  | IP65<br>IP20 |

#### Ambient conditions:

|   |    |                            |
|---|----|----------------------------|
| <b>Ambient temperature</b> <ul style="list-style-type: none"> <li>• during operating</li> <li>• during storage</li> </ul> | °C | -10 ... +55<br>-25 ... +70 |
|---|----|----------------------------|

|   |   |                |
|---|---|----------------|
| <b>Relative humidity / at 25 °C / without condensation</b>          |   |                |
| • during the operating phase  | % | 5 ... 95       |
| <b>Installation altitude / at a height over sea level / maximum</b> | m | 2,000          |
| <b>Norm</b>   |   |                |
| • for environmental coldness check                                  |   | IEC 60068-2-1  |
| • for environmental dry heat check                                  |   | IEC 60068-2-2  |
| • for cyclic, environmental damp heat check                         |   | IEC 60068-2-30 |

#### Certificates/approvals:

##### Verification of suitability

- as EC declaration of conformity
- as authorisation for USA
- as authorisation for Canada

IEC 61010-1: 2001 (2nd Ed.) with Corr. 1, EN 61010-1: 2001 (2nd Ed.) and DIN EN 61010-1:2002 with "Berichtigung 1"

UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04

UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04

#### Certificates/approvals:

##### General Product Approval



##### other

[Confirmation](#)



[PROFINET-Certification](#)

Profibus

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM2112-0BA00-3AA0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/7KM2112-0BA00-3AA0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=7KM2112-0BA00-3AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM2112-0BA00-3AA0)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

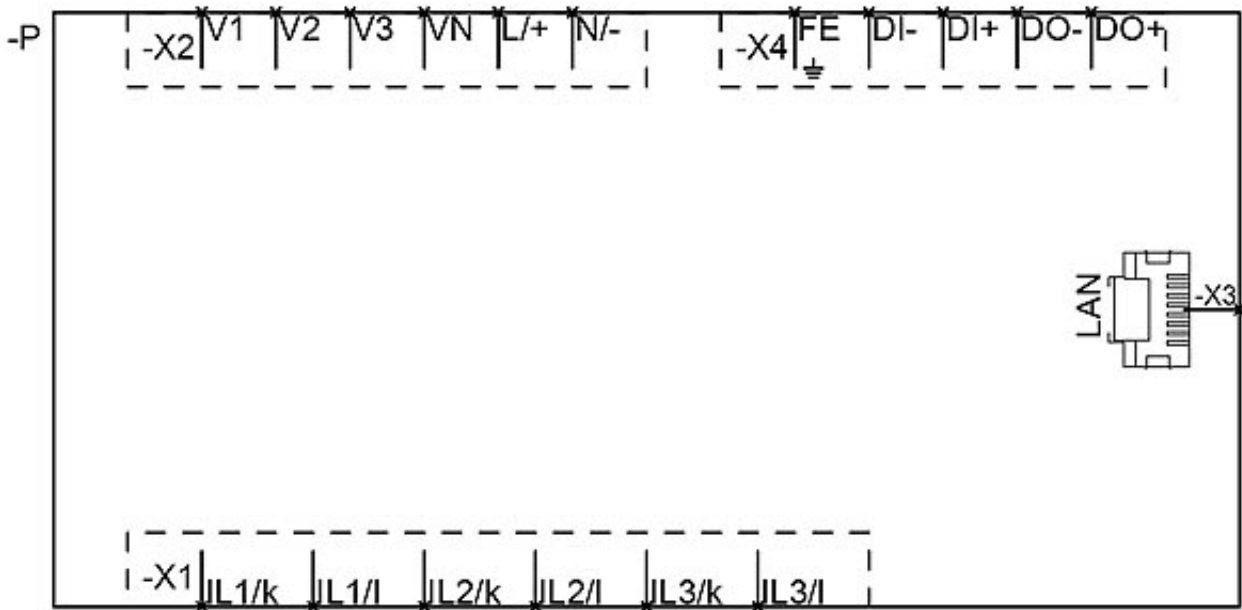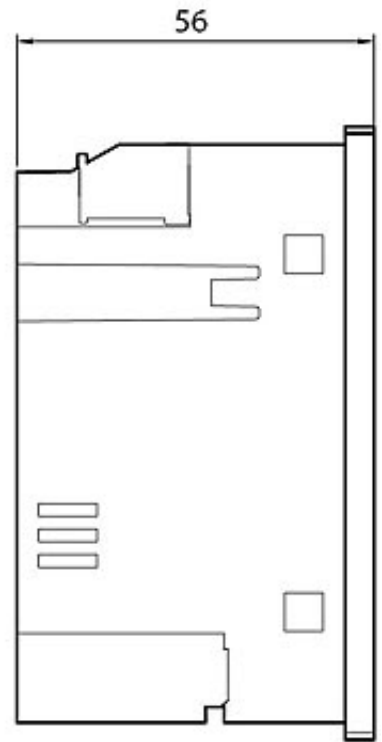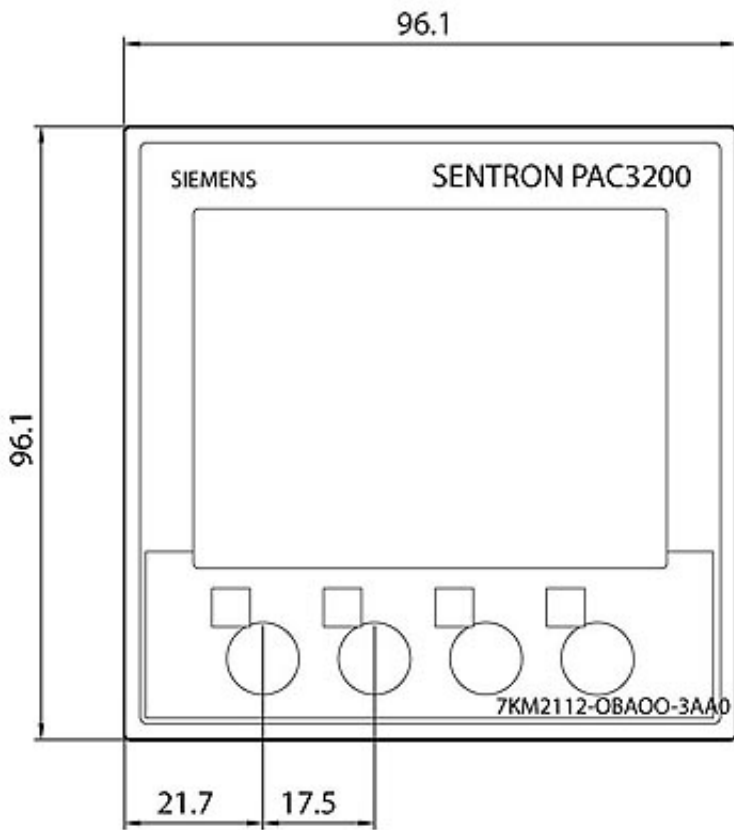

last change:

Jun 16,  
2014