

## SFX 10/60 S MC SDR

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



Similar to illustration

SlimFix X are halogen-free conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. SlimFix is an acknowledged and approved marker type in traffic engineering. The SF tool allows easy installation even in case of small markers.

- Halogen-free material
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.



### General ordering data

Version	SlimFix X. Conductor and cable markers, 7 - 40 mm, {Reference (AttributeDefinition) not found: pAttr74196859207437}, To customer specification
Order No.	<a href="#">1248750000</a>
Type	SFX 10/60 S MC SDR
GTIN (EAN)	4050118039108
Qty.	10 pc(s).
compatible printer	<a href="#">2715590000</a> <a href="#">2438520000</a> <a href="#">2438510000</a>

## SFX 10/60 S MC SDR

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	1 mm	Depth (inches)	0.039 inch
Height	60 mm	Height (inches)	2.362 inch
Net weight	1.6 g	Width	13.62 mm
Width (inches)	0.536 inch		

## Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

## General data

Advice label	Colour based on customer requirements (Please send M-Print PRO file)	Colour	To customer specification
Halogen	No	Material	Polyamide 66
Number of markers per combination	1 MultiCard = Conductor and cable markers	Operating temperature range	-40...100 °C
Operating temperature range, max.	100 °C	Operating temperature range, min.	-40 °C
Printed characters	Based on customer requirements (Please send M-Print PRO file)	Size of labelling field	60 x 9.5 mm
UL 94 flammability rating	V-2	Version	Installation with cable ties
Width	13.62 mm		

## Conductor and cable markers

Conductor O.D.	7 - 40 mm	Conductor O.D., max.	40 mm
Conductor O.D., min.	7 mm	Conductor cross-section, max.	500 mm <sup>2</sup>
Conductor cross-section, min.	16 mm <sup>2</sup>	Cross-section for connected wire	16 - 500 mm <sup>2</sup>
Halogen	No		

## Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02

## Approvals

ROHS	Conform
------	---------

## Downloads

Engineering Data	<a href="#">EPLAN, WSCAD</a>
------------------	------------------------------

**Data sheet**


**SFX 10/60 S MC SDR**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Example of use**

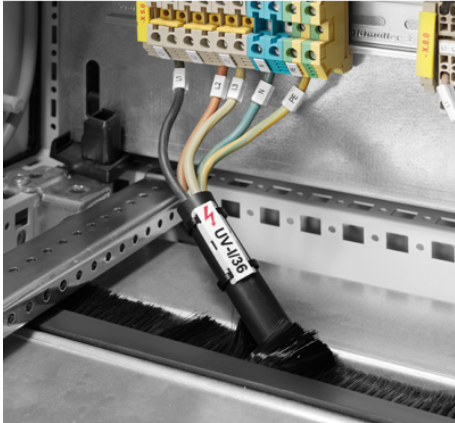

Similar to illustration