

IE-BS-V01P-RJ45-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Bayonet plug-in connector sets according to IEC
61076-3-106 ver.1 (EtherNet/IP), RJ45 plastic insert incl.
RJ45 insert

General ordering data

Version	Flange RJ45, IP67, Variant 1 plastic, RJ45 / RJ45 coupling, Cat.6 _A / Class E _A (ISO/IEC 11801 2010)
Order No.	1012370000
Type	IE-BS-V01P-RJ45-C
GTIN (EAN)	4032248720026
Qty.	10 pc(s).

Creation date March 22, 2021 1:18:00 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

IE-BS-V01P-RJ45-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 34.2 g

Temperatures

Operating temperature -40 °C...70 °C

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

General data

Connection 1	RJ45	Connection 2	RJ45
Description of article	Variant 1 plastic, RJ45 / RJ45 coupling	Seal material	NBR
Housing main material	PA UL 94 V0	Category	Cat.6 _A / Class E _A (ISO/IEC 11801 2010)
Contact surface	Gold over nickel	Shielding	360° all-round enclosure
Protection degree	IP67	Plugging cycles	750

General standards

Certificate no. (cULus)	E316369	Connector standard	IEC 61076-3-106 Var. 1, IEC 60603-7-5 1
-------------------------	---------	--------------------	---

Classifications

ETIM 6.0	EC001121	ETIM 7.0	EC001121
ECLASS 9.0	27-44-03-90	ECLASS 9.1	27-44-03-90
ECLASS 10.0	27-44-03-90	ECLASS 11.0	27-44-03-90

Approvals

Approvals



ROHS	Conform
UL File Number Search	E316369

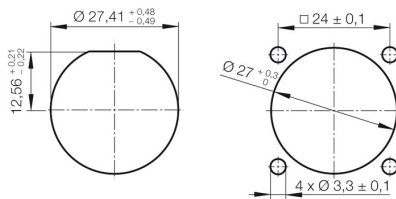
Downloads

Approval/Certificate/Document of Conformity	DUXR.E316369
Engineering Data	STEP
Engineering Data	WSCAD
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Designation key / Type key Manual

IE-BS-V01P-RJ45-C

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings**Installation cut-out**

Mounting cut-out: 1. With central screw connection / 2. For mounting with four M3 screws